

Swim-Lift® Gallatin/Lolo Accessories



Spectra-Force™ Pressure Booster System

The Spectra-Force™ system is used to generate water pressure for the operation of the water powered Swim-Lift® series assisted access lifts (55 psi is recommended operating pressure).

Unit may be floor or wall mounted. The Spectra-Force™ system consists of a 1/2 HP stainless steel centrifugal pump, hydro-pneumatic pressure-sustaining tank, adjustable pressure switch, liquid filled pressure gauge, bronze check valve, fittings and all necessary tubing connectors.

27028 The Spectra-Force™ Pressure Booster System

Weight: 50 lbs.



Swim-Lift® Protective Cover

Protect your Swim-Lift® model Gallatin WP400 and Lolo WP400 when not in use. This is an indoor/outdoor polyethylene cover which prevents patrons from playing or tampering with your Swim-Lift®. It is easy to deploy and folds up for easy storage.

27364 Swim-Lift® Protective Cover for Gallatin/Lolo WP400

Weight: 5 lbs.



27400 Gallatin/Lolo Retro-Fit Anchor (existing installation)

Weight: 2 lbs.



27450 Gallatin/Lolo Preset Anchor (new construction)

Weight: 5 lbs.



20400 Water Box (new construction)

Weight: 11 lbs.

54372 Attachment for Rim Flow Gutters

Weight: 2 lbs.


Swim-Lift® Lolo WP400

Stainless Steel Water Powered Assisted Access Lift

The Lolo is designed to accommodate in-ground pools with a minimum deck to pool bottom dimension of 42" (typically 36" water depth). Standard units will accommodate various anchor locations of 18" to 30" from the pool wall.

- ✓ The Lolo has a 400 pound lifting capacity
- ✓ ADA/ABA Compliant and Title 24: California Code of Regulations

Same features as the Gallatin WP400

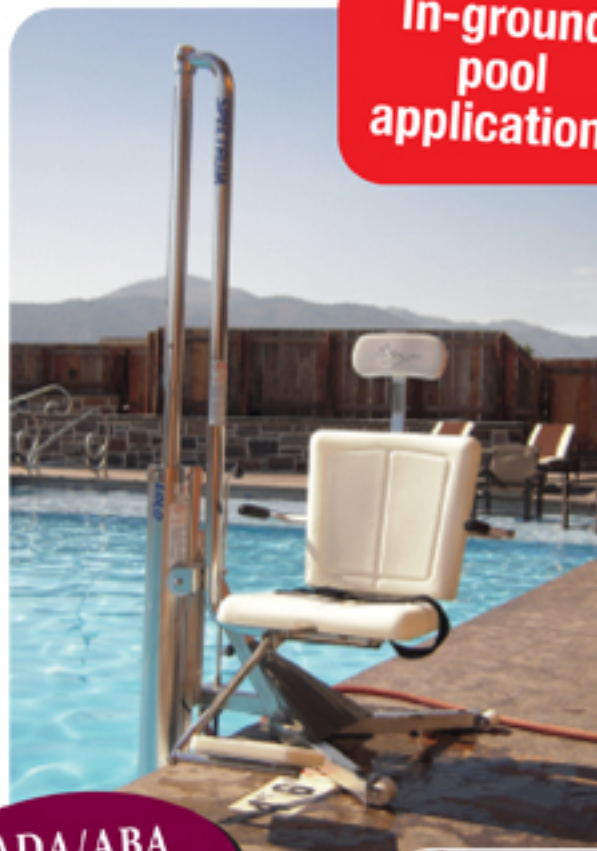

In-ground pool applications

ADA/ABA COMPLIANT

27550 Lolo WP400

Weight: 220 lbs.

Anchors and accessories sold separately



Field measurements required

