


4' 6" STANCHION

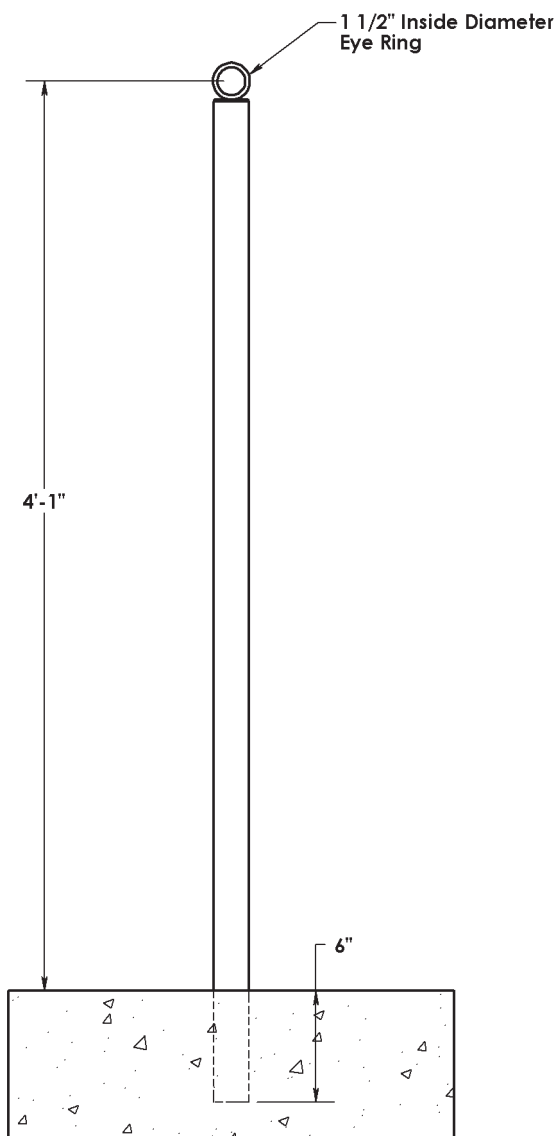

- APPROVED
- REVISE AND RESUBMIT
- APPROVED AS CORRECTED
- REJECTED
- SUBMIT SPECIFIED ITEM

Approval is only for conformance with the design concept of the Project and compliance with the information given in the Contract Documents. Contractor is responsible for dimensions to be confirmed and correlated at the job site for information that pertains solely to the fabrication process or to techniques of construction, and for coordination of the work of all trades.

Signature _____ Date _____

**Note: Drawings not to scale. Specifications are nominal and are subject to change.*



4' 6" Stanchion Post

The stanchion post shall be fabricated of 1.90" O.D. x ____ (.065 for number 23620, .109 for number 23622, .145 for number 23624) inches wall thickness 300 series stainless steel. It shall be 54" in overall length and have a 2" ring M.I.G. welded to its top surface.

Anchor

The stanchion post shall be supported by one (1) 6" 300 series stainless steel slip-type anchor.

Sliding Collar

The stanchion post shall be supplied with a 300 series stainless steel sliding collar. The sliding collar shall have a 2" ring M.I.G. welded to its outer surface and be supplied with a thumb screw for easy adjustment.

Warranty

Two year limited warranty.

