

KHYBER RACKS: LOADING INSTRUCTIONS


Load bikes from left to right, and unload right to left.

Stand on the right side of the bike, and grab the middle of the fork leg and middle of the seat tube. Lift and drop the front wheel into the basket.

Secure the front and then rear wheel using the SPEEDLOCK™ tie downs before loading the next bike.

MTB tires: Place the tire as far into the folded corner of the basket as possible.

Road/Gravel/narrow tires: Route the rope through one of the slots first, to keep the tire away from the corner of the basket. This prevents the tire sidewall from touching the metal edge which may damage the tire, and prevents the spokes from resting on the basket tubing, which may damage the spokes. See diagram below for details.

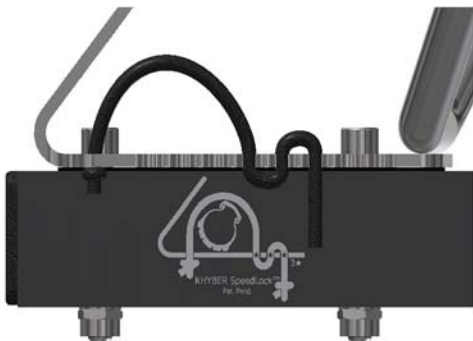

MTB Tires



Road/Gravel/Narrow Tires



Continued on next page....



The rear wheel must be secured using all 3 slots on the rear wheel mount.

WARNING: THE ROPE MUST PASS THROUGH THREE ADJACENT SLOTS TO BE SECURE. FAILURE TO DO SO MAY RESULT IN THE BIKE FALLING OFF THE RACK, CAUSING A SERIOUS ACCIDENT TO OTHER ROAD USERS, PROPERTY DAMAGE, INJURY OR DEATH. USE THE SLOTS IN THE FRONT WHEEL BASKET THAT ARE MOST SUITABLE FOR THE TIRE SIZE.

Do not operate the vehicle without securing both wheels!

