


### Overview

### HPE ProLiant BL460c Gen9 Server Blade

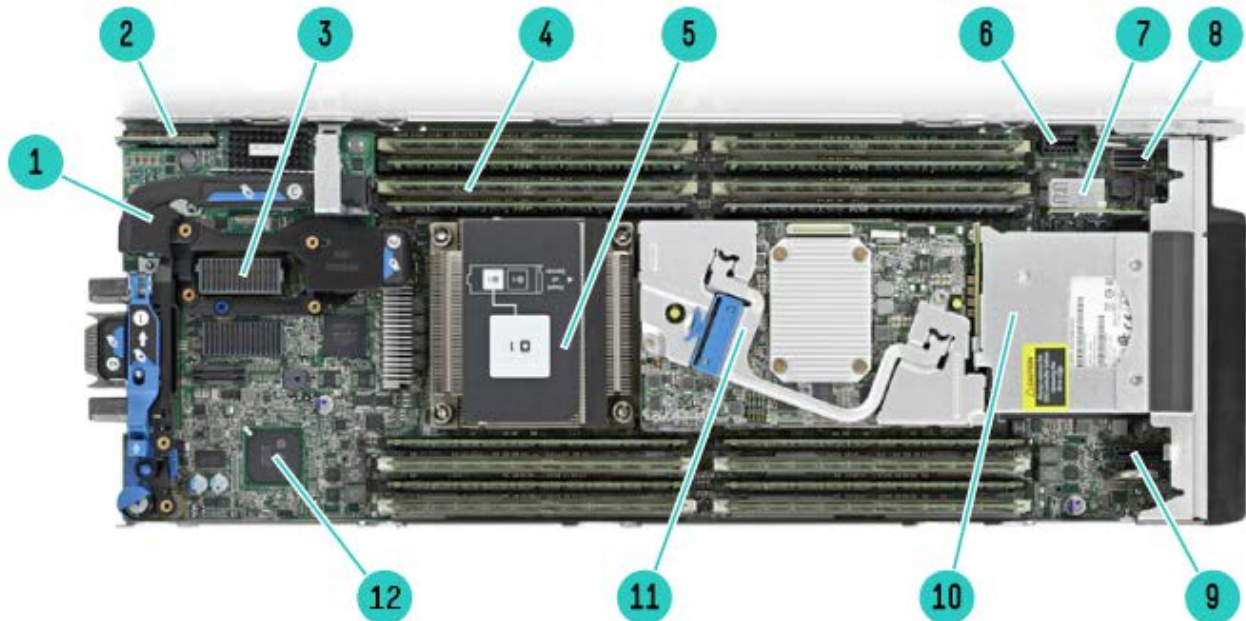

#### HPE ProLiant BL460c Gen9 Server Blade – Internal View

1. FlexibleLOM adapter
2. Nand Flash & Micro SD
3. Mezzanine Slots (x16 PCI 3.0)
4. Sixteen (16) DDR4 DIMM slots (8 per processor)
5. Up to two (2) Intel® Xeon® E5-2600 v3 or v4 family processors
6. HPE BLc 12W Smart Storage Battery connector
7. USB 3.0 and TPM
8. Embedded SATA Connector
9. Solid State Device Connector
10. Two hot-plug drive bays
11. HPE Smart Array P244br Controller with 1GB FBWC
12. iLO Management Engine

### What's New

- Workload acceleration with NVMe SSDs
- Support for 2400MT/s DDR4 memory
- Support for the Intel E5-2600 v4 Product Family

## Standard Features

**NOTE:** This document covers the HPE ProLiant BL460c Gen9 server blade only. For information on HPE BladeSystems c-Class Enclosures and HPE BladeSystem c-Class Interconnect and Mezzanine Components, please see the following:

HPE BladeSystem c-Class Enclosures QuickSpecs:

- HPE BladeSystem c3000 Enclosure QuickSpecs at <https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128340.pdf>  
**NOTE:** The c3000 HPE c-Class enclosures have full backwards and forwards compatibility, existing server blades are supported in the new enclosures and any future server blades will be supported in the existing enclosures.
- HPE BladeSystem <https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128339.pdf>  
**NOTE:** The c7000 HPE c-Class enclosures have full backwards and forwards compatibility, existing server blades are supported in the new enclosures and any future server blades will be supported in the existing enclosures.
- HPE BladeSystem c-Class Interconnect and Mezzanine Components at <http://h18004.www1.hp.com/products/blades/components/c-class-interconnects.html>  
<http://h18004.www1.hp.com/products/blades/components/c-class-adapters.html>

**NOTE:** For optimal cooling and system performance the BL460c Gen9 Server Blade requires the c7000 enclosure to be configured with 10 fans and the c3000 enclosure to be configured with 6 fans.

**NOTE:** For proper BladeSystem operation, the minimum required versions of HPE Onboard Administrator and HPE Virtual Connect are required and available via the HPE Service Pack for ProLiant, please see

[http://h17007.www1.hp.com/us/en/enterprise/servers/products/service\\_pack/spp/index.aspx](http://h17007.www1.hp.com/us/en/enterprise/servers/products/service_pack/spp/index.aspx)

**NOTE:** For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

### Processor

One of the following depending on Model

#### E5-2600 v4 series Processors

HPE BL460c Gen9 Intel® Xeon® E5-2690v4 (2.6GHz/14-core/35MB/135W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2683v4 (2.1GHz/16-core/40MB/120W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2680v4 (2.4GHz/14-core/35MB/120W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2660v4 (2.0GHz/14-core/35MB/105W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2650v4 (2.2GHz/12-core/30MB/105W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2650Lv4 (1.7GHz/14-core/35MB/65W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2640v4 (2.4GHz/10-core/25MB/90W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2630v4 (2.2GHz/10-core/20MB/85W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2630Lv4 (1.8GHz/10-core/25MB/55W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2623v4 (2.6GHz/4-core/10MB/85W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2620v4 (2.1GHz/8-core/20MB/85W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2609v4 (1.7GHz/8-core/20MB/85W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2603v4 (1.7GHz/6-core/15MB/85W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2699v4 (2.2GHz/22-core/55MB/145W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2698v4 (2.2GHz/20-core/50MB/135W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2697v4 (2.3GHz/18-core/45MB/145W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2697Av4 (2.6GHz/16-core/40MB/145W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2695v4 (2.1GHz/18-core/45MB/120W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2667v4 (3.2GHz/8-core/25MB/135W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2643v4 (3.4GHz/6-core/20MB/135W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2637v4 (3.5GHz/4-core/15MB/135W)

#### E5-2600 v3 series Processors

## Standard Features

HPE BL460c Gen9 Intel® Xeon® E5-2690v3 (2.6GHz/12-core/30MB/135W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2680v3 (2.5GHz/12-core/30MB/120W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2670v3 (2.3GHz/12-core/30MB/120W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2683v3 (2GHz/14-core/35MB/120W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2698v3 (2.3GHz/16-core/40MB/135W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2695v3 (2.3GHz/14-core/35MB/120W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2637v3 (3.5GHz/4-core/15MB/135W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2697v3 (2.6GHz/14-core/35MB/145W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2667v3 (3.2GHz/8-core/20MB/135W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2643v3 (3.4GHz/6-core/20MB/135W)  
 HPE BL460c Gen9 Intel® Xeon® E5-2699v3 (2.3GHz/18-core/45MB/145W)

**NOTE:** All processors within the server must be identical.

**NOTE:** DIMM slots 4 and 5 are not accessible when the E5-2699 v4, E5-2697 v4, E5-2697A v4, E5-2667 v4, E5-2643 v4, E5-2637 v4, E5-2699 v3, the E5-2697 v3, the E5-2643 v3, the E5-2637 v3, or the E5-2667 v3 is used. In a 2 processor configuration, there are twelve (12) total available DIMM slots.

**NOTE:** For the maximum supported memory speeds for each processor listed above, please reference the 'Memory Speed by Processor Model' table in the Memory section of the QuickSpecs.

**NOTE:** All processors support Intel® Hyper-Threading and Intel® Turbo Boost Technologies except the E5-2609 v4, E5-2603 v4, E5-2603 v3 and E5-2609 v3.

**NOTE:** DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

**NOTE:** Supports 1 or 2 processors. Mixing different processor models is not supported.

**NOTE:** For the Intel® C610 Chipset E5-2600 v3 and v4 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, and x = L for low power SKUs.

**NOTE:** The BL460c Gen9 includes two I/O mezzanine expansion slots. A processor must be installed in processor slot 1 for access to the first mezzanine expansion slot (expansion slot 1). A processor must be installed in processor slot 2 for access to the second mezzanine expansion slot (expansion slot 2).

**NOTE:** The letter "L" following the model number indicates denotes lower wattage.

### Cache Memory

One of the following depending on Model

55MB (1x55MB) L3 cache

**NOTE:** For Twenty two-core processors.

50MB (1x50MB) L3 cache

**NOTE:** For Twenty-core processors.

45MB (1x45MB) L3 cache

**NOTE:** For Eighteen-core processors.

40MB (1x40MB) L3 cache

**NOTE:** For Sixteen-core processors.

## Standard Features

35MB (1x35MB) L3 cache

**NOTE:** For Fourteen-core processors.

30MB (1x30MB) L3 cache

**NOTE:** For Twelve-core processors.

25MB (1x25MB) L3 cache

**NOTE:** For Ten or Eight-core processors.

20MB (1x20MB) L3 cache

**NOTE:** For Six, Eight, or Ten-core processors.

15MB (1x15MB) L3 cache

**NOTE:** For Quad or Six-core processors.

10MB (1x10MB) L3 cache

**NOTE:** For Quad-core processors.

---

### Chipset

Intel® C610 Series Chipset

Intel® E5-2600 v3 or v4 Processor Family

**NOTE:** For more information regarding Intel chipsets, please see the following:

**<http://www.intel.com/content/www/us/en/chipsets/chipsets-overview.html>**

---

### Upgradeability

Upgradeable to two (2) processors

---

### On System Management Chipset

HPE iLO (Firmware HPE iLO4 2.0), 4GB NAND with 1GB USB user space configurable via UEFI and accessible via iLO. Read and learn more in the **[iLO QuickSpecs](#)**.

**NOTE:** For more information, visit: **<https://www.hpe.com/us/en/servers/integrated-lights-out-ilo.html>**

---

### Memory Protection

Advanced ECC

Memory Mirroring

Memory Online Spare Mode (Rank Spare Mode)

---

### Memory

One of the following depending on Model

Type

HPE SmartMemory

DDR4 Load Reduced (LRDIMM), or Registered (RDIMM)

Standard (Pre-configured Models)

256GB (8 x 32GB) DDR4 2400MT/s LDIMMs at 1.2V  
 128GB (4x 32GB) DDR4 2400MT/s LDIMMs at 1.2V  
 64GB (4 x 16GB) DDR4 2400MT/s RDIMMs at 1.2V  
 32GB (2 x 16GB) DDR4 2400MT/s RDIMMs at 1.2V  
 16GB (2 x 8GB) DDR4 2400MT/s RDIMMs at 1.2V  
 128GB (4 x 32GB) DDR4 2133MT/s RDIMMs at 1.2V  
 64GB (4 x 16GB) DDR4 2133MT/s RDIMMs at 1.2V  
 32GB (2 x 16GB) DDR4 2133MT/s RDIMMs at 1.2V  
 32GB (2 x 16GB) DDR4 2133MT/s RDIMMs at 1.2V  
 16GB (2 x 8GB) DDR4 2133MT/s RDIMMs at 1.2V  
 16GB (2 x 8GB) DDR4 2133MT/s RDIMMs at 1.2V

Maximum (LRDIMM) 2TB (16 x 128GB) up to 2400MT/s at 1.2V

Maximum (RDIMM) 512GB (16 x 32GB) up to 2133MT/s at 1.2V

**NOTE:** HPE memory from previous generation servers (DDR3) is not compatible with this server. HPE

## Standard Features

SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the HPE SmartMemory QuickSpecs at: <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111165>

**NOTE:** LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

**NOTE:** Depending on the memory configuration and processor model, the memory speed may run at 2400MT/s, 2133MT/s, 1866MT/s, or 1600MT/s. Please see **Memory Population Table** or the Online

Memory Configuration Tool at: <https://h22195.www2.hpe.com/DDR4memoryconfig/Home/SelectServer>

### Network Controller

One of the following depending on Model

One (1) 20Gb 2-port FlexFabric FLB, 10Gb 2-port HPE FlexFabric FLB, or 10Gb 2-port Ethernet FLB  
**NOTE:** Supports FCoE, , TCP/IP offload engine, hardware-based accelerated iSCSI, iSCSI boot, and autosensing 10Gb/1Gb Ethernet.

**NOTE:** Each port is autosensing the speed, and can interoperate with 1Gb HPE BladeSystem c-Class interconnect components. Both ports will operate at the same speed.

**NOTE:** FlexFabric capabilities require the use of an HPE Virtual Connect FlexFabric or Flex10/10D module module.

**NOTE:** Fibre Channel over Ethernet (FCoE) is supported with HPE interconnects. Learn more at:

<https://www.hpe.com/us/en/integrated-systems/virtual-connect.html>

One (1) HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM

One (1) HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM

**NOTE:** FlexibleLOMs are not compatible with prior generation c-Class server blades

Standard iLO Network Controller:

One (1) 10/100 Mbps port for the HPE iLO 4 to Onboard Administrator link. The Onboard Administrator (with 10/100/1000 Mbps) to BladeSystem link is 1Gbps

### Expansion Slots

Two (2) I/O expansion mezzanine slots:

- x16 PCIe 3.0 Type A (supports Type A mezzanine cards) (expansion slot 1).  
**NOTE:** This expansion slot supports dual-port mezzanine cards: one port is routed to interconnect module bay 3 and the other to bay 4.
- x16 PCIe 3.0 Type B (supports Type A and Type B mezzanine cards) (expansion slot 2).  
**NOTE:** This expansion slot supports dual-port and quad-port mezzanine cards. For dual-port cards, one port is routed to interconnect module bay 5 and the other to bay 6. For quad-port cards, one port is routed to interconnect module bay 5, one to bay 6, one to bay 7, and one to bay 8.  
**NOTE:** A second processor must be installed (in processor slot 2) to have access to the second expansion slot (expansion slot 2).

Mezzanine card options include:

- Dual-port 20Gb FlexFabric, Dual-port 10Gb FlexFabric, 10GbE options, and quad-port 1Gb Ethernet server adapter mezzanine options for additional network ports.
- Dual-port 16Gb Fibre Channel HBA for SAN connectivity.
- QDR and FDR InfiniBand for low latency and high bandwidth server interconnectivity.
- I/O accelerator mezzanine options for high transaction rate local storage

### HPE Server ROM

HPE ROM (read only memory) is now digitally signed using the HPE Corporate Signing Service. This signature is verified before the flash process starts, reducing accidental programming and preventing malicious efforts to corrupt system ROM.

HPE ROM provides for essential initialization and validation of hardware components before control is passed to the customer-installed operating system. The ROM also provides the capability of booting from various fixed media (HDD, CD-ROM) and removable media (USB), to continue operation to the operating system.

## Standard Features

HPE ROM performs very early configuration of the video controller, to allow monitoring of initialization progress via an attached monitor. If configuration or hardware errors are discovered during this early phase of hardware initialization, suitable messages are now displayed on the connected monitor. Additionally, these configuration or hardware errors are logged to the Integrated Management Log (IML) to assist in diagnosis.

The HPE ProLiant ROM is used to configure the following:

- Processor and chipset status registers
- System memory, memory map, and memory initialization
- System hardware configuration (integrated PCI devices and optional PCIe cards).
- Customer-specific BIOS configuration using the HPE ROM-Based Setup Utility (RBSU).

**NOTE:** For further information, please refer to the HPE RBSU (ROM based setup utility) user guide: <http://h20564.www2.hp.com/hpsc/doc/public/display?docId=c00191707>

### HPE Server UEFI /Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration while interacting with your server at boot time. HPE ProLiant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode.

**NOTE:** The UEFI System Utilities function is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hp.com/ctg/Manual/c04398276.pdf>

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using HPE RESTful API
- PXE boot support for IPv6 networks
- Boot support for option cards that only support a UEFI option ROM

**NOTE:** For more information please visit <http://www.hp.com/ctg/Manual/c04398276.pdf>

**NOTE:** For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

**NOTE:** HPE UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory.

### Storage Controller All Pre-configured Models

One (1) HPE Smart Array P244br Controller with 1GB Flash-Backed Write Cache (FBWC) supporting RAID 0 and RAID 1, or HPE H244br Smart HBA.

**NOTE:** The HPE Smart Array P244br, the HPE H244br Smart HBA, and the HPE B140i (chipset SATA). Support two (2) small form factor (SFF) hot plug drive bays.

**NOTE:** For NVMe support, please select the NVMe FIO setting (825555-B21) available on Factory Integrated models only.

### Maximum Internal Storage One of the following depending on Model

Hot Plug SFF SAS	4.0TB	2 x 2.0TB
Hot Plug SFF SATA	4.0TB	2 x 2.0TB
Hot Plug SFF SAS SSD	7.68TB	2 x 3.84TB
Hot Plug SFF SATA SSD	7.68TB	2 x 3.84TB
Hot Plug SFF NVMe SSD	4.0TB	2 x 2.0TB

**NOTE:** The ProLiant BL460c Gen9 server includes the HPE hot plug small form factor (SFF) SmartDrive carrier for enhanced management and reduced maintenance errors. HPE drives from previous generation

## Standard Features

servers (prior to Gen8) are not compatible with the ProLiant BL460c Gen9 drive bays.

---

<b>Interfaces</b>	Micro SDHC Slot	One (1) internal Micro Secure Digital High Capacity (Micro SDHC) card slot
	USB 3.0 Port	One (1) internal USB 3.0 connector for USB flash media drive keys

**NOTE:** The above options are intended for integrated hypervisor virtualization environments.

---

<b>Industry Standard Compliance</b>	ACPI 2.0
	Microsoft® Logo certifications
	USB 3.0 Support
	IPMI 2.0
	Secure Digital 2.0
	TPM 1.2 Support
	IEEE (specific IEEE standards depending on Ethernet adapter card(s) installed)
	Advanced Encryption Standard (AES)
	Triple Data Encryption Standard (3DES)
	SNMP
	SSL 2.0
	DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP)
	Active Directory v1.0
	PCIe 3.0
ASHRAE A3	
FIPS 140-2 Level-1 certification	
Energy Star	

**NOTE:** Energy Star Family level certification covering all BL460c Gen9 E5-2600 v3 configurations that do not include the Intel Xeon E5-2699v3 processor. For more information, visit

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdata/energystarservers.html>

---

<b>Operating Systems and Virtualization Software Support for ProLiant Servers</b>	Microsoft Windows Server
	Red Hat Enterprise Linux (RHEL)
	SUSE Linux Enterprise Server (SLES)
	Canonical Ubuntu
	Oracle Solaris
VMware	

**NOTE:** For more information on the HPE Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at:

<http://www8.hp.com/us/en/products/servers/management/operating-environments/os-support-matrix.html> and our driver download page:

<http://www8.hp.com/us/en/products/proliant-servers/product-detail.html?oid=7271227>

---

<b>Enclosures</b>	Hewlett Packard Enterprise offers two different c-Class server blade enclosures to meet your individual needs:
	<ul style="list-style-type: none"> <li>The HPE BladeSystem c7000 rack enclosure is 10U high and holds up to sixteen (16) ProLiant BL460c Gen9 servers plugged vertically.</li> <li>The HPE BladeSystem c3000 rack enclosure is 6U high and holds up to eight (8) HPE ProLiant BL460c Gen9 servers plugged horizontally.</li> </ul>

Server blades, interconnect modules, power supplies, fans, and redundant Onboard Administrator modules are all designed to fit into the c3000 and c7000 enclosures.

**NOTE:** For additional enclosure information, please see:

<http://h18004.www1.hp.com/products/blades/components/enclosures/c-class/index.html>

## Standard Features

---

<b>Graphics</b>	<p>Integrated Matrox G200eh video controller</p> <ul style="list-style-type: none"> <li>• 1600 x 1200 (32 bpp)</li> <li>• 1920 x 1200 (16 bpp)</li> </ul> <p>HPE iLO Management On System Management Memory</p> <ul style="list-style-type: none"> <li>• 16 MB Flash Video Memory</li> <li>• 256 MB DDR 3 with ECC (112 MB after ECC and video)</li> </ul>
<b>Form Factor</b>	HPE ProLiant BL460c Gen9 is a half-height server blade that plugs into the HPE BladeSystem c3000 and c7000 enclosures.
<b>Embedded Management</b>	<p><b>HPE Integrated Lights Out</b> Monitor your servers for ongoing management, service alerting, reporting and remote management with iLO. Learn more at <a href="https://www.hpe.com/us/en/servers/integrated-lights-out-ilo.html">https://www.hpe.com/us/en/servers/integrated-lights-out-ilo.html</a></p> <p><b>UEFI</b> Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <a href="http://www8.hp.com/us/en/products/server-software/product-detail.html?oid=6935826">http://www8.hp.com/us/en/products/server-software/product-detail.html?oid=6935826</a>.</p> <p><b>HPE RESTful API</b> RESTful API is an application programming interface. RESTful Web Service API served by iLO's web server. <a href="https://www.hpe.com/us/en/servers/restful-api.html">https://www.hpe.com/us/en/servers/restful-api.html</a>.</p> <p><b>Intelligent Provisioning</b> Provision servers by discovering and deploying 1 to few servers with Intelligent Provisioning. Learn more at <a href="http://h17007.www1.hpe.com/us/en/enterprise/servers/products/service_pack/hpsum/index.aspx">http://h17007.www1.hpe.com/us/en/enterprise/servers/products/service_pack/hpsum/index.aspx</a></p>
<b>Server Utilities</b>	<p><b>HPE Smart Update</b> Optimize firmware and driver updates with HPE Smart Update solutions. Learn more at <a href="http://h17007.www1.hpe.com/us/en/enterprise/servers/products/service_pack/hpsum/index.aspx">http://h17007.www1.hpe.com/us/en/enterprise/servers/products/service_pack/hpsum/index.aspx</a></p> <p><b>HPE Systems Insight Manager (HPE SIM)</b> HPE SIM allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers, and also provides you with basic support for non-Hewlett Packard Enterprise servers. HPE SIM also integrates with HPE SUM to provide quick and seamless firmware updates. Learn more at <a href="http://www8.hp.com/us/en/products/server-software/product-detail.html?oid=489496">http://www8.hp.com/us/en/products/server-software/product-detail.html?oid=489496</a></p> <p><b>Scripting Tool Kit and Windows PowerShell</b> Provision 1 to many servers using your own scripts to discover and deploy them with HPE Scripting Tool Kit for Windows and Linux or HPE Scripting Tools for Windows PowerShell.</p> <p><b>HPE RESTful Interface Tool</b> HPE RESTful API tool is a scripting tool to provision servers using RESTful API Interface to discover and deploy servers at scale. Learn more at <a href="https://www.hpe.com/us/en/servers/restful-api.html">https://www.hpe.com/us/en/servers/restful-api.html</a></p> <p><b>HPE iLO Mobile Application</b> Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <a href="http://www8.hp.com/us/en/products/servers/ilo/mobile.html">http://www8.hp.com/us/en/products/servers/ilo/mobile.html</a></p>



## Standard Features

**HPE Insight Online** HPE Insight Online, available at no additional cost as part of your HPE warranty, Care Pack or contractual support agreement with Hewlett Packard Enterprise, is a personalized dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at <http://h20564.www2.hp.com/hpsc/doc/public/display?docId=c03178991>

---

### Security

- Power-on password
- Administrator's password
- Keyboard password (QuickLock)
- HPE iLO Management On System Management Chipset with:
  - SSL encryption
  - Secure Shell version 2
  - Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser, CLP and XML scripting interface
  - AES and RC4 encryption of video
- External USB port enable/disable
- Network server mode
- Serial interface control
- TPM (Trusted Platform Module) 2.0 option
- Advanced Encryption Standard (AES)
- Intel® Advanced Encryption Standard-New Instructions (AES-NI)
- FIPS 140-2 Level-1 certification

---

### Availability

#### Memory

- Advanced ECC uses single device data correction (SDDC) to detect and correct single and all multi-bit error that occurs within a single DRAM chip. Both x4 and x8 SDDC are supported (x8 requires lockstep mode).
- Memory online spare mode (also known as rank spare mode) detects a rank that is degrading and switches operation to the spare rank.
- Memory demand and patrol scrubbing to prevent accumulation of correctable errors and reducing the likelihood of unplanned downtime.
- Failed DIMM isolation improves the service time thus improving the overall system availability.
- Address parity protection available on RDIMMs and LRDIMMs detects address bit errors to improve service time and overall system availability.

#### Mezzanine options and I/O

- Support for one (1) FlexibleLOM, providing two (2) (i.e. redundant) Ethernet ports
- Multiple mezzanine I/O expansion slots that support a wide variety of mezzanine cards each supporting multiple data paths routed to redundant interconnect modules.
- Network Adapter Teaming (bonding) provides network fault tolerance, transmit load balancing, and switch-assisted load balancing.

#### Storage

- Two (2) Small Form Factor hot-plug SAS/SATA HDD or SSD or NVMe SSD drive bays.
- Choice of the HPE Smart Array P244br Controller with 1GB FBWC, HPE Smart HBA H244br, or the HP B140i (chipset SATA). RAID 0 and 1 support for all three storage controller offerings.
- Optional dual-port Fibre Channel mezzanine card(s) for redundant SAN connections.  
**NOTE: For NVMe support, please select the NVMe FIO setting (825555-B21) available on CTO models only.**

#### Processor/Chipset

- Processor internal sensors & thermal control protection against over-temperature conditions.
- Cache parity/ECC protects cache data from accidental data corruption.

## Standard Features

- Machine Check Architecture (MCA) detects and captures hardware errors such as system bus, memory ECC, parity, and cache, and improves service time.
- Intel® QPI Protocol Protection allows detection of data errors using a checksum of 8-bits.
- Core Disable for FRB (fault resilient boot) allows a system to power-on despite a failing core-pair. It uses BIST (built-in self-test) results to detect a failure and disables the target core-pair upon subsequent boot.

### Server Blade Enclosure Infrastructure

- Pooled power for true N+N power redundancy through up to six (6) hot-plug, high-efficiency, common slot enclosure-based power supplies (configuration dependent).
- Up to ten (10) enclosure-based hot-plug HPE Active Cool fans that scale to meet future demands, optimize airflow, reduce power draw, and improve acoustic performance.
- Dual grid power providing redundant rack enclosure power feeds to the server blade enclosure.
- HPE Dynamic Power Saver Mode monitors the total enclosure power consumption in real time and automatically adjusts with change in demand for improved efficiency and reliability. HPE Dynamic Power Capping safely limits power usage without impacting performance by capping peak usage instead of average power usage, removes risk to electrical infrastructure with a fast-acting, hardware-based capping algorithm, and reclaims more power by dynamically controlling power limits based on workload demand.
- Up to eight interconnect modules per server blade enclosure providing four simultaneous redundant fabrics for FlexFabric, Virtual Connect Ethernet, Fibre Channel, InfiniBand, Pass Thru Ethernet, etc.
- Enclosure crosslinks between adjacent enclosures to provide interconnect module-to-module connections or as Virtual Connect module stacking links.
- Optional enclosure redundant Onboard Administrator system management module.

---

## Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Care Pack services or customized service agreements. Certain restrictions and exclusions apply. Hard drives have either a one year or three year warranty; refer to specific hard drive QuickSpecs for details.

**NOTE:** Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at

<http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>.

## Optional Features

<b>Fibre Channel Support</b>	Up to two (2) optional Fibre Channel mezzanine HBAs are supported on the HPE ProLiant BL460c Gen9.	
<b>Compatible SAN</b>	HPE ProLiant BL460c Gen9 server blades are optimized for HPE MSA, EVA, 3PAR and XP. HPE ProLiant BL460c Gen9 server blades are compatible with select 3rd party SANs. Please see blade storage page for more details at <a href="https://www.hpe.com/us/en/integrated-systems/bladesystem.html">https://www.hpe.com/us/en/integrated-systems/bladesystem.html</a> .	
<b>HPE Virtual Connect</b>	<p>HPE Virtual Connect is an interconnect option for c-Class BladeSystem that simplifies server connectivity to data and storage networks, and reduces costs. Unique HPE Flex-10 technology makes maximum use of network bandwidths, provide dynamic tuning and enable extreme flexibility to meet individual server and infrastructure requirements by allocating up to 4 network connections per server port. Virtual Connect FlexFabric modules extend those capabilities to allocate one function per port to storage connections (FCoE).</p> <p>HPE OneView's software-defined approach to infrastructure management enables central console to administer network connections and workloads for thousands of servers, see <a href="https://www.hpe.com/us/en/integrated-systems/management-software.html">https://www.hpe.com/us/en/integrated-systems/management-software.html</a></p> <p>For more information on Virtual Connect Ethernet, Fibre Channel, Converged Network and management options, see <a href="https://www.hpe.com/us/en/integrated-systems/virtual-connect.html">https://www.hpe.com/us/en/integrated-systems/virtual-connect.html</a></p>	
<b>Embedded Management</b>	<b>iLO Advanced for BladeSystem</b>	HPE iLO Advanced for BladeSystem licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at <a href="https://www.hpe.com/us/en/servers/integrated-lights-out-ilo.html">https://www.hpe.com/us/en/servers/integrated-lights-out-ilo.html</a> .
<b>Server Management</b>	<b>HPE Insight Control</b>	HPE Insight Control, lets you deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see <a href="http://www8.hp.com/us/en/products/server-software/product-detail.html?oid=3312156">http://www8.hp.com/us/en/products/server-software/product-detail.html?oid=3312156</a>
	<b>HPE OneView</b>	Powerful converged management of servers, storage, and network for IT service automation and infrastructure simplicity.
	<b>HPE Matrix Operating Environment</b>	<p>The HPE Matrix Operating Environment (Matrix OE) for ProLiant and Integrity servers is an integrated command center that helps you instantly adjust to dynamic business demands. This advanced infrastructure management software lets you reduce the cost of common data center tasks by up to 40 percent while keeping pace with your changing business. The HPE Matrix OE includes the automated provisioning, optimization, and recovery management capabilities for HPE CloudSystem Matrix, the ideal platform for private cloud and Infrastructure as a Service (IaaS).</p> <p>For more information, visit: <a href="http://h20392.www2.hpe.com/portal/swdepot/displayProductInfo.do?productNumber=HPID">http://h20392.www2.hpe.com/portal/swdepot/displayProductInfo.do?productNumber=HPID</a></p>
	<b>HPE Insight Cluster</b>	HPE Insight Cluster Management Utility is a Hyperscale management framework that

## Optional Features

**Management Utility (CMU)** includes software for the centralized provisioning, management and monitoring of nodes and infrastructure.

Learn more at <http://www8.hp.com/us/en/products/server-software/product-detail.html?oid=3296361>

---

**High Performance Clusters** **HPE Cluster Platforms** HPE Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering.

<http://www8.hp.com/us/en/products/servers/scalable-systems/clusterplatform.html>

**HPE HPC Interconnects** High Performance Computing (HPC) interconnect technologies are available for this server as part of the HPE Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by Hewlett Packard Enterprise when integrated within an HPE cluster. Flexible, validated solutions can be defined with the help of configuration tools.

---

**Storage Software** Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HPE storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.

Storage software that gets the job done:

- **Data Protection and Recovery Software**  
Whether you're a large enterprise or a smaller business, HPE data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.
- **Data Archive and Migration Software**  
The HPE storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.
- **Storage Resource Management Software (SRM)**  
The HPE storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.
- **Data Replication Software**  
Hewlett Packard Enterprise offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.
- **Storage Device Management Software**  
Maximize your investment in HPE storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.
- **HPE StoreVirtual VSA**  
HPE StoreVirtual VSA allows you to create fully featured shared storage on a VMware vSphere or Microsoft Hyper-V virtualized server. This server model starting November 2013, includes a limited license for HPE StoreVirtual VSA software with 1TB of capacity. To download the license key and StoreVirtual VSA software, visit:

<http://www8.hp.com/us/en/products/storage-software/product-detail.html?oid=5306917>

**NOTE:** You will need your server serial number in order to complete the registration form. Fully functional, capacity-based licenses are available in 4TB, 10T and 50TB sizes.

**NOTE:** For more information available Storage Software including QuickSpecs, please see:

## Optional Features

<http://www.hpe.com/storage>

---

**HPE Insight Online** HPE Insight Online is part of the HPE Support Center for one stop, secure access to product and HPE support information personalized to your IT environment. Insight Online can automatically display devices remotely monitored by HPE Remote Support tools. With Insight Online's easy navigation you can efficiently track your IT support contracts and device status from anywhere and at anytime.

<https://h20392.www2.hpe.com/portal/swdepot/displayProductInfo.do?productNumber=RSSWMBASE>

---

**Get connected to HPE** **To** get the most from your investment in Hewlett Packard Enterprise servers, get connected to Hewlett Packard Enterprise using our innovative remote support technology which provides system health monitoring, pre-failure alert notification and more.

---

**Expansion Blade Support** Supports one (1) optional D2220sb storage or PCI expansion blade

**NOTE:** Expansion blade support requires the use of either the HPE Dynamic Smart Array B140i or the HPE Smart Array P246br controller.

**NOTE:** Expansion blade support requires server firmware versions from SPP 2015.04 or later.

---

**Factory Express Portfolio for Servers and Storage** HPE Factory Express offers configuration, customization, integration and deployment services for Hewlett Packard Enterprise servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. Hewlett Packard Enterprise products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services on your specific server model please contact your sales representative or go to: <http://www8.hp.com/us/en/campaigns/factory-express/server-storage-networking.html>

---

**HPE Simple Configurator** SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact the HPE Customer Business Center or an Authorized Partner for assistance.

<https://h22174.www2.hp.com/SimplifiedConfig/Index>

## Recommended Support Services for BL460

<b>Service and Support</b>	<p><b>Protect your business beyond warranty with HPE Support Services</b> HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to Hewlett Packard Enterprise to help prevent problems and solve issues faster HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement for the support for need for your IT and business.</p> <p><b>Connect your devices</b> Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%<sup>1</sup> reduction in down time, near 100%<sup>2</sup> diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to Hewlett Packard Enterprise support.</p> <p>1 – IDC 2 – HP CSC reports 2014 - 2015</p>
<b>Optimized Support recommendation</b>	<p><b>HPE Proactive Care Advanced</b> - 24x7 coverage, three year Support Service This services helps achieve a higher return on your product investment with personalized support from a local assigned Account Support Manager who will share best practice advice and personalized recommendations designed to help improve availability and performance to increase stability and reduce unplanned downtime. Leverage your system's ability to connect to Hewlett Packard Enterprise for pre-failure alerts, automatic call logging and parts dispatch. For business critical incidents, this service offers critical event management to reduce mean time to resolution. This recommendation provides 24x7 coverage with four-hour response for hardware and collaborative support that offers two-hour callback for supported software issues. Collaborative software management is included with independent software vendors unless you have your software support from Hewlett Packard Enterprise where we own all cases from start through to resolution.</p> <p><a href="https://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA5-3259ENW&amp;cc=us&amp;lc=en">https://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA5-3259ENW&amp;cc=us&amp;lc=en</a></p>
<b>Standard Support recommendation</b>	<p><b>HPE Proactive Care - 24x7 coverage, three year Support Service</b> HPE Proactive Care gives customers an enhanced call experience plus helps preventing problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice when your products are connected to Hewlett Packard Enterprise. This Service combines three years' proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. In addition, this service includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc) running on your HPE servers.</p> <p><a href="https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf">https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf</a></p>
	<p><b>Parts and Materials</b> Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.</p> <p>Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services. The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.</p>
<b>Related Services</b>	<p><b>HPE Server Hardware Installation</b> Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.</p>

## Recommended Support Services for BL460

<https://www.hpe.com/h20195/V2/GetPDF.aspx/5981-9356EN.pdf>

### Data Center Care Services

HPE Datacenter Care helps improve IT stability and security, increase the value of IT, and enable agility and innovation. It is a structured framework of repeatable, tested, and globally available services “building blocks.” You can deploy, operate, and evolve your datacenter wherever you are on your IT journey. With HPE Datacenter Care, you benefit from a personalized relationship with Hewlett Packard Enterprise via a single point of accountability for HPE and others’ products. For more information, visit

<http://www8.hp.com/us/en/business-services/it-services/datacenter-care-services.html>

### Data Privacy Services

Protect your data through better media management. HPE Data privacy services help manage and protect sensitive data to reduce the risk of unauthorized access to private information and help meet compliance requirements. Our retention services allow you to keep drives and other devices upon failure with Defective Media Retention and Comprehensive Defective Material Retention, our removal services provide convenient data sanitization and our recovery services allow you to safely retire IT assets and capture any remaining value from the hardware.

<http://www.hp.com/services/dataprivacy>

### HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment.

For more information: <http://www.hpe.com/services>

## Models

**NOTE:** For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

**NOTE:** Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

**NOTE:** Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

**NOTE:** If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

**NOTE:** All Pre-configured Models come populated with some hard drive blanks installed.

### E5-2600 v4 series Processors

<b>HPE ProLiant BL460c Gen9 E5- 2609v4 1P 16GB- R Server</b>  813192-B21	<b>Processor(s)</b>	(1) Intel® Xeon® E5-2609 v4 (1.7GHz/8-core/20MB/6.4GT-s QPI/85W, DDR4-1866)
	<b>Cache Memory</b>	20MB (1x20MB) Level 3 cache
	<b>Memory</b>	16GB (2x 8GB) 2400MT/s (DDR4-2400) Registered DIMMs at 1.2V) <b>NOTE: Total of 16 DIMM slots. Only eight (8) usable with single processor.</b>
	<b>Network Controller</b>	HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart HBA H244br Controller with RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives <b>NOTE: NVMe SSDs not available on this model.</b>
	<b>Internal Storage</b>	SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure	
<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.	

<b>HPE ProLiant BL460c Gen9 E5- 2620v4 1P 16GB- R Server</b>  813193-B21	<b>Processor(s)</b>	(1) Intel® Xeon® E5-2620 v4 (2.1GHz/8-core/20MB/8GT-s QPI/85W, DDR4-2133)
	<b>Cache Memory</b>	20MB (1x20MB) Level 3 cache
	<b>Memory</b>	16GB (2x 8GB) 2400MT/s (DDR4-2400) Registered DIMMs at 1.2V) <b>NOTE: Total of 16 DIMM slots. Only eight (8) usable with single processor.</b>
	<b>Network Controller</b>	HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart HBA H244br Controller with RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives <b>NOTE: NVMe SSDs not available on this model.</b>
	<b>Internal Storage</b>	SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard)



## Models

	<b>Form Factor</b>	Optional: HPE OneView or HPE Insight Control Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure
	<b>Warranty</b>	Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.
<b>HPE ProLiant BL460c Gen9 E5-2640v4 1P 32GB-R Server</b>	<b>Processor(s)</b>	(1) Intel® Xeon® E5-2640 v4 (2.4GHz/10-core/25MB/8GT-s QPI/90W, DDR4-2133)
	<b>Cache Memory</b>	25MB (1x25MB) Level 3 cache
	<b>Memory</b>	32GB (2x 16GB) 2400MT/s (DDR4-2400) Registered DIMMs at 1.2V <b>NOTE: Total of 16 DIMM slots.</b>
813194-B21	<b>Network Controller</b>	HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart Array P244br Controller with RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives <b>NOTE: NVMe SSDs not available on this model.</b>
	<b>Internal Storage</b>	SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.
<b>HPE ProLiant BL460c Gen9 E5-2650v4 2P 64GB-R Server</b>	<b>Processor(s)</b>	(2) Intel® Xeon® E5-2650 v4 (2.2GHz/12-core/30MB/9.6GT-s QPI/90W, DDR4-2400)
	<b>Cache Memory</b>	30MB (1x30MB) Level 3 cache
	<b>Memory</b>	64GB (4x 16GB) 2400MT/s (DDR4-2400) Registered DIMMs at 1.2V <b>NOTE: Total of 16 DIMM slots.</b>
813195-B21	<b>Network Controller</b>	HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart Array P244br Controller with RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives <b>NOTE: NVMe SSDs not available on this model.</b>
	<b>Internal Storage</b>	SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.
<b>HPE ProLiant</b>	<b>Processor(s)</b>	(2) Intel® Xeon® E5-2660 v4 (2.0GHz/14-core/35MB/9.6GT-s QPI/105W, DDR4-2400)

## Models

<b>BL460c Gen9 E5-2660v4 2P 128GB-R Server</b>  813196-B21	<b>Cache Memory</b>	35MB (1x35MB) Level 3 cache
	<b>Memory</b>	128GB (4x 32GB) 2400MT/s (DDR4-2400) Registered DIMMs at 1.2V) <b>NOTE: Total of 16 DIMM slots.</b>
	<b>Network Controller</b>	HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart Array P244br Controller with RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives <b>NOTE: NVMe SSDs not available on this model.</b>
	<b>Internal Storage</b>	SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.	

<b>HPE ProLiant BL460c Gen9 E5-2680v4 2P 256GB-R Server</b>  813197-B21	<b>Processor(s)</b>	(2) Intel® Xeon® E5-2680 v4 (2.4GHz/14-core/35MB/9.6GT-s QPI/120W, DDR4-2400)
	<b>Cache Memory</b>	35MB (1x35MB) Level 3 cache
	<b>Memory</b>	256GB (8x 32GB) 2400MT/s (DDR4-2400) Registered DIMMs at 1.2V) <b>NOTE: Total of 16 DIMM slots.</b>
	<b>Network Controller</b>	HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart Array P244br Controller with RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives <b>NOTE: NVMe SSDs not available on this model.</b>
	<b>Internal Storage</b>	SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure	
<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.	

## E5-2600 v3 series Processors

<b>HPE ProLiant BL460c Gen9 E5-2609v3 1P 16GB-R H244br Entry Server</b>	<b>Processor(s)</b>	(1) Intel® Xeon® E5-2609 v3 (1.9GHz/6-core/15MB/6.4GT-s QPI/85W, DDR4-1600)
	<b>Cache Memory</b>	15MB (1x15MB) Level 3 cache
	<b>Memory</b>	16GB (2x 8GB) PC4-2133P-R (DDR4-2133) Registered DIMMs at 1.2V) <b>NOTE: Total of 16 DIMM slots. Only eight (8) usable with single processor.</b>
	<b>Network Controller</b>	HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart HBA H244br Controller with RAID 0,1

## Models

727026-B21	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives <b>NOTE: NVMe SSDs not available on this model.</b>
	<b>Internal Storage</b>	SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.
<b>HPE ProLiant BL460c Gen9 E5-2620v3 1P 16GB-R H244br Entry Server</b>	<b>Processor(s)</b>	(1) Intel® Xeon® E5-2620 v3 (2.40GHz/6-core/15MB/8.0GT-s QPI/85W, DDR4-1866, HT, Turbo2)
	<b>Cache Memory</b>	15MB (1x15MB) Level 3 cache
	<b>Memory</b>	16GB (2x 8GB) PC4-2133P-R (DDR4-2133) Registered DIMMS at 1.2V <b>NOTE: Total of 16 DIMM slots. Only eight (8) usable with single processor.</b>
727027-B21	<b>Network Controller</b>	HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart HBA H244br Controller with RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives <b>NOTE: NVMe SSDs not available on this model.</b>
	<b>Internal Storage</b>	SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.
<b>HPE ProLiant BL460c Gen9 E5-2640v3 1P 32GB-R P244br Base Server</b>	<b>Processor(s)</b>	(1) Intel® Xeon® E5-2640 v3 (2.6GHz/8-core/20MB/8.0GT-s QPI/95W, DDR4-1866, HT, Turbo2)
	<b>Cache Memory</b>	20MB (1x20MB) Level 3 cache
	<b>Memory</b>	32GB (2x 16GB) PC4-2133P-R (DDR4-1866 Registered DIMMs at 1.2V) <b>NOTE: Total of 16 DIMM slots. Only eight (8) usable with single processor.</b>
727028-B21	<b>Network Controller</b>	HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart Array P244br Controller with 1GB FBWC RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives <b>NOTE: NVMe SSDs not available on this model.</b>
	<b>Internal Storage</b>	SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and

## Models

		Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.
<hr/>		
<b>HPE ProLiant BL460c Gen9 E5-2650v3 1P 32GB-R P244br Base Server</b>	<b>Processor(s)</b>	(1) Intel® Xeon® E5-2650 v3 (2.3GHz/10-core/25MB/9.6GT-s QPI/105W, DDR4-2133, HT, Turbo2)
	<b>Cache Memory</b>	25MB (1x25MB) Level 3 cache
	<b>Memory</b>	32GB (2x 16GB) PC4-2133P-R (DDR4-2133 Registered DIMMs at 1.2V) <b>NOTE: Total of 16 DIMM slots. Only eight (8) usable with single processor.</b>
727029-B21	<b>Network Controller</b>	HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart Array P244br Controller with 1GB FBWC RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives <b>NOTE: NVMe SSDs not available on this model.</b>
	<b>Internal Storage</b>	SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.
<hr/>		
<b>HPE ProLiant BL460c Gen9 E5-2660v3 2P 64GB-R P244br Performance Server</b>	<b>Processor(s)</b>	(2) Intel® Xeon® E5-2660 v3 (2.6GHz/10-core/25MB/9.6GT-s QPI/105W, DDR4-2133, HT, Turbo2)
	<b>Cache Memory</b>	25MB (1x25MB) Level 3 cache
	<b>Memory</b>	64GB (4x 16GB) PC4-2133P-R (DDR4-2133 Registered DIMMs at 1.2V) <b>NOTE: Total of 16 DIMM slots.</b>
727030-B21	<b>Network Controller</b>	HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart Array P244br Controller with 1GB FBWC RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives <b>NOTE: NVMe SSDs not available on this model.</b>
	<b>Internal Storage</b>	SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.

## Models

<b>HPE ProLiant BL460c Gen9 E5-2670v3 2P 128GB-L P244br Performance Server</b>  727031-B21	<b>Processor(s)</b>	(2) Intel® Xeon® E5-2670 v3 (2.3GHz/12-core/30MB/9.6GT-s QPI/120W, DDR4-2133, HT, Turbo2)
	<b>Cache Memory</b>	30MB (1x130MB) Level 3 cache
	<b>Memory</b>	128GB (4x 32GB) PC4-2133P-L (DDR4-2133) Load Reduced DIMMs at 1.2V <b>NOTE: Total of 16 DIMM slots.</b>
	<b>Network Controller</b>	HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM
	<b>Storage Controller</b>	Smart Array P244br Controller with 1GB FBWC RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives <b>NOTE: NVMe SSDs not available on this model.</b>
	<b>Internal Storage</b>	SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.84TB; SATA SSD: 3.84TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year3-year Parts, 3-year Labor, 3-year on-site support.

## Smart Buys

<b>HPE ProLiant BL460c Gen9 E5-2690v3 2P 128GB-L P244br/1GB FBWC Server</b>	<b>Processor(s)</b> <b>Cache Memory</b> <b>Memory</b> <b>Network Controller</b> <b>Storage Controller</b> <b>Hard Drive</b>	(2) Intel® Xeon® E5-2690 v3 (2.6GHz/12-core/30MB/130w, DDR4-2133) 30MB (1x30MB) Level 3 cache 128GB (4x 32GB) PC4-2133P-L (DDR4-2133) Load Reduced DIMMs at 1.2V HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM HPE Smart Array P244br Controller with 1GB FBWC RAID 0,1 None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives
779803-S01	<b>Internal Storage</b> <b>Optical Drive Bay</b> <b>Expansion Slots</b>	SAS: 2.4TB; SATA: 2.0TB; SAS SSD: 3.2TB; SATA SSD: 1.6TB None 2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.
<b>HPE ProLiant BL460c Gen9 E5-2680v3 2P 128GB-L P244br/1GB FBWC Server</b>	<b>Processor(s)</b> <b>Cache Memory</b> <b>Memory</b> <b>Network Controller</b> <b>Storage Controller</b> <b>Hard Drive</b>	(2) Intel® Xeon® E5-2680 v3 (2.5GHz/12-core/30MB/120W, DDR4-2133) 30MB (1x30MB) Level 3 cache 128GB (4x 32GB) PC4-2133P-L (DDR4-2133) Load Reduced DIMMs at 1.2V HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM HPE Smart Array P244br Controller with 1GB FBWC RAID 0,1 None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives
779804-S01	<b>Internal Storage</b> <b>Optical Drive Bay</b> <b>Expansion Slots</b>	SAS: 2.4TB; SATA: 2.0TB; SAS SSD: 3.2TB; SATA SSD: 1.6TB None 2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.
<b>HPE ProLiant BL460c Gen9 E5-2640v3 2P 64GB-R H244br Server/ S-Buy</b>	<b>Processor(s)</b> <b>Cache Memory</b> <b>Memory</b> <b>Network Controller</b> <b>Storage Controller</b>	(2) Intel® Xeon® E5-2640 v3 (2.6GHz/8-core/20MB/95w, DDR4-1866) 20MB (1x20MB) Level 3 cache 64GB (4x 16GB) PC4-2133P-R (DDR4-1866) Registered DIMMs at 1.2V HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM HPE Smart HBA H244br Controller with RAID 0,1
779805-S01		

## Smart Buys

	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives
	<b>Internal Storage</b>	SAS: 2.4TB; SATA: 2.0TB; SAS SSD: 3.2TB; SATA SSD: 1.6TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.
<b>HPE ProLiant BL460c Gen9 E5-2620v3 1P 32GB-R H244br Server/S-Buy</b> 779806-S01	<b>Processor(s)</b>	(1) Intel® Xeon® E5-2620 v3 (2.4GHz/6-core/15MB/85W, DDR4-1866)
	<b>Cache Memory</b>	15MB (1x15MB) Level 3 cache
	<b>Memory</b>	32GB (2x 16GB) PC4-2133P-R (DDR4-1866) Registered DIMMs at 1.2V
	<b>Network Controller</b>	HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart HBA H244br Controller with RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives
	<b>Internal Storage</b>	SAS: 2.4TB; SATA: 2.0TB; SAS SSD: 3.2TB; SATA SSD: 1.6TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.
<b>HPE ProLiant BL460c Gen9 E5-2620v3 2P 32GB-R Server/S-Buy</b> 836874-S01	<b>Processor(s)</b>	(1) Intel® Xeon® E5-2620 v3 (2.4GHz/6-core/15MB/85W, DDR4-1866)
	<b>Cache Memory</b>	15MB (1x15MB) Level 3 cache
	<b>Memory</b>	32GB (2x 16GB) PC4-2133P-R (DDR4-1866) Registered DIMMs at 1.2V
	<b>Network Controller</b>	HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart HBA H244br Controller with RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives
	<b>Internal Storage</b>	SAS: 2.4TB; SATA: 2.0TB; SAS SSD: 3.2TB; SATA SSD: 1.6TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control

## Smart Buys

	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.
<b>HPE ProLiant BL460c Gen9 E5-2650v3 2P 64GB-R Server/ S-Buy</b> 836875-S01	<b>Processor(s)</b>	(2) Intel® Xeon® E5-2650 v3 (2.3GHz/10-core/25MB/105w, DDR4-2133)
	<b>Cache Memory</b>	25MB (1x25MB) Level 3 cache
	<b>Memory</b>	64GB (4x 16GB) PC4-2133P-R (DDR4-2133) Registered DIMMs at 1.2V
	<b>Network Controller</b>	HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart HBA H244br Controller with RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives
	<b>Internal Storage</b>	SAS: 2.4TB; SATA: 2.0TB; SAS SSD: 3.2TB; SATA SSD: 1.6TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.
<b>HPE ProLiant BL460c Gen9 E5-2697v3 2P 128GB-L P244br/1GB FBWC Server/S-Buy</b> 836876-S01	<b>Processor(s)</b>	(2) Intel® Xeon® E5-2697 v3 (2.6GHz/14-core/35MB/145W, DDR4-2133)
	<b>Cache Memory</b>	35MB (1x35MB) Level 3 cache
	<b>Memory</b>	128GB (4x 32GB) PC4-2133P-L (DDR4-2133) Load Reduced DIMMs at 1.2V
	<b>Network Controller</b>	HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart Array P244br Controller with 1GB FBWC RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives
	<b>Internal Storage</b>	SAS: 2.4TB; SATA: 2.0TB; SAS SSD: 3.2TB; SATA SSD: 1.6TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.



## Configuration Information - Factory Integrated Models

**NOTE:** This section lists some of the steps required to configure a Factory Integrated Model (configure-to-order or CTO server). To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an Hewlett Packard Enterprise approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

**NOTE:** Configure-to-order server blades must start with a CTO Blade Server.

**NOTE:** FIO indicates that this option is only available as a factory installable option.

**NOTE:** All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.

### Step 1: Base Server Blade Configuration (Select a configurable Blade)

<b>Models</b>	HPE ProLiant BL460c Gen9 E5-v3 10Gb/20Gb FlexibleLOM Configure-to-order Blade Server	727021-B21
	HPE ProLiant BL460c Gen9 E5-v4 10Gb/20Gb FlexibleLOM Configure-to-order Blade Server	813198-B21

#### Configurable Models ship with:

One (1) FlexibleLOM connector providing a choice for one (1) of the supported 10Gb/20Gb FlexibleLOMs (see Step 2)

Two (2) HPE small form factor hot-plug SAS/SATA/ HDD or SSD hard drive bays

Two (2) x16 PCIe I/O expansion slots (one Type A, one Type A/B)

One (1) integrated USB connector and one (1) MicroSDHC connector

One (1) TPM connector

HPE iLO Management (standard)

### Step 2: Choose Required Options (one of the following from each list unless otherwise noted)

**HPE Processors** **NOTE:** All configure-to-order processor kits (i.e. xxxxxx-L21) contain one (1) processor.

**NOTE:** If two processors are desired, select one xxxxxx-L21 here in Step 2 and one xxxxxx-B21 in Step 4.

#### E5-2600 v4 series Processors

HPE BL460c Gen9 Intel® Xeon® E5-2690v4 (2.6GHz/14-core/35MB/135W) FIO Processor Kit	819852-L21
HPE BL460c Gen9 Intel® Xeon® E5-2683v4 (2.1GHz/16-core/40MB/120W) FIO Processor Kit	819851-L21
HPE BL460c Gen9 Intel® Xeon® E5-2680v4 (2.4GHz/14-core/35MB/120W) FIO Processor Kit	819842-L21
HPE BL460c Gen9 Intel® Xeon® E5-2660v4 (2.0GHz/14-core/35MB/105W) FIO Processor Kit	819841-L21
HPE BL460c Gen9 Intel® Xeon® E5-2650v4 (2.2GHz/12-core/30MB/105W) FIO Processor Kit	819840-L21
HPE BL460c Gen9 Intel® Xeon® E5-2650Lv4 (1.7GHz/14-core/35MB/65W) FIO Processor Kit	819849-L21
HPE BL460c Gen9 Intel® Xeon® E5-2640v4 (2.4GHz/10-core/25MB/90W) FIO Processor Kit	819839-L21
HPE BL460c Gen9 Intel® Xeon® E5-2630v4 (2.2GHz/10-core/25MB/85W) FIO Processor Kit	819845-L21
HPE BL460c Gen9 Intel® Xeon® E5-2630Lv4 (1.8GHz/10-core/25MB/55W) FIO Processor	819846-L21

## Configuration Information - Factory Integrated Models

Kit	
HPE BL460c Gen9 Intel® Xeon® E5-2623v4 (2.6GHz/4-core/10MB/85W) FIO Processor Kit	819844-L21
HPE BL460c Gen9 Intel® Xeon® E5-2620v4 (2.1GHz/8-core/20MB/85W) FIO Processor Kit	819838-L21
HPE BL460c Gen9 Intel® Xeon® E5-2609v4 (1.7GHz/8-core/20MB/85W) FIO Processor Kit	819837-L21
HPE BL460c Gen9 Intel® Xeon® E5-2603v4 (1.7GHz/6-core/15MB/85W) FIO Processor Kit	819843-L21
HPE BL460c Gen9 Intel® Xeon® E5-2699v4 (2.2GHz/22-core/55MB/145W) FIO Processor Kit	819856-L21
HPE BL460c Gen9 Intel® Xeon® E5-2698v4 (2.2GHz/20-core/50MB/135W) FIO Processor Kit	819855-L21
HPE BL460c Gen9 Intel® Xeon® E5-2697v4 (2.3GHz/18-core/45MB/145W) FIO Processor Kit	819854-L21
HPE BL460c Gen9 Intel® Xeon® E5-2697Av4 (2.6GHz/16-core/40MB/145W) FIO Processor Kit	819857-L21
HPE BL460c Gen9 Intel® Xeon® E5-2695v4 (2.1GHz/18-core/45MB/120W) FIO Processor Kit	819853-L21
HPE BL460c Gen9 Intel® Xeon® E5-2667v4 (3.2GHz/8-core/25MB/135W) FIO Processor Kit	819850-L21
HPE BL460c Gen9 Intel® Xeon® E5-2643v4 (3.4GHz/6-core/20MB/135W) FIO Processor Kit	819848-L21
HPE BL460c Gen9 Intel® Xeon® E5-2637v4 (3.5GHz/4-core/15MB/135W) FIO Processor Kit	819847-L21

### E5-2600 v3 series Processors

HP BL460c Gen9 Intel® Xeon® E5-2690v3 (2.6GHz/12-core/30MB/135W) FIO Processor Kit	726987-L21
HP BL460c Gen9 Intel® Xeon® E5-2680v3 (2.5GHz/12-core/30MB/120W) FIO Processor Kit	726988-L21
HP BL460c Gen9 Intel® Xeon® E5-2670v3 (2.3GHz/12-core/30MB/120W) FIO Processor Kit	726989-L21
HP BL460c Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) FIO Processor Kit	726990-L21
HP BL460c Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W) FIO Processor Kit	726991-L21
HPE BL460c Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) FIO Processor Kit	726992-L21
HP BL460c Gen9 Intel® Xeon® E5-2683v3 (2GHz/14-core/35MB/120W) FIO Processor Kit	726993-L21
HP BL460c Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) FIO Processor Kit	726994-L21
HP BL460c Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) FIO Processor Kit	726995-L21
HP BL460c Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W) FIO Processor Kit	726996-L21
HP BL460c Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) FIO Processor Kit	726997-L21
HP BL460c Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) FIO Processor Kit	726999-L21
HP BL460c Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) FIO Processor Kit	727000-L21
HP BL460c Gen9 Intel® Xeon® E5-2698v3 (2.3GHz/16-core/40MB/135W) FIO Processor Kit	727001-L21
HP BL460c Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) FIO Processor Kit	727002-L21
HP BL460c Gen9 Intel® Xeon® E5-2695v3 (2.3GHz/14-core/35MB/120W) FIO Processor Kit	727003-L21
HP BL460c Gen9 Intel® Xeon® E5-2637v3 (3.5GHz/4-core/15MB/135W) FIO Processor Kit	765268-L21

## Configuration Information - Factory Integrated Models

HP BL460c Gen9 Intel® Xeon® E5-2697v3 (2.6GHz/14-core/35MB/145W) FIO Processor Kit	767049-L21
HP BL460c Gen9 Intel® Xeon® E5-2667v3 (3.2GHz/8-core/20MB/135W) FIO Processor Kit	773123-L21
HP BL460c Gen9 Intel® Xeon® E5-2643v3 (3.4GHz/6-core/20MB/135W) FIO Processor Kit	773124-L21
HP BL460c Gen9 Intel® Xeon® E5-2699v3 (2.3GHz/18-core/45MB/145W) FIO Processor Kit	779795-L21

**NOTE:** All processors within the server must be identical.

**NOTE:** DIMM slots 4 and 5 are not accessible when the E5-2699 v4, E5-2697 v4, E5-2697A v4, E5-2667 v4, E5-2643 v4, E5-2637 v4, E5-2699 v3, the E5-2697 v3, the E5-2643 v3, the E5-2637 v3, or the E5-2667 v3 is used. In a 2 processor configuration, there are twelve (12) total available DIMM slots.

**NOTE:** For the maximum supported memory speeds for each processor listed above, please reference the 'Memory Speed by Processor Model' table in the Memory section of the QuickSpecs.

**NOTE:** All processors support Intel® Hyper-Threading and Intel® Turbo Boost Technologies except the E5-2609 v4, E5-2603 v4, E5-2603 v3 and E5-2609 v3.

**NOTE:** DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

**NOTE:** Supports 1 or 2 processors. Mixing different processor models is not supported.

**NOTE:** For the Intel® C610 Chipset E5-2600 v3 and v4 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, and x = L for low power SKUs.

**NOTE:** The BL460c Gen9 includes two I/O mezzanine expansion slots. A processor must be installed in processor slot 1 for access to the first mezzanine expansion slot (expansion slot 1). A processor must be installed in processor slot 2 for access to the second mezzanine expansion slot (expansion slot 2).

**NOTE:** The letter "L" following the model number indicates denotes lower wattage.

### HPE Memory

**NOTE:** HPE memory from previous generation servers (DDR3) is not compatible with this server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the HPE SmartMemory QuickSpecs at:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111535>

**NOTE:** LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

**NOTE:** Depending on the memory configuration and processor model, the memory speed may run at 2400MT/s, 2133MT/s, 1866MT/s, or 1600MT/s. Please see **Memory**

**Population Table** or the Online Memory Configuration Tool at:

<https://h22195.www2.hpe.com/DDR4memoryconfig/Home/LEGAL>

### HPE SmartMemory

#### Registered DIMMs (RDIMMs) - E5-2600 v4 series Processors

HP 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805347-B21
HP 16GB (1x16GB) Single Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805349-B21
HPE 16GB (1x16GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	836220-B21
HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805351-B21

#### Load Reduced DIMMs (LRDIMMs) - E5-2600 v4 series Processors

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit	805353-B21
HPE 64GB (1x64GB) Quad Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit	805358-B21

## Configuration Information - Factory Integrated Models

HPE 128GB (1x128GB) Octal Rank x4 DDR4-2400 CAS-20-18-18 Load Reduced Memory Kit 809208-B21

### Registered DIMMs (RDIMMs) - E5-2600 v3 series Processors

HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit 759934-B21

HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit 726718-B21

HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit 726719-B21

HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit 728629-B21

### Load Reduced DIMMs (LRDIMMs) - E5-2600 v3 series Processors

HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit 726722-B21

HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit 726720-B21

HP 48GB (1x16GB + 1x32GB) DDR4-2133 CAS-15-15-15 Load Reduced Memory FIO Kit 792278-B21

HP 64GB (1x64GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit 726724-B21

**NOTE:** For more information on ProLiant Energy Efficient Features, see:

<http://h18000.www1.hp.com/products/servers/platforms/energyefficient/bridge.html>

## HPE Networking

### FlexibleLOM Adapters

**NOTE:** The server requires one (1) FlexibleLOM that is installed in the FlexibleLOM connectors. All FlexibleLOMs are dual port: One port is routed to interconnect module bay 1 and the other to bay 2.

### 20Gb FlexibleLOM Adapters

HPE FlexFabric 20Gb 2-port 630FLB FIO Adapter 700066-B21

HPE FlexFabric 20Gb 2-port 650FLB FIO Adapter 700764-B21

### 10Gb FlexibleLOM Adapters

HPE FlexFabric 10Gb 2-port 536FLB FIO Adapter 766491-B21

HPE Ethernet 10Gb 2-port 560FLB FIO Adapter 684214-B21

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

<http://www.hp.com/go/ProLiantNICs>

## Step 3: Choose Additional Factory Integration Options

### HPE Insight Software

HPE Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO LTU C6N36A

HPE Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle FIO E-LTU C6N36ABE

### Converged Infrastructure Management Software

#### HPE OneView with iLO Advanced - Server hardware required on same purchase order

HPE OneView for Blade Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU F6Q89A

#### HPE OneView without iLO Advanced

HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU P8B31A

### HPE Storage Controllers

HP Smart Array P244br/1GB FBWC 12Gb 2-ports Int FIO SAS Controller 761871-B21

HP Smart Array P246br/1GB FBWC 12Gb 4-ports Int FIO SAS Controller 749975-B21

HPE Smart Array P741m/2GB FBWC 12Gb 4-ports Ext Mezzanine SAS Controller 726782-B21

## Configuration Information - Factory Integrated Models

HP H244br 12Gb 2-ports Int FIO Smart Host Bus Adapter	761878-B21
HP FIO Enable Smart Array B140i Setting	784308-B21
HPE BL460c G9 Broadwell NVMe FIO Setting	825555-B21

**NOTE:** The HPE Gen9 Broadwell NVMe FIO Setting (825555-B21) is required to support SFF NVMe SSDs within the system. This option is not compatible with the HPE Smart Array P244br, HPE Smart Array P246br, or HPE Smart HBA H244br. HPE recommends the use of a dual M.2 solid state drive kit for boot when using this option.

**NOTE:** The HPE Smart Array B140i Controller (chipset SATA) comes standard with the HPE BL460c Gen9 10Gb/20Gb FLB CTO Blade (727021-B21). If neither the HPE Smart Array P244br nor the HPE H244br controllers are chosen, a SATA cable will be provided to support SATA devices for the two internal drives. If RAID is required when using the B140i, please choose 'HPE FIO B140i RAID Enable Kit - BIOS Setting' (784308-B21).

---

## Step 4: Choose Additional Options for Factory Integration

**NOTE:** For additional options, please refer to the "Core Options" and "Additional Options" section below. For additional options, including server blade enclosures interconnect, mezzanine options and power subsystem options; please see the Core Options and Additional sections below; or the following:

- HPE BladeSystem c3000 Enclosure QuickSpecs:  
<https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128340.pdf>  
**NOTE:** The c3000 HPE c-Class enclosures have full backwards and forwards compatibility, existing server blades are supported in the new enclosures and any future server blades will be supported in the existing enclosures.
- HPE BladeSystem c7000 Enclosure QuickSpecs:  
<https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128339.pdf>  
**NOTE:** The c7000 HPE c-Class enclosures have full backwards and forwards compatibility, existing server blades are supported in the new enclosures and any future server blades will be supported in the existing enclosures.
- HPE BladeSystem c-Class Interconnect and Mezzanine Components:  
<http://h18004.www1.hp.com/products/blades/components/c-class-interconnects.html> and  
<http://h18004.www1.hp.com/products/blades/components/c-class-adapters.html>

**NOTE:** For optimal cooling and system performance the BL460c Gen9 Server Blade requires the c7000 enclosure to be configured with 10 fans and the c3000 enclosure to be configured with 6 fans.

## Core Options

### HPE Networking

**NOTE:** A 10 Gigabit Ethernet adapter supports linking at 1Gbps or 10Gbps when connected to an interconnect module with 10Gb Ethernet downlinks.

**NOTE:** A 10 Gigabit Ethernet adapter supports linking at only 1Gbps when connected to an interconnect module with 1Gb Ethernet downlinks.

**NOTE:** The 10 Gigabit Ethernet adapters on each server blade connect to a 10Gb interconnect in bays 3-6 (HPE BladeSystem c7000 Enclosure) or bays 2-4 (HPE BladeSystem c3000 Enclosure).

#### 20 Gigabit Ethernet Mezzanine Cards

HPE FlexFabric 20Gb 2-port 630M Adapter 700076-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04312720>

HPE FlexFabric 20Gb 2-port 650M Adapter 700767-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04347342>

#### 10 Gigabit Ethernet Mezzanine Cards

HPE FlexFabric 10Gb 2-port 534M Adapter 700748-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at: <http://www8.hp.com/us/en/products/iss-adapters/product-detail.html?oid=5404540>

HPE Ethernet 10Gb 2-port 560M Adapter 665246-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at: <https://www.hpe.com/h20195/v2/GetPDF.aspx/c04111406.pdf>

#### 1 Gigabit Ethernet Mezzanine Cards

HPE Ethernet 1Gb 4-port 366M Adapter 615729-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at: <https://www.hpe.com/h20195/v2/getpdf.aspx/c04111456.pdf?ver=10>

#### FlexibleLOM Adapters

**NOTE:** The server supports one (1) FlexibleLOM that is installed in the FlexibleLOM connectors and is already included in the pre-configured models. However, it must be added in Step 2 for Configure-to-Order Models. The FlexibleLOM options below are used to change these original FlexibleLOMs.

#### 20Gb FlexibleLOM Adapters

HPE FlexFabric 20Gb 2-port 630FLB Adapter 700065-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04312719>

HPE FlexFabric 20Gb 2-port 650FLB Adapter 700763-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04347341>

#### 10Gb FlexibleLOM Adapters

HPE FlexFabric 10Gb 2-port 536FLB Adapter 766490-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04347246>

HPE Ethernet 10Gb 2-port 560FLB Adapter 655639-B21

## Core Options

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetPDF.aspx/c04111516.pdf>

### HPE InfiniBand Mezzanine Adapters

**NOTE:** When an InfiniBand adapter is installed in mezzanine slot 1, only one port is active (regardless of operating mode). When installed in mezzanine slot 2, both ports are active.

**NOTE:** InfiniBand QDR and FDR speeds are only supported on the HPE BladeSystem c7000 Enclosure. For additional information, please see the HPE BladeSystem c7000 Enclosure and InfiniBand QuickSpecs at:

<https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128339.pdf>

<https://www.hpe.com/h20195/v2/getpdf.aspx/c04126044.pdf?ver=26>

HPE InfiniBand QDR/Ethernet 10Gb 2-port 544+M Adapter 764282-B21

**NOTE:** The QDR InfiniBand adapter may be installed in either mezzanine slot of the server.

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+M Adapter 764283-B21

**NOTE:** The FDR InfiniBand adapter must be installed in mezzanine slot 1 for FDR mode and may be installed in either mezzanine slot if operated in any other mode.

HP InfiniBand FDR 2-port 545M Adapter 702213-B21

**HPE Fibre Channel** HPE LPe1605 16Gb Fibre Channel HBA for BladeSystem c-Class 718203-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/getpdf.aspx/c04315132.pdf?ver=2>

HPE QMH2672 16Gb Fibre Channel Host Bus Adapter 710608-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04126962>

### HPE Processors E5-2600 v4 series Processors

HPE BL460c Gen9 Intel® Xeon® E5-2690v4 (2.6GHz/14-core/35MB/135W) Processor Kit 819852-B21

HPE BL460c Gen9 Intel® Xeon® E5-2683v4 (2.1GHz/16-core/40MB/120W) Processor Kit 819851-B21

HPE BL460c Gen9 Intel® Xeon® E5-2680v4 (2.4GHz/14-core/35MB/120W) Processor Kit 819842-B21

HPE BL460c Gen9 Intel® Xeon® E5-2660v4 (2.0GHz/14-core/35MB/105W) Processor Kit 819841-B21

HPE BL460c Gen9 Intel® Xeon® E5-2650v4 (2.2GHz/12-core/30MB/105W) Processor Kit 819840-B21

HPE BL460c Gen9 Intel® Xeon® E5-2650Lv4 (1.7GHz/14-core/35MB/65W) Processor Kit 819849-B21

HPE BL460c Gen9 Intel® Xeon® E5-2640v4 (2.4GHz/10-core/25MB/90W) Processor Kit 819839-B21

HPE BL460c Gen9 Intel® Xeon® E5-2630v4 (2.2GHz/10-core/25MB/85W) Processor Kit 819845-B21

HPE BL460c Gen9 Intel® Xeon® E5-2630Lv4 (1.8GHz/10-core/25MB/55W) Processor Kit 819846-B21

HPE BL460c Gen9 Intel® Xeon® E5-2623v4 (2.6GHz/4-core/10MB/85W) Processor Kit 819844-B21

HPE BL460c Gen9 Intel® Xeon® E5-2620v4 (2.1GHz/8-core/20MB/85W) Processor Kit 819838-B21

HPE BL460c Gen9 Intel® Xeon® E5-2609v4 (1.7GHz/8-core/20MB/85W) Processor Kit 819837-B21

HPE BL460c Gen9 Intel® Xeon® E5-2603v4 (1.7GHz/6-core/15MB/85W) Processor Kit 819843-B21

HPE BL460c Gen9 Intel® Xeon® E5-2699v4 (2.2GHz/22-core/55MB/145W) Processor Kit 819856-B21

HPE BL460c Gen9 Intel® Xeon® E5-2698v4 (2.2GHz/20-core/50MB/135W) Processor Kit 819855-B21

HPE BL460c Gen9 Intel® Xeon® E5-2697v4 (2.3GHz/18-core/45MB/145W) Processor Kit 819854-B21

HPE BL460c Gen9 Intel® Xeon® E5-2697Av4 (2.6GHz/16-core/40MB/145W) Processor Kit 819857-B21

HPE BL460c Gen9 Intel® Xeon® E5-2695v4 (2.1GHz/18-core/45MB/120W) Processor Kit 819853-B21

## Core Options

HPE BL460c Gen9 Intel® Xeon® E5-2667v4 (3.2GHz/8-core/25MB/135W) Processor Kit	819850-B21
HPE BL460c Gen9 Intel® Xeon® E5-2643v4 (3.4GHz/6-core/20MB/135W) Processor Kit	819848-B21
HPE BL460c Gen9 Intel® Xeon® E5-2637v4 (3.5GHz/4-core/15MB/135W) Processor Kit	819847-B21

### E5-2600 v3 series Processors

HPE BL460c Gen9 Intel® Xeon® E5-2690v3 (2.6GHz/12-core/30MB/135W) Processor Kit	726987-B21
HPE BL460c Gen9 Intel® Xeon® E5-2680v3 (2.5GHz/12-core/30MB/120W) Processor Kit	726988-B21
HPE BL460c Gen9 Intel® Xeon® E5-2670v3 (2.3GHz/12-core/30MB/120W) Processor Kit	726989-B21
HPE BL460c Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) Processor Kit	726990-B21
HPE BL460c Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W) Processor Kit	726991-B21
HPE BL460c Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) Processor Kit	726992-B21
HPE BL460c Gen9 Intel® Xeon® E5-2683v3 (2GHz/14-core/35MB/120W) Processor Kit	726993-B21
HPE BL460c Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) Processor Kit	726994-B21
HPE BL460c Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) Processor Kit	726995-B21
HPE BL460c Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W) Processor Kit	726996-B21
HPE BL460c Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) Processor Kit	726997-B21
HPE BL460c Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) Processor Kit	726999-B21
HPE BL460c Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) Processor Kit	727000-B21
HPE BL460c Gen9 Intel® Xeon® E5-2698v3 (2.3GHz/16-core/40MB/135W) Processor Kit	727001-B21
HPE BL460c Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) Processor Kit	727002-B21
HPE BL460c Gen9 Intel® Xeon® E5-2695v3 (2.3GHz/14-core/35MB/120W) Processor Kit	727003-B21
HPE BL460c Gen9 Intel® Xeon® E5-2637v3 (3.5GHz/4-core/15MB/135W) Processor Kit	765268-B21
HPE BL460c Gen9 Intel® Xeon® E5-2697v3 (2.6GHz/14-core/35MB/145W) Processor Kit	767049-B21
HPE BL460c Gen9 Intel® Xeon® E5-2667v3 (3.2GHz/8-core/20MB/135W) Processor Kit	773123-B21
HPE BL460c Gen9 Intel® Xeon® E5-2643v3 (3.4GHz/6-core/20MB/135W) Processor Kit	773124-B21
HPE BL460c Gen9 Intel® Xeon® E5-2699v3 (2.3GHz/18-core/45MB/145W) Processor Kit	779795-B21

**NOTE:** All processors within the server must be identical.

**NOTE:** DIMM slots 4 and 5 are not accessible when the E5-2699 v4, E5-2697 v4, E5-2697A v4, E5-2667 v4, E5-2643 v4, E5-2637 v4, E5-2699 v3, the E5-2697 v3, the E5-2643 v3, the E5-2637 v3, or the E5-2667 v3 is used. In a 2 processor configuration, there are twelve (12) total available DIMM slots.

**NOTE:** For the maximum supported memory speeds for each processor listed above, please reference the 'Memory Speed by Processor Model' table in the Memory section of the QuickSpecs.

**NOTE:** All processors support Intel® Hyper-Threading and Intel® Turbo Boost Technologies except the E5-2609 v4, E5-2603 v4, E5-2603 v3 and E5-2609 v3.

**NOTE:** DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

**NOTE:** Supports 1 or 2 processors. Mixing different processor models is not supported.

**NOTE:** For the Intel® C610 Chipset E5-2600 v3 and v4 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, and x = L for low power SKUs.

**NOTE:** The BL460c Gen9 includes two I/O mezzanine expansion slots. A processor must be installed in processor slot 1 for access to the first mezzanine expansion slot (expansion slot 1). A processor must be installed in processor slot 2 for access to the second mezzanine expansion slot (expansion slot 2).

**NOTE:** The letter "L" following the model number indicates denotes lower wattage.



## Core Options

### HPE Memory

**NOTE:** HPE memory from previous generation servers (DDR3) is not compatible with this server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the HPE SmartMemory QuickSpecs at:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111535>

**NOTE:** LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

**NOTE:** Depending on the memory configuration and processor model, the memory speed may run at 2400MT/s, 2133MT/s, 1866MT/s, or 1600MT/s. Please see [Memory](#)

[Population Table](#) or the [Online Memory Configuration Tool](#) at:

<https://h22195.www2.hpe.com/DDR4memoryconfig/Home/LEGAL>

#### HPE SmartMemory

##### Registered DIMMs (RDIMMs) - E5-2600 v4 series Processors

HP 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805347-B21
HP 16GB (1x16GB) Single Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805349-B21
HPE 16GB (1x16GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	836220-B21
HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805351-B21

##### Load Reduced DIMMs (LRDIMMs) - E5-2600 v4 series Processors

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit	805353-B21
HPE 64GB (1x64GB) Quad Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit	805358-B21
HPE 128GB (1x128GB) Octal Rank x4 DDR4-2400 CAS-20-18-18 Load Reduced Memory Kit	809208-B21

##### Registered DIMMs (RDIMMs) - E5-2600 v3 series Processors

HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit	759934-B21
HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726718-B21
HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726719-B21
HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	728629-B21

##### Load Reduced DIMMs (LRDIMMs) - E5-2600 v3 series Processors

HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726722-B21
HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726720-B21
HP 48GB (1x16GB + 1x32GB) DDR4-2133 CAS-15-15-15 Load Reduced Memory FIO Kit	792278-B21
HP 64GB (1x64GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726724-B21

### HPE Solid State M.2 SATA Drives

**NOTE:** The solid state M.2 SATA drives plug directly into a connector on the system board and do not use a SFF drive cage slot.

**NOTE:** RAID 1, 0 are provided through the B140i in UEFI BIOS mode only.

HP 64GB Value Endurance Solid State M.2 Enablement Kit for ProLiant Blades	785233-B21
HPE 64GB SATA Read Intensive 2242 3yr Wty Dual M.2 Kit	775588-B21
HPE 120GB SATA Read Intensive 3yr Wty M.2 Kit for Blades	846495-B21
HPE 120GB SATA Read Intensive 3yr Wty Dual M.2 Kit for Blades	846497-B21

### HPE Hard Drives

**NOTE:** The ProLiant BL460c Gen9 server includes the HPE hot-plug small form factor (SFF) SmartDrive carrier for enhanced management and reduced maintenance errors.

## Core Options

HPE drives from generation G7 servers and before are not compatible with the BL460c Gen9 drive bays.

**NOTE:** The mixing of standard SAS drives with SAS SSD is supported within the server, but limits the RAID configuration to two separate RAID 0 volumes. Mixing of other drives types is not supported.

**NOTE:** HPE hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

### HPE NVMe PCIe Read Intensive SFF (2.5-inch) Solid State Drives

HPE 2TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty SSD	764908-B21
HPE 1.2TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty SSD	764906-B21
HPE 400GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty SSD	764904-B21

### HPE NVMe PCIe Mixed Use SFF (2.5-inch) Solid State Drives

HPE 2TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty SSD	765044-B21
HPE 1.6TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty SSD	765038-B21
HPE 800GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty SSD	765036-B21
HPE 400GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty SSD	765034-B21

### HPE NVMe PCIe Write Intensive SFF (2.5-inch) Solid State Drives

HPE 1.6TB NVMe x4 Lanes Write Intensive SFF (2.5in) SCN 3yr Wty SSD	764892-B21
HPE 800GB NVMe x4 Lanes Write Intensive SFF (2.5in) SCN 3yr Wty SSD	736939-B21
HPE 400GB NVMe x4 Lanes Write Intensive SFF (2.5in) SCN 3yr Wty SSD	736936-B21

**NOTE:** The HPE Gen9 Broadwell NVMe FIO Setting (825555-B21) is required to support SFF NVMe SSDs within the system. This option is not compatible with the HPE Smart Array P244br, HPE Smart Array P246br, or HPE Smart HBA H244br. Hewlett Packard Enterprise recommends the use of a dual M.2 solid state drive kit for boot when using this option.

**NOTE:** Hewlett Packard Enterprise has qualified the NVMe drive portfolio using the Operating System inbox drivers, full detail on the Solid State Drive QuickSpecs:

<https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04154378>

### 6G SATA Hot Plug with SmartDrive SFF (2.5-inch) Midline (MDL) Drives

HPE 3.84TB SATA 6G RI SFF SC DS SSD	868830-B21
HPE 1.92TB SATA 6G RI SFF SC DS SSD	868826-B21
HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	871770-B21
HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty HDD	655710-B21
HPE 960GB SATA 6G RI SFF SC DS SSD	868822-B21
HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	871768-B21
HPE 480GB SATA 6G RI SFF SC DS SSD	868818-B21
HPE 480GB SATA 6G RI SFF SC SSD	872855-B21
HPE 240GB SATA 6G RI SFF SC DS SSD	868814-B21
HPE 240GB SATA 6G RI SFF SC SS	872853-B21
HPE 400GB SATA 6G WI SFF SC DS SSD	872355-B21
HPE 800GB SATA 6G WI SFF SC DS SSD	872359-B21
HPE 1.6TB SATA 6G WI SFF SC DS SSD	872363-B21

### 12G SAS (2.5-inch) 512e SC HDD

## Core Options

HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e HDD	748387-B21
HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765464-B21
HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e HDD	791034-B21
HPE 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765466-B21
<b>12G SAS (2.5-inch) SFF MDL SC HDD</b>	
HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty HDD	832514-B21
<b>SAS Hot Plug with SmartDrive SFF (2.5-inch) Enterprise Drives</b>	
HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652572-B21
HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652605-B21
<b>SAS Hot Plug SmartDrive SFF (2.5-inch) Midline Drives</b>	
HPE 1TB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	652749-B21
<b>6G SATA (2.5-inch) 512e SC HDD</b>	
HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765453-B21
HPE 2TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765455-B21
<b>12G SAS Write Intensive SFF (2.5-inch) SC Solid State Drive</b>	
HPE 200GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD	802578-B21
HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD	802582-B21
HPE 800GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD	802586-B21
HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty SSD	802891-B21
HPE 800GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD	846430-B21
HPE 1.6TB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD	846432-B21
<b>12G SAS Mixed Use SFF (2.5-inch) SC Solid State Drive</b>	
HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty SSD	846434-B21
HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty SSD	846436-B21
<b>12G SAS SFF (2.5-inch) SC 3yr Wty H2 Drive</b>	
HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	872481-B21
HP 1.2TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	781518-B21
HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872479-B21
HP 900GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	785069-B21
HP 600GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	781516-B21
HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872477-B21
HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty HDD	785067-B21
HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872475-B21
<b>6G SATA Value Endurance SFF (2.5-inch) SC Enterprise Value M1 Solid State Drives</b>	
HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764923-B21

## Core Options

HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764925-B21
HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764927-B21
HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764929-B21

### 6G SATA 2.5in WI-PLP SC SSD

HPE 1.2TB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty SSD	804677-B21
HPE 800GB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty SSD	804671-B21
HPE 400GB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty SSD	804665-B21
HPE 200GB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty SSD	804639-B21

### 6G SATA 2.5in MU-PLP SC SSD

HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872352-B21
HPE 1.6TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD	804631-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872348-B21
HPE 800GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD	804625-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD	832414-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872344-B21
HPE 200GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD	804613-B21

### 6G SATA 2.5in RI-PLP SC SSD

HPE 1.6TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD	804605-B21
HPE 1.6TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869386-B21
HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869384-B21
HPE 800GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD	804599-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD	804593-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869378-B21
HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD	804587-B21
HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869376-B21
HPE 150GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869374-B21
HPE 120GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD	804581-B21
HPE 80GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD	804575-B21

### 12G SAS ME SFF (2.5-inch) SC Enterprise Mainstream H2 Solid State Drives

HPE 1.6TB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD	779176-B21
HPE 200GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD	779164-B21
HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD	779168-B21
HPE 800GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD	779172-B21

### 12G SAS VE SFF (2.5-inch) SC EV Solid State Drives

HP 1.6TB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	762263-B21
HPE 800GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty SSD	762261-B21

## Core Options

### 6G SATA Hot Plug RI SFF (2.5-inch) SC Solid State Drives

HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD	816929-B21
HPE 120GB 6G SATA Read Intensive-1 SFF 2.5-in SC 3yr Wty Solid State Drive	838404-B21
HPE 240GB 6G SATA Read Intensive-1 SFF 2.5-in SC 3yr Wty Solid State Drive	838406-B21
HPE 480GB 6G SATA Read Intensive-1 SFF 2.5-in SC 3yr Wty Solid State Drive	838408-B21
HPE 960GB 6G SATA Read Intensive-1 SFF 2.5-in SC 3yr Wty Solid State Drive	838410-B21
HPE 1.92TB 6G SATA Read Intensive-1 SFF 2.5-in SC 3yr Wty Solid State Drive	838412-B21

### SAS Hot Plug with SmartDrive SFF (2.5-inch) Enterprise Drives

HP 300GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759208-B21
HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870753-B21
HP 450GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759210-B21
HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759212-B21
HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870757-B21
HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	870763-B21
HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870759-B21
HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	870765-B21

**NOTE:** The mixing of standard SAS drives with SAS SSD is supported within the server, but limits the RAID configuration to two separate RAID 0 volumes. Mixing of other drives types is not supported

## Additional Options

### HPE Insight software

#### HPE Insight Control

HPE Insight Control including 1yr 24x7 Technical Support and Updates 1-server LTU

C6N27A

HPE Insight Control including 1yr 24x7 TSU E-LTU

C6N28ABE

HPE Insight Management Media Kit

C6N31A

**NOTE:** HPE Insight Management Media Kit contains DVDs without licenses. Contains HPE Systems Insight Manager, HPE Insight Control, HPE Matrix Operating Environment, and Virtual Connect Enterprise Manager software. Uses an integrated installer to perform quick and accurate software installation and updates.

**NOTE:** Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

**NOTE:** Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HPE Software Technical Support Service.

**NOTE:** Licenses ship without media. The HPE Insight Management Media Kit can be ordered separately, or can be downloaded at

<https://h20392.www2.hpe.com/portal/swdepot/displayProductInfo.do?productNumber=IMDVD>

**NOTE:** For additional license kits, please see the QuickSpecs at:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04123391>

### HPE iLO Advanced License

#### HPE Integrated Lights-Out (iLO) Advanced for ProLiant BladeSystem Remote Management

HPE iLO Advanced for BladeSystem including 3yr 24x7 Technical Support and Updates E-LTU

E6U63ABE

HPE iLO Advanced for BladeSystem including 3yr 24x7 Tech Support and Updates 1-server LTU

BD502A

HPE iLO Advanced for BladeSystem including 1yr 24x7 Technical Support and Updates E-LTU

E6U60ABE

HPE iLO Advanced for BladeSystem including 1yr 24x7 Support 1-server LTU

512488-B21

**NOTE:** Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one or three years of 24 x 7 HPE Software Technical Support Service.

**NOTE:** For additional license kits, including electronic delivery options, please see the iLO QuickSpecs at <https://www.hpe.com/us/en/servers/integrated-lights-out-ilo.html>

**NOTE:** Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one or three year of 24 x 7 HPE Software Technical Support Service.

**NOTE:** For additional license kits, please see the QuickSpecs at:

<http://h20564.www2.hpe.com/hpsc/doc/public/display?docId=c04951959>

### Converged Infrastructure Management Software

#### HPE OneView

##### HPE OneView with iLO Advanced

HPE OneView including 3yr 24x7 Support Physical 1-server LTU

E5Y34A

HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU

E5Y35AAE

HPE OneView Physical Media Kit LTU

E5Y37A

HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU

P8B24A

## Additional Options

	HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE
	<b>NOTE:</b> For additional license kits please see the QuickSpecs at <a href="http://h20564.www2.hp.com/hpsc/doc/public/display?docId=c04951959">http://h20564.www2.hp.com/hpsc/doc/public/display?docId=c04951959</a>	
<b>High Performance Clusters</b>	<b>HPE Cluster Management Utility</b>	
	HPE Insight Cluster Management Utility 1yr 24x7 Flexible LTU	QL803B
	HPE Insight Cluster Management Utility 3yr 24x7 Flexible LTU	BD476A
	<b>NOTE:</b> These part numbers can be used to purchase one certificate for multiple licenses and support with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key. Customer also will receive a support agreement.	
	HPE Insight Cluster Management Utility Media	BD477A
	<b>NOTE:</b> For additional license kits please see the QuickSpecs at <a href="http://www8.hp.com/us/en/products/server-software/product-detail.html?oid=3296361">http://www8.hp.com/us/en/products/server-software/product-detail.html?oid=3296361</a>	
<b>HPE I/O Accelerator Options</b>	<b>NOTE:</b> HPE I/O Accelerator cards can be used in legacy BIOS mode only.	
	HPE 1.2TB Read Intensive Mezzanine PCIe Workload Accelerator for BladeSystem c-Class	794603-B21
	HPE 1.6TB Read Intensive Mezzanine PCIe Workload Accelerator for BladeSystem c-Class	794605-B21
<b>HPE Security</b>	HPE Trusted Platform Module Option	488069-B21
	HPE Trusted Platform Module 2.0 Kit	745823-B21
	<b>NOTE:</b> The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008 R2 and 2012. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 R2 and 2012 has not been tampered with while the system was offline.	
	<b>NOTE:</b> For more information about TPM, including a white paper, go to <a href="https://www.hp.com/h20195/v2/getpdf.aspx/4AA5-4782ENW.pdf">https://www.hp.com/h20195/v2/getpdf.aspx/4AA5-4782ENW.pdf</a>	
	<b>NOTE:</b> ProLiant OS pre-installed units will come with the partition required for TPM deployment.	
	<b>NOTE:</b> The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.	
<b>HPE Storage Controllers</b>	HPE Smart Array P244br/1GB FBWC 12Gb 2-ports Int SAS Controller	749680-B21
	HPE H244br 12Gb 2-ports Int Smart Host Bus Adapter	726809-B21
	HPE Smart Array P246br/1GB FBWC 12Gb 4-ports Int SAS Controller	726793-B21
	<b>NOTE:</b> The HPE Smart Array P246br controller is only required when using a PCI expansion blade or D2220sb storage blade with the BL460c Gen9.	
<b>HPE Secure Encryption</b>	HP Secure Encryption per Svr Entitlement	C9A82AAE
	<b>NOTE:</b> HPE Secure Encryption is supported on the HPE Smart Array P244br and H244br (running in RAID mode) as an option. HPE Secure Encryption licensing is based on the number of physical drives requiring encryption.	

## Additional Options

**NOTE:** For more information about HPE Secure Encryption, go to <http://www8.hp.com/us/en/products/server-software/product-detail.html?oid=6532260>

### HPE InfiniBand Mezzanine Adapters

**NOTE:** When an InfiniBand adapter is installed in mezzanine slot 1, only one port is active (regardless of operating mode). When installed in any other mezzanine slot, both ports are active.

**NOTE:** InfiniBand QDR and FDR speeds are only supported on the HPE BladeSystem c7000 Enclosure. For additional information, please see the HPE BladeSystem c7000 Enclosure and InfiniBand QuickSpecs at:

<https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128339.pdf>

<https://www.hpe.com/h20195/v2/getpdf.aspx/c04126044.pdf?ver=26>

HPE InfiniBand QDR/Ethernet 10Gb 2-port 544+M Adapter

764282-B21

**NOTE:** The QDR InfiniBand adapter may be installed in any mezzanine slot of the server.

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+M Adapter

764283-B21

**NOTE:** The FDR InfiniBand adapter must be installed in mezzanine slot 1 for FDR mode and may be installed in any mezzanine slot if operated in any other mode.

HP InfiniBand FDR 2-port 545M Adapter

702213-B21

### HPE Flash Media Kits for USB Drives

#### HPE Flash Media Kits for USB Drives

#### HPE Enterprise Mainstream Flash Media Kits for Memory Cards

HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit

737953-B21

HPE 8GB microSD Enterprise Mainstream Flash Media Kit

726116-B21

HPE 32GB microSD Mainstream Flash Media Kit

700139-B21

HP Dual 8GB microSD Enterprise Midline USB Kit

741279-B21

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04123175>

### HPE Care Pack Services

#### Proactive Care Services

HPE 3 year Proactive Care 24x7 BL4xxc Gen9 Service

U7BN8E

HPE 3 year Proactive Care 24x7 with DMR BL4xxc Gen9 Service

U7BN9E

HPE 3 year Proactive Care Advanced 24x7 BL4xxc Gen9 Service

U7BT6E

HPE 3 year Proactive Care Advanced 24x7 with DMR BL4xxc Gen9 Service

U7CF8E

#### Installation Services

HPE Install c-Class Server Blade Service

UE493E

**NOTE:** Additional HPE Care Pack services can be found at:

[http://www8.hp.com/us/en/business-services/it-services.html?compURI=1077422#.V9HL\\_fkrKCg](http://www8.hp.com/us/en/business-services/it-services.html?compURI=1077422#.V9HL_fkrKCg)



## Memory

For detailed memory configuration rules and guidelines, please use the Online DDR4 Memory Configuration Tool:

<https://h22195.www2.hpe.com/DDR4memoryconfig/Home/LEGAL>

### Memory Subsystem Architecture

Each Intel® Xeon® E5-2600 v3 family or Intel® Xeon® E5-2600 v3 family processor socket contains four memory channels that support two DIMMs each for a total of eight (8) DIMM per installed processor or a grand total of sixteen (16) DIMMs for the server. Up to 64GB capacity DIMMs are supported for 1TB of memory (16 DIMM slots x 64GB per DIMM).

**NOTE:** 64GB DIMM support available in earl 2015.

### Memory Population Rules and Guidelines:

- A minimum of one DIMM is required per processor.
- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two processor system, only half of the DIMM slots are available.
- DIMM sizes can be mixed in channel. To maximize performance, it is recommended to balance the total memory capacity between all installed processors and to load the channels similarly whenever possible.
- LRDIMM and RDIMMs are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen9 servers support RDIMM and LRDIMM.
- DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the memory type and number of installed processors.
- HPE memory from previous generation servers is not compatible with the BL460c Gen9 Server Blade.
- To realize the performance memory capabilities listed in this document, HPE SmartMemory is required. For additional information, please see the HPE SmartMemory QuickSpecs at:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111535>

### Supported Memory Bandwidth on Intel® Xeon® E5-2600 v3 series Processors

DIMM Rank	Register DIMM (RDIMM)				Load Reduced (LRDIMM)		
	Single Rank (1R)	Dual Rank (2R)			Dual Rank (2R)	Quad Rank (4R)	
DIMM Capacity	8GB	16GB	8GB	32GB	16GB	32GB	64GB
Voltage	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V
<b>SLOTS THAT CAN BE POPULATED</b>							
12 slot servers	12	12	12	12	12	12	NA
16 slot servers	16	16	16	16	16	16	16
<b>MAXIMUM CAPACITY (GB)*</b>							
12 slot servers	96	192	96	384	192	384	NA
16 slot servers	128	256	128	512	256	512	1024
<b>POPULATED DIMM SPEED (MT/s)</b>							
1 DIMM Per Channel	2133	2133	2133	2133	2133	2133	2133
2 DIMM Per Channel	2133	2133	2133	2133	2133	2133	2133

## Memory

\*Maximum Capacity will vary based on individual serve platform qualification schedule


### Supported Memory Bandwidth on Intel® Xeon® E5-2600 v4 series Processors

DIMM Rank	Register DIMM (RDIMM)				Load Reduced (LRDIMM)	
	Single Rank (1R)		Dual Rank (2R)		Dual Rank (2R)	Quad Rank (4R)
DIMM Capacity	8GB	16GB	16GB	32GB	32GB	64GB
Voltage	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V
<b>SLOTS THAT CAN BE POPULATED</b>						
12 slot servers	12	12	12	12	12	12
16 slot servers	16	16	16	16	16	16
<b>MAXIMUM CAPACITY (GB)*</b>						
12 slot servers	96	192	192	384	384	768
16 slot servers	128	256	256	512	512	1024
<b>POPULATED DIMM SPEED (MT/s)</b>						
1 DIMM Per Channel	2400	2400	2400	2400	2400	2400
2 DIMM Per Channel	2133	2133	2400	2400	2400	2400

\*Maximum Capacity will vary based on individual serve platform qualification schedule

Memory

Memory options part number decoder

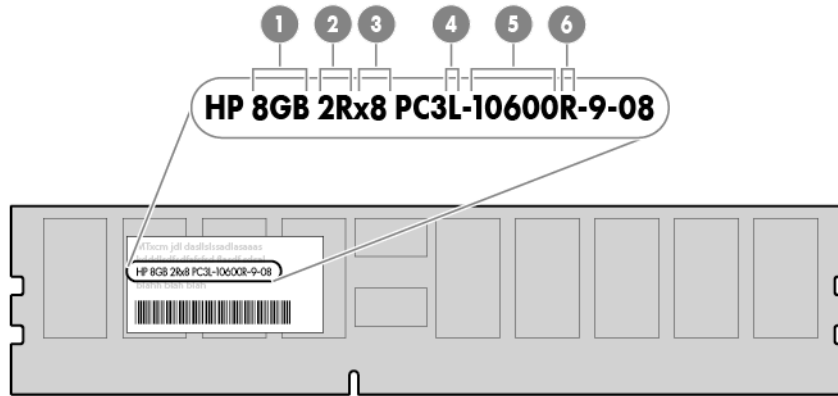

Item	Description	Definition
1	Capacity	8 GByte 16 GByte 32 GByte
2	Rank	1R = Single-rank 2R = Dual-rank 4R = Quad-rank
3	Data width	x4 = 4-bit x8 = 8-bit
4	Memory generation	DDR4
5	Max. Memory speed	2133MT/s
6	CasLatency	P = 15
6	DIMM type	R = RDIMM (registered) L = LRDIMM (load reduced)

Following are memory options available from Hewlett Packard Enterprise:

**HPE Memory**

**NOTE:** HPE memory from previous generation servers (DDR3) is not compatible with this server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the HPE SmartMemory QuickSpecs at:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111535>

**NOTE:** LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

**NOTE:** Depending on the memory configuration and processor model, the memory speed may run at 2400MT/s, 2133MT/s, 1866MT/s, or 1600MT/s.

**Registered DIMMs (RDIMMs) - E5-2600 v4 series Processors**

HP 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit

805347-B21

HP 16GB (1x16GB) Single Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit

805349-B21

## Memory

HPE 16GB (1x16GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	836220-B21
HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805351-B21

### Load Reduced DIMMs (LRDIMMs) - E5-2600 v4 series Processors

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit	805353-B21
HPE 64GB (1x64GB) Quad Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit	805358-B21

### Registered DIMMs (RDIMMs)


#### Registered DIMMs (RDIMMs) - E5-2600 v3 series Processors

HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit	759934-B21
HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726718-B21
HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726719-B21
HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	728629-B21

#### Load Reduced DIMMs (LRDIMMs) - E5-2600 v3 series Processors

HP 48GB (1x16GB +1x32GB) DDR4-2133 CAS-15-15-15 Load Reduced Memory FIO Kit	792278-B21
HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726722-B21
HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726720-B21
HP 64GB (1x64GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726724-B21

## Storage

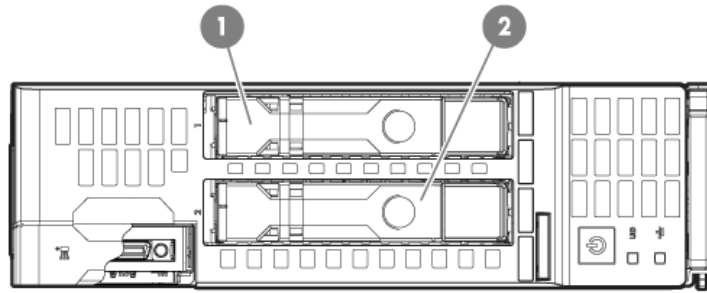

1-2 2 x SFF hot-plug SAS, SATA, SAS SDD, and SATA SSD hard drives

## Technical Specifications

<b>System Unit</b>	<b>Dimensions</b> (H x W x D) (with bezel)	7.11 x 2.18 x 20.37 in (18.07 x 5.54 x 51.76 cm)				
	<b>Weight</b> (approximate)	<table border="0"> <tr> <td>Maximum: all processors, 16 DIMMs, hard drives, mezzanine cards, and two flash cache batteries installed)</td> <td>14.00 lb (6.33 kg)</td> </tr> <tr> <td>Minimum: one processor and 2 DIMMs installed</td> <td>10.50 lb (4.75 kg)</td> </tr> </table>	Maximum: all processors, 16 DIMMs, hard drives, mezzanine cards, and two flash cache batteries installed)	14.00 lb (6.33 kg)	Minimum: one processor and 2 DIMMs installed	10.50 lb (4.75 kg)
Maximum: all processors, 16 DIMMs, hard drives, mezzanine cards, and two flash cache batteries installed)	14.00 lb (6.33 kg)					
Minimum: one processor and 2 DIMMs installed	10.50 lb (4.75 kg)					
	<b>Power Specifications</b>	<p>For power specifications including input requirements, BTU rating, and power supply output, please see the:</p> <ul style="list-style-type: none"> <li>• HPE BladeSystem c3000 Enclosure QuickSpecs at <a href="https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04128340">https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04128340</a></li> <li>• HPE BladeSystem c7000 Enclosure QuickSpecs at <a href="https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04128339">https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04128339</a></li> </ul> <p>To review typical system power ratings use the HPE Power Advisor which is available via the online tool located at <a href="https://paonline56.itcs.hpe.com">https://paonline56.itcs.hpe.com</a>.</p> <p><b>NOTE:</b> For optimal cooling and system performance the BL460c Gen9 Server Blade requires the c7000 enclosure to be configured with 10 fans and the c3000 enclosure to be configured with 6 fans.</p>				
	<b>System Inlet Temperature</b>	<table border="0"> <tr> <td>Operating</td> <td>10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1,000 ft) above sea level to a maximum of 3,050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F).</td> </tr> <tr> <td>Non-operating</td> <td>-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).</td> </tr> </table>	Operating	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1,000 ft) above sea level to a maximum of 3,050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F).	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
Operating	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1,000 ft) above sea level to a maximum of 3,050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F).					
Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).					
	<b>Extended Ambient Operating Support</b>	<p>For Approved hardware configurations, the supported system inlet range is extended to be:</p> <p>5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft)</p> <p><b>NOTE:</b> Qualifications for extended ambient configurations are detailed at: <a href="https://h20566.www2.hpe.com/hpsc/doc/public/display?sp4ts.oid=7271259&amp;docId=emr_na-c04513664&amp;docLocale=en_US">https://h20566.www2.hpe.com/hpsc/doc/public/display?sp4ts.oid=7271259&amp;docId=emr_na-c04513664&amp;docLocale=en_US</a></p>				
	<b>Relative Humidity</b> (non-condensing)	<table border="0"> <tr> <td>Operating</td> <td>10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.</td> </tr> <tr> <td>Non-operating</td> <td>5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.</td> </tr> </table>	Operating	10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.	Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
Operating	10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.					
Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.					
	<b>Altitude</b>	Operating 3,050 m (10,000 ft). This value may be limited by the				

## Technical Specifications

	type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1,500 ft/min).
Non-operating	9,144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1,500 ft/min).

<b>Acoustic Noise</b>	For acoustic noise specifications, please see the HPE BladeSystem c-Class Enclosures QuickSpecs located at: <ul style="list-style-type: none"> <li>HPE BladeSystem c3000 Enclosure QuickSpecs: <a href="https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128340.pdf">https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128340.pdf</a></li> <li>HPE BladeSystem c7000 Enclosure QuickSpecs: <a href="https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128339.pdf">https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128339.pdf</a></li> </ul>
-----------------------	--

---

<b>HPE Smart Array P244br Controller</b>	<b>Disk Drive Interface</b>	12Gb/s SAS (Serial Attached SCSI) 6Gb/s SATA (Serial ATA)
	<b>Server Interface</b>	x8 5G PCIe 3.0 provides 8GB/s maximum bandwidth
	<b>Cache Memory</b>	1GB flash backed write cache (FBWC) cache standard
	<b>Logical Drives Supported</b>	64 (with included 1GB cache)
	<b>Host Memory Addressing</b>	64-bit, supporting servers memory space greater than 4GB
	<b>RAID Support</b>	RAID 1 (mirroring), RAID 0 (striping), RAID 10
	<b>Other</b>	Upgradeable firmware with recovery ROM Online drive flash (with SAS drives)

---

<b>HPE Smart HBA H244br Controller</b>	<b>Disk Drive Interface</b>	12Gb/s SAS (Serial Attached SCSI) 6Gb/s SATA (Serial ATA)
	<b>Server Interface</b>	x8 5G PCIe 3.0 provides 8GB/s maximum bandwidth
	<b>Cache Memory</b>	None
	<b>Logical Drives Supported</b>	64
	<b>Host Memory Addressing</b>	64-bit, supporting servers memory space greater than 4GB
	<b>RAID Support</b>	RAID 1 (mirroring) and RAID 0 (striping)
	<b>Other</b>	Upgradeable firmware with recovery ROM Online drive flash (with SAS drives)

---

<b>HPE Dynamic Smart Array B140i Controller</b>	<b>Disk Drive Interface</b>	6Gb/s SATA (Serial ATA)
	<b>Server Interface</b>	Embedded x4 PCIe 2.0
	<b>SAS Connectors</b>	2 internal SATA ports
	<b>Cache Memory</b>	None
	<b>SAS Speed</b>	6Gb/s SATA links
	<b>Logical Drives Supported</b>	Up to 10 logical volumes (2 physical drives)
	<b>Host Memory Addressing</b>	64-bit, supporting greater than 4GB server memory space
	<b>Hot Plug Support</b>	Yes

## Technical Specifications

	<b>RAID Support</b>	RAID 1 (Mirroring) RAID 0 (Striping)
	<b>Other</b>	Upgradeable firmware with recovery ROM
<b>HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM</b>	<b>Type</b>	Integrated dual-port KR 10Gb FlexibleLOM with FlexFabric (Flex-10, FCoE, hardware-based iSCSI, iSCSI boot, TCP/IP offload engine, and autosensing 1Gb/10Gb Ethernet capability)
	<b>Network Processor</b>	QLogic 57840S with integrated MAC/PHY
	<b>Data Transfer Method</b>	x8 PCI Express 3.0
	<b>Network Transfer Rate</b>	Two ports, each at 20Gbps full duplex; 40Gbps aggregate full duplex theoretical bandwidth <b>NOTE: Each port is autosensing 1Gb/10Gb, and can interoperate with 1Gb or 10Gb HPE BladeSystem c-Class interconnect components. Both ports will operate at the same speed.</b> <b>NOTE: Each port on the 536FLB adapter transmits from the server at 20Gbps (theoretical) full duplex.</b>
	<b>IEEE Compliance</b>	802.1p, 802.1q, 802.1qau, 802.3ad, 802.3ae, 802.3ap (10GBase-KX4) and 802.3x
	<b>Standard Features</b>	Full hardware offload of iSCSI and FCoE storage protocol processing for highest performance converged Ethernet data and storage networks. Dual-port 10GbE Flex-10 FlexibleLOM network adapter that provides the flexibility to choose the type of LOM to meet growing infrastructure needs Industry-leading throughput and latency performance Supports the HPE Flex-10 blade interconnect technology User configurable bandwidth settings when combined with the 10Gb Flex-10 Virtual Connect module. From 100Mb/s to 10Gb/s on up to four "Physical Function" NICs per port, in increments of 100Mb/s for NIC. The combined bandwidth of NICs cannot exceed port bandwidth i.e. 10 Gb. Up to 40Gb/s bi-directional near line rate throughput Hardware acceleration and offloads for stateless TCP/IP, TCP Offload Engine (TOE) Improved small packet performance Support for Preboot eXecution Environment (PXE) Integrated PHY and MAC Supports for SR-IOV Support for Network Partitioning (NPAR)
<b>HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM</b>	<b>Type</b>	Integrated dual-port KR2 20Gb FlexibleLOM with FlexFabric (Flex-20, FCoE, RoCE, Tunnel Offload with VXLAN/NVGRE, hardware-based iSCSI, iSCSI boot, TCP/IP offload engine, and autosensing Ethernet speed capability)
	<b>Network Processor</b>	Emulex XE-104
	<b>Data Transfer Method</b>	x8 PCI Express 3.0
	<b>Network Transfer Rate</b>	Two ports, each at 40 Gbps bi-directional; 80 Gbps aggregate bi-directional theoretical bandwidth
	<b>IEEE Compliance</b>	802.3ae, 802.1Q, 802.3x, 802.1p, 802.3ad/LACP, 802.1AB(LLDP), 802.1Qbg, 802.1Qbb, 802.1Qaz, 802.3ap
	<b>Standard Features</b>	Dual 20Gb ports provide up to 80Gb bi-directional per adapter Multi-speed adapter operates at either 20GbE or 10GbE



## Technical Specifications

Converges FCoE or RoCE with LAN traffic on a single Ethernet wire  
 Tunnel Offload support for VXLAN and NVGRE  
 RDMA over Converged Ethernet (RoCE) for greater server efficiency and lower latency (6125XLG only)  
 Advanced storage offload processing freeing up valuable CPU cycles  
 Supports UEFI and legacy boot options  
 Mixed Storage – supports NIC + FCoE on one port, and NIC + iSCSI on the other  
 Concurrent Storage – concurrently supports NIC, FCoE, and iSCSI storage functions on the same port (NIC + FCoE + iSCSI)  
 Industry-leading throughput and latency performance  
 Supports the HPE Flex-20 blade interconnect technology  
 Over eight million small packets/s, ideal for web/mobile applications, mobile messaging, and social media  
 User configurable bandwidth settings when combined with the 20Gb Flex-20 Virtual Connect module. From 100Mb/s to 10Gb/s on up to four "Physical Function" NICs per port, in increments of 100Mb/s for NIC. The combined bandwidth of NICs cannot exceed port bandwidth i.e. 20 Gb/s.  
 Greater bandwidth with PCIe 3.0  
 Jumbo Frames support  
 Supports Wake On LAN (WOL)  
 Support for Preboot eXecution Environment (PXE)  
 Support for Microsoft Windows SMB Direct  
 Optimized host virtualization density with SR-IOV support

---

### Environment-friendly Products and Approach

### End-of-life Management and Recycling

Hewlett Packard Enterprise offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hpe.com/info/recycle>. To recycle your product, please go to: <http://www.hpe.com/info/recycle> or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: <http://www.hpe.com/info/recycle>. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

## Summary of Changes

Date	Version History	Action	Description of Change
27-Mar-2017	From Version 22 to 23	Changed	Overview, Core Options, and Additional Options sections were updated.
		Removed	Obsolete SKUs were deleted: 718162-B21, 652589-B21, 652583-B21, 652564-B21, 652611-B21, 652564-B21, 652611-B21, 764923-B21, 764925-B21, 764929-B21, 817011-B21, 816995-B21, 816985-B21, 816909-B21.
13-Feb-2017	From Version 21 to 22	Added	SKUs added: 872355-B21, 872359-B21, 872363-B21, 870753-B21, 870757-B21, 870759-B21, 870763-B21, 870765-B21, 872475-B21, 872477-B21, 872479-B21, 872481-B21, 872344-B21, 872348-B21, 872352-B21, 869374-B21, 869376-B21, 869378-B21, 869384-B21, 869386-B21.
		Changed	Memory section was corrected.
		Removed	Obsolete SKUs were deleted: 854845-B21
28-Nov-2016	From Version 20 to 21	Added	SKUs added: 868814-B21, 868818-B21, 868822-B21, 868826-B21, 868830-B21, 871768-B21, 871770-B21, 872853-B21, 872855-B21
		Removed	Turn Off Skus deleted: 816879-B21, 816889-B21, 816899-B21, 816919-B21, 816965-B21, 822559-B21, 816975-B21. Obsolete SKUs were deleted: 655708-B21, 652745-B21, 717965-B21, 757339-B21, 717973-B21, 739898-B21, 717971-B21, 691868-B21, 691866-B21, 691862-B21, 789145-B21.
16-Sep-2016	From Version 19 to 20	Changed	QuickSpecs information was updated.
		Removed	Obsolete SKUs were deleted: 651281-B21, 734360-B21, 739888-B21, 717969-B21, 756636-B21, BD883A, 854845-B21
06-Jun-2016	From Version 18 to 19	Changed	Models, Configuration Information - Factory Integrated Models, Core Options, Memory, and Technical Specifications sections were updated.
		Added	SKUs added in Related Options and Core Options sections: 854845-B21, 809208-B21, 846436-B21
31-Mar-2016	From Version 17 to 18	Changed	Standard Features, Configuration Information - Factory Integrated Models, Additional Options, Technical Specifications, Smart Buys, Models, and Core Options, sections were updated.
		Added	SKUs added to QuickSpecs: 813198-B21, 819852-L21, 819851-L21, 819842-L21, 819841-L21, 819840-L21, 819849-L21, 819839-L21, 819845-L21, 819846-L21, 819844-L21, 819838-L21, 819837-L21, 819856-L21, 819855-L21, 819854-L21, 819857-L21, 819853-L21, 819850-L21, 819848-L21, 819847-L21, 805347-B21, 805349-B21, 836220-B21, 805351-B21, 805353-B21, 805358-B21, 825555-B21, 819852-B21, 819851-B21, 819842-B21, 819841-B21, 819840-B21, 819849-B21, 819839-B21, 819845-B21, 819846-B21, 819844-B21, 819838-B21, 819837-B21, 819843-B21, 819856-B21, 819855-B21, 819854-B21, 819857-B21, 819853-B21, 819850-B21, 819848-B21, 819847-B21, 764908-B21, 764906-B21, 764904-B21, 765044-B21, 765038-B21, 765036-B21, 765034-B21, 764892-B21, 736939-B21, 736936-B21, 802891-B21, 846430-B21, 846432-B21, 846434-B21,

## Summary of Changes

			846436-B21, 816879-B21, 838404-B21, 838406-B21, 838408-B21, 838410-B21, 838412-B21, C6N36ABE, F6Q89A.
		Removed	Obsolete SKUs were deleted: 756601-B21, 691864-B21, C6N31A, P8B31A, 825555-B21.
16-Feb-2016	From Version 16 to 17	Changed	Information updated in different sections.
		Added	SKUs Added in Core Options sections: 846495-B21, 846497-B21, 832514-B21.
		Removed	Obsolete SKUs were deleted: 789135-B21, E5Y38A, E5Y39AAE, QK763A, QK762A, QK761A, D8585AAE, D8584A.
09-Oct-2015	From Version 15 to 16	Changed	Core Options section was updated.
		Added	SKUs added: P8B24A, P8B26AAE, P8B31A
		Removed	Obsolete SKUs were deleted: 756621-B21, 756657-B21, 789155-B21
28-Sep-2015	From Version 14 to 15	Added	SKU added in Additional Options: 745823-B21
28-Aug-2015	From Version 13 to 14	Changed	Information in Core Options section was updated.
		Added	SKUs added in Core Options section: 659818-B21, 651281-B21
17-Aug-2015	From Version 12 to 13	Changed	Standard Features, Optional Features, Configuration Information - Factory Integrated Models, Core Options and Memory sections were updated.
		Added	SKUs added in Additional Options and Core Options sections: C9A82AAE, 804677-B21, 804671-B21, 804665-B21, 804639-B21, 804631-B21, 804625-B21, 832414-B21, 804613-B21, 804605-B21, 804599-B21, 804593-B21, 804587-B21, 804581-B21, 804575-B21.
		Removed	Obsolete SKU deleted: F6Q89AAE
19-Jun-2015	From Version 11 to 12	Changed	Information updated.
1-Jun-2015	From Version 10 to 11	Changed	Information in Optional Features, Configuration Information- Factory Integrated, and Models sections was updated.
		Added	SKUs added: 726724-B21, 748387-B21, 791034-B21, 726793-B21
		Removed	SKUs removed: 726793-B21, 741159-B21, 741151-B21
6-Apr-2015	From Version 9 to 10	Changed	Industry Standard Compliance and Additional Options sections were updated
30-Mar-2015	From Version 8 to 9	Added	SKUs Added: 741279-B21, 728629-B21, 726793-B21, 749975-B21, 726782-B21, 727261-B21, 802578-B21, 802582-B21, 802586-B21, 802891-B21, 781516-B21, 785067-B21, 765453-B21, 765455-B21, 765464-B21, 765466-B21, 789135-B21, 789145-B21, 789155-B21, 794603-B21, 794605-B21, 781518-B21, 785069-B21
		Removed	Obsolete SKUs Deleted: 741146-B21, 741138-B21
27-Feb-2015	From Version 7 to 8	Changed	Smart Buy 779805-S01 processor was updated in Product Bulleting US version.
9-Feb-2015	From Version 6 to 7	Changed	Core Options and Additional Options sections were updated
		Added	SKUs Added on Hard Drives section: 779164-B21, 779168-B21, 779172-B21, 779176-B21, 764923-B21, 764925-B21, 764927-B21, 764929-B21
		Removed	SKUs removed: 728935-B21, 718939-B21

## Summary of Changes

12-Dec-2014	From Version 5 to 6	Changed	Descriptions were updated throughout the QuickSpecs.
		Added	SKU Added on HPE Smart Memory: 792278-B21
1-Dec-2014	From Version 4 to 5	Changed	Overview, Standard Features, Configuration Information - Factory Integrated Models and Core Options sections were updated
		Added	SKUs added: 759934-B21, 726720-B21, 775588-B21, 785233-B21, 757339-B21, 756657-B21, 756621-B21
		Removed	SKU E5Y35AAE deleted due to compatibility issues
10-Oct-2014	From Version 3 to 4	Changed	Smart Buy section added to the NA version only
8-Oct-2014	From Version 2 to 3	Changed	Network Controller, Enclosures and Compatible SAN sections were updated
		Added	HPE I/O Accelerator Options section has been added including following SKUs: QK763A, QK762A, QK761A
		Removed	Expansion Blade Support section was deleted
17-Sep-2014	From Version 1 to 2	Changed	Changes made throughout the Standard Features, Models, SmartMemory, Core Options and Carepacks sections.



[hp.com/qref/bl460cgen9](http://hp.com/qref/bl460cgen9)



**Sign up for updates**

© Copyright 2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

c04380273 - 15052 - North America - V23 - 27-March-2017

