

PowerEdge M915

Technical Guide



Maximized performance and bandwidth for mission-critical workloads and applications

This document is for informational purposes only. Dell reserves the right to make changes without further notice to any products herein. The content provided is as is and without express or implied warranties of any kind.

Dell, the Dell logo, PowerEdge, and OpenManage are trademarks of Dell, Inc. AMD, AMD Opteron, AMD PowerNow!, AMD-V, CoolCore, and combinations thereof are trademarks of Advanced Micro Devices, Inc. Broadcom is a registered trademark of Broadcom Corporation and/or its affiliates in the United States, certain other countries and/or the EU. Brocade is a registered trademark of Brocade Communications Systems, Inc. in the United States and/or in other countries. Citrix and XenServer are registered trademarks of Citrix Systems, Inc. and/or one or more of its subsidiaries, and may be registered in the United States Patent and Trademark Office and in other countries. Emulex is a registered trademark of Emulex Corporation. ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. Intel and Xeon are registered trademarks of Intel Corporation in the U.S. and other countries. Linux is a registered trademark of Linus Torvalds. Matrox is a registered trademark of Matrox Electronic Systems Ltd. Mellanox and ConnectX are registered trademarks of Mellanox Technologies, Inc. Microsoft, Windows, Windows Server, SQL Server, BitLocker, and Hyper-V are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Novell and SUSE are registered trademarks of Novell, Inc. in the United States and other countries. QLogic is a registered trademark of QLogic Corporation. Red Hat is a registered trademark of Red Hat, Inc. in the United States and other countries. VMware and vSphere are registered trademarks; ESXi is a trademark of VMware, Inc. in the United States and/or other jurisdictions. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Dell disclaims proprietary interest in the marks and names of others.

©Copyright 2013 Dell Inc. All rights reserved. Reproduction or translation of any part of this work beyond that permitted by U.S. copyright laws without the written permission of Dell Inc. is unlawful and strictly forbidden.

December 2013 | Version 5.0

Table of Contents

1	Product comparison	7
	Overview	7
	Maximum workload performance	7
	Boost business performance	7
	Throughput, throughput, throughput	7
	Enterprise-class manageability and efficiency	7
	Comparison	8
2	Key technologies	11
3	System information	12
4	Mechanical	14
	Chassis description	14
	Dimensions and weight	14
	Front view and features	14
	Back view and features	15
	Power supply indicators	15
	LED indicators	15
	Side view	16
	Internal chassis View	17
	Rails and cable management	17
	Chassis view	18
	Fans	18
	Cabling	18
	Control panel/LCD	18
	Security	18
	Cover latch	19
	TPM (Trusted Platform Module)	19
	Power off security	19
	USB Key	19
	Battery	19
	Field replaceable units (FRU)	19
	User accessible jumpers, sockets and connectors	19
5	Power, thermal and acoustics	20
	Power supplies	20
	Power efficiency	20
	Environmental specifications	20
	ENERGY STAR compliance	21
	Thermal	21
	Acoustics	22
	Definitions	22
6	Processors	23
	Overview	23
	Features	23
	AMD Opteron 6200 series processors	24
	AMD Opteron 6300 series processors	24
	Supported processors	24
	Processor configurations	26
	Processor installation	26
7	Memory	27
	Overview	27
	DIMMs supported	27
	DIMM slots	27

DIMM population guidelines.....	27
Memory speed	27
Sparing	28
Mirroring.....	28
Memory scrubbing	28
8 Chipset	29
Overview	29
AMD I/O bridges	29
HyperTransport 3 (HT-3).....	29
Southbridge link interface	29
AMD SP5100 Southbridge.....	29
PCIe mezzanine connectors	30
9 BIOS	31
Overview	31
Supported ACPI states	31
10 Embedded LAN on motherboard (LOM).....	32
PCIe network daughtercards.....	32
Broadcom BCM5709S	32
Broadcom BCM57712	32
11 I/O mezzanine card options	34
Overview	34
Options.....	34
12 Storage	35
Drives	35
Hard disk drive carriers	35
Empty drive bays.....	35
Diskless configuration support.....	35
RAID configurations	36
Storage controllers.....	36
PERC H200 Modular	36
PERC H700 Modular	36
SATA repeater	37
Optical drives.....	37
External storage	37
13 Video.....	38
14 Rack information	39
15 Operating systems	40
16 Virtualization	41
Overview	41
Advanced Infrastructure Manager by Scalent	41
17 Systems management.....	42
Overview	42
Server management.....	42
Embedded server management.....	42
Dell Lifecycle Controller and Unified Server Configurator	43
Integrated Dell Remote Access Controller	43
iDRAC6 Enterprise	43
iDRAC6 Enterprise with Virtual Flash (vFlash) Media	44
Chassis Management Controller (CMC).....	45
18 USB peripherals	46

Appendix A.	Statement of volatility	47
Appendix B.	Certifications.....	51
	Regulatory certifications	51
	Product safety certifications.....	51
	Electromagnetic compatibility	52
	Ergonomics, acoustics and hygienics.....	52
Appendix C.	Industry standards	53

Tables

Table 1.	PowerEdge M915 comparison to M910, R815 and R910.....	8
Table 2.	Product features summary	12
Table 3.	Environmental specifications	20
Table 4.	Acoustical performance of M1000e chassis with four M915 blades installed	22
Table 5.	AMD Opteron 6100, 6200 and 6300 series processors	23
Table 6.	Supported AMD Opteron 6100 series processors.....	24
Table 7.	Supported AMD Opteron 6200 series processors	25
Table 8.	Supported AMD Opteron 6300 series processors	25
Table 9.	Supported hard drives	35
Table 10.	Factory RAID configurations	36
Table 11.	Supported storage controllers	36
Table 12.	Supported video modes.....	38
Table 13.	Virtualization software.....	41
Table 14.	Unified Server Configurator features and description.....	43
Table 15.	Features list for base management functionality, iDRAC and vFlash Media.....	44
Table 16.	Volatility.....	47
Table 17.	Product safety certifications.....	51
Table 18.	Electromagnetic compatibility certifications	52
Table 19.	Ergonomics, acoustics and hygienics	52
Table 20.	Industry standards.....	53

Figures

Figure 1.	Front view	14
Figure 2.	Back view	15
Figure 3.	Side view	16
Figure 4.	Internal chassis view	17
Figure 5.	M1000e chassis	18
Figure 6.	2.5" Hard drive carrier	35

1 Product comparison

Overview

The Dell™ PowerEdge™ M915 is a four-socket, full-height blade server ideal for mission-critical applications needing maximum I/O scalability and performance.

Maximum workload performance

Input, process, analyze and report data on the same platform. Consolidate servers and scale during peak workloads. With up to 64 processor cores, the Dell PowerEdge M915 offers you the performance you need to run your important business applications and workloads. Get the ability to run robust virtual machines (VMs), maximize the number of virtual machines being run per server and reap all the benefits of consolidation. The M915 can also help increase database performance by taking advantage of the high processor core count to run more tasks simultaneously.

Boost business performance

The PowerEdge M915 offers robust AMD Opteron™ processors designed to:

- Deliver up to 64 processor cores for optimal four-socket performance with two-socket value and provide the essential features needed to operate your consolidated infrastructure efficiently.
- Give you the ability to monitor power and thermals at the processor level and assist with platform efficiency.
- Offer vast pools of processor cores to be deployed, which is ideal for assignment to virtualized servers. A fully loaded M1000e chassis with eight PowerEdge M915 blade servers running up to 16-core AMD Opteron 6100, 6200 and 6300 series processors can yield up to 512 processor cores per chassis or 51.2 cores per U.

Throughput, throughput, throughput

Unleash the potential of your consolidated VMs with more I/O throughput:

- Maximizing both 10GbE and GbE port counts provides your virtualized applications the dedicated bandwidth they need in I/O-intensive environments.
- Enabling the choice of fabric and vendor can enhance your flexibility to adopt and deploy networks at your own pace.
- Using up to six dual-port 10GbE network cards can bring the total aggregate throughput into a single server to an amazing 120Gbps.

An integrated, flexible network daughtercard enables a choice of embedded network adapters. Select either GbE network interface cards (NICs) or 10Gb converged network adapters (CNAs) to attach to M1000e I/O modules, such as the Dell Networking M8428-k converged network switch. I/O traffic can then flow to your existing Dell or third-party switching infrastructure.

Enterprise-class manageability and efficiency

Spend more time creating business value and less on planning, deploying and managing IT. Spend less money keeping the lights on and cooling servers, reclaiming more resources for strategic business needs.

- **One-to-many updating:** The Chassis Management Controller and Lifecycle Controller simplify the update process for BIOS, firmware and drivers on a one-to-many basis without additional software. Multi-chassis management provides one console access to several blade enclosures.
- **Industry leading power and cooling:** Efficient power supplies (fully redundant up to 92 percent) utilize minimal power without compromising productivity. High-efficiency fans and intuitive chassis airflow ducting drive enterprise-class power consumption draw.
- **Enterprise-class high-availability:** Dual optional failsafe embedded hypervisors and hard drive fault tolerance through the hardware RAID controller (PERC) offer data-protective redundancy that safeguards your organization from IT loss or corruption.

Comparison

Table 1. PowerEdge M915 comparison to M910, R815 and R910

Feature	M910	M915	R815	R910
Processor	Intel® Xeon® E7-2800, E7-4800 and E7-8800 product families or Intel Xeon processor 6500 and 7500 series	AMD Opteron 6100, 6200 and 6300 series processors	AMD Opteron 6100, 6200 and 6300 series processors	Intel Xeon E7-4800 and E7-8800 product family Intel Xeon processor 7500 series
Front side bus	Intel QuickPath Interconnect (QPI)	HyperTransport-3 (HT-3)	HyperTransport-3 (HT-3)	Intel QuickPath Interconnect (QPI)
Sockets	4	4	4	4
Cores	6, 8, or 10	8 or 12	8 or 12	6, 8, or 10
L3 Cache	30MB	12MB	12MB	30MB
Chipset	Intel 7500	AMD SR5670 and SP5100	AMD SR5650, SR5670 and SP5100	Intel 7500
DIMMs	32 DDR3	32 DDR3	32 DDR3	64 DDR3
Min/Max RAM	4GB/1TB	8GB/1TB	8GB/512GB	4GB/2TB
Form factor	Full-height blade, dual-slot See M1000e Technical Guide	Full-height blade, dual-slot See M1000e Technical Guide	2U rack	4U rack
Drive bays	2 x 2.5" hot-plug	2 x 2.5" hot-plug	6 x 2.5" hot-plug	16 x 2.5" hot-plug
Hard drive types	SAS SSD, SATA SSD, SAS, nearline SAS	SATA SSD, SAS	SAS SSD, SATA SSD, SAS, nearline SAS, SATA	SATA SSD, SAS, nearline SAS, SATA
Embedded hard drive controller	PERC H200 PERC H700 PERC 6/i	PERC H200 PERC H700	PERC H200 PERC H700	PERC H200 PERC H700
Optional hard drive controller	PERC H200 PERC H700 PERC 6/i	PERC H200 PERC H700	PERC H200 PERC H700	PERC H200 PERC H700

Feature	M910	M915	R815	R910
Availability	Hot-plug hard drives Hot-plug redundant power and cooling ECC memory Single Device Data Correction (SDDC) Support for memory demand and patrol scrubbing High availability failover cluster support	Hot-plug hard drives Hot-plug redundant power and cooling ECC memory Single Device Data Correction (SDDC) Support for memory demand and patrol scrubbing High availability failover cluster support	Hot-plug hard drives Hot-plug redundant power and cooling ECC memory Single Device Data Correction (SDDC) Support for memory demand and patrol scrubbing High availability failover cluster support	Hot-plug hard drives Hot-plug redundant power and cooling ECC memory Single Device Data Correction (SDDC) Support for memory demand and patrol scrubbing High availability failover cluster support
Server management	iDRAC6 Enterprise, BMC, IPMI 2.0, Dell OpenManage™, Chassis Management Controller Optional: vFlash media	iDRAC6 Enterprise, BMC, IPMI 2.0, Dell OpenManage, Chassis Management Controller Optional: vFlash media	iDRAC6 Express, BMC, IPMI 2.0, Dell OpenManage Optional: iDRAC6 Enterprise, vFlash media	iDRAC6 Express, BMC, IPMI 2.0, Dell OpenManage Optional: iDRAC6 Enterprise, vFlash media
Mezzanine/ PCIe slots	Four x8 PCIe mezzanine slots	Four x8 PCIe mezzanine slots	Five x8 PCIe slots (three with x16 connectors) One x4 PCIe slot (x8 connector) One x4 storage slot (x8 connector)	Standard: 7 PCIe slots (two x4, four x8, one x16) Optional: 10 PCIe (six x4, four x8)
NIC/LOM	4 x 1GbE LOMs Broadcom® BCM5709S	4 x 1GbE LOMs Broadcom BCM5709S or 2 x 10GbE Broadcom BCM57712	4 x 1GbE LOMs Broadcom BCM5709C	1GbE or 10Gb Embedded NIC Options: 4-port (4 x 1GbE) Embedded NIC Broadcom 5709C, or 4-port (2 x 10Gb SFP+ and 2 x 1GbE) Embedded NIC Broadcom 57711 + Broadcom 5709c Optional: various NICs available
USB	2 front, 1 internal	2 front, 1 internal	2 front, 4 back, 1 internal	2 front, 2 back, 1 internal

Feature	M910	M915	R815	R910
Power supplies	See M1000e Technical Guide	See M1000e Technical Guide	2 x 1100W	4 x 750W (Energy Smart) or 4 x 1100W (high-output)

2 Key technologies

The Dell PowerEdge M915 features AMD Opteron 6100, 6200 and 6300 series processors, designed specifically for high-end server applications, DDR3 memory, DIMM thermal sensors, PCI Express (PCIe) 2.0, an internal redundant SD module and iDRAC6 Enterprise.

The Opteron 6100, 6200 and 6300 series features up to twelve-core processing to maximize performance and performance/watt for data-center infrastructures and highly dense deployments. The processor also features the AMD Opteron micro-architecture and AMD64 architecture for flexibility in 64-bit and 32-bit applications and operating systems.

3 System information

For the latest information on supported features for the Dell PowerEdge M915, visit Dell.com/PowerEdge.

Table 2. Product features summary

Feature	Technical specification
Processors	AMD Opteron 6100, 6200 and 6300 series processors
Chipset	AMD (SR5670 and SP5100)
Memory¹	Up to 1TB (32 DIMM slots): 1GB/2GB/4GB/8GB/16GB/32GB DDR3 up to 1600MT/s
Drive Bays	Up to two 2.5" SSD or SAS hot-plug drives
Storage¹	<p>Hot-plug Hard Drive Options: 2.5" SATA SSD, SAS (15K, 10K)</p> <p>Maximum Internal Storage: Up to 2.4TB¹ per blade with 2 x 2.5" SAS (10K) 1.2TB hard drives</p> <p>External Storage: For information about Dell external storage options, visit Dell.com/Storage.</p>
RAID controller options	PERC H200 (6Gbps) PERC H700 (6Gbps) with 512MB battery-backed cache; 512MB, 1GB non-volatile battery-backed cache
I/O mezzanine card options	<p>Fully populated mezzanine card slots and switch modules that yield 3 highly available, redundant I/O fabrics per blade.</p> <p>Ethernet: Broadcom dual-port 1GbE with TOE (BCM-5709S) Intel dual-port 10GbE Broadcom dual-port 10GbE (BCM-57711)</p> <p>Enhanced 10 Gigabit Ethernet (10GbE): Intel dual-port Enhanced 10GbE (FCoE Ready) QLogic[®] dual-port CNA QME8142 (Enhanced 10GbE and FCoE) Brocade[®] BR1741M-k dual-port mezzanine CNA</p> <p>Fibre channel: QLogic dual-port FC8 fibre channel host bus adapter (HBA) (QME2572) Emulex[®] dual-port FC8 fibre channel HBA (LPe1205-M) Emulex 8 or 4Gbps fibre channel pass-through module QLogic dual-port FC16 fibre channel HBA (QME2662) Emulex dual-port FC16 fibre channel HBA (LPm16002B-D)</p> <p>InfiniBand™: Mellanox[®] dual-port ConnectX[®] quad data rate (QDR) InfiniBand Mellanox dual-port ConnectX-3 fourteen data rate (FDR10) 40Gb</p>

Feature	Technical specification
Operating systems	Microsoft® Windows Server® 2012 Microsoft Windows Server 2012 R2 (includes Hyper-V®) Microsoft Windows Server 2008 x86/x64 SP2 (x64 includes Hyper-V) Microsoft Windows Server 2008 R2 x64 SP1 (includes Hyper-V) Microsoft Windows® HPC Server 2008 Novell® SUSE® Linux® Enterprise Server 11 SP3 Red Hat® Enterprise Linux Virtualization Options: Citrix® XenServer® Microsoft Hyper-V, a server role in Microsoft Windows Server operating systems Red Hat Enterprise Virtualization® VMware® vSphere® ESXi™ For more information on the specific versions and additions, visit Dell.com/OSsupport .
Featured database applications	Microsoft SQL Server® solutions (see Dell.com/SQL) Oracle® database solutions (see Dell.com/Oracle)
Power supply	Supplied by Dell PowerEdge M1000e Blade Chassis
Video	Integrated Matrox® G200eW with 8MB memory
Remote management	iDRAC6 Enterprise (standard)
Systems management	BMC, IPMI 2.0 compliant Dell OpenManage Unified Server Configurator Lifecycle Controller iDRAC6 Enterprise with optional vFlash media Chassis Management Controller
Embedded hypervisor	Optional dual-media redundant hypervisor

¹GB means 1 billion bytes and TB equals 1 trillion bytes; actual capacity varies with preloaded material and operating environment and will be less.

For more information about the Dell blade solution, see the [PowerEdge M1000e Technical Guide](#) or the [PowerEdge M1000e Blade Chassis Spec Sheet](#).

4 Mechanical

Chassis description

The Dell PowerEdge M915 is a full-height blade server that requires an M1000e chassis to operate. It occupies 2 slots in the M1000e rack chassis for a maximum of 8 blades in one M1000e chassis. It can be mixed with other existing Dell blades and is designed to mix with possible future half-height-double-wide and full-height-double-wide blades. Some highlights include:

- Support for RAID
- Support for persistent storage (internal USB connector and two SD card slots)

Refer to the [PowerEdge M1000e Technical Guide](#) for more information.

Dimensions and weight

The PowerEdge M915 dimensions and weight are listed as follows:

- Height: 38.5 cm (15.2 in)
- Width: 5 cm (2 in)
- Depth: 48.6 cm (19.2 in)
- Weight: (maximum configuration) 12.7 kg (28 lb)

Front view and features

Figure 1 shows the front view of the M915.



Figure 1. Front view

See the Blade Features section in the About Your System chapter of the *Dell PowerEdge Modular Systems Hardware Owner's Manual* on Dell.com/Support/Manuals for more information.

Back view and features

Figure 2 shows the back view of the M915.



Figure 2. Back view

See the Blade Features section in the About Your System chapter of the *Dell PowerEdge Modular Systems Hardware Owner's Manual* on Dell.com/Support/Manuals for more information.

Power supply indicators

The power supplies must be connected to a power distribution unit (PDU), and not directly to an electrical outlet. The power supplies require a 200V–240V power source.

See the Power Supply Indicators section in the About Your System chapter of the *Dell PowerEdge Modular Systems Hardware Owner's Manual* on Dell.com/Support/Manuals for more information.

LED indicators

Each disk drive carrier has two LED indicators visible from the front of the system. One is a green LED for disk activity and the other is a bicolor (green/amber) LED for status information. The activity LED is driven by the disk drive during normal operation. The bicolor LED is controlled by the SEP device on the backplane. Both LEDs are used to indicate certain conditions under direction of a storage controller.

Side view

Figure 3 shows the side view of the M915.



Figure 3. Side view

Internal chassis View

Figure 4 shows the internal chassis view of the M915.

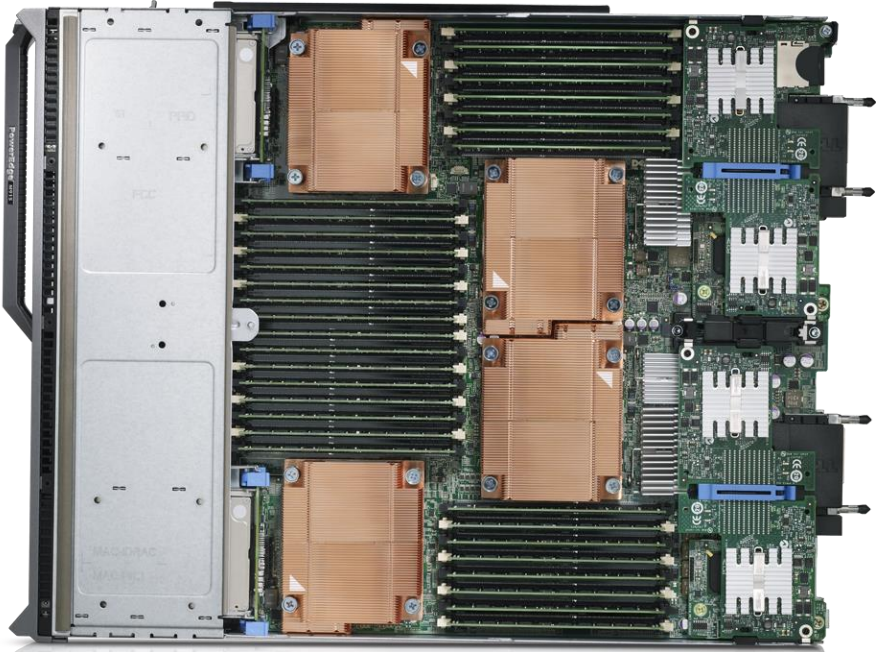


Figure 4. Internal chassis view

Rails and cable management

See the [PowerEdge M1000e Technical Guide](#).

Chassis view

Figure 5 shows the M915 mounted in the PowerEdge M1000e chassis.



Figure 5. M1000e chassis

Fans

For detailed information, see the *Dell PowerEdge Modular Systems Hardware Owner's Manual* on Dell.com/Support/Manuals.

Cabling

For detailed information, see the *Dell PowerEdge Modular Systems Hardware Owner's Manual* or the *Rack Installation Guide* on Dell.com/Support/Manuals.

Control panel/LCD

For detailed information, see the *Dell PowerEdge Modular Systems Hardware Owner's Manual* on Dell.com/Support/Manuals.

Security

The M915 offers a configurable client IP address range for clients connecting to iDRAC6. For additional information regarding the PowerEdge M915 security features, see the *Dell PowerEdge Modular Systems Hardware Owner's Manual* on Dell.com/Support/Manuals.

Cover latch

The blade module includes a latch for the cover. See the Opening and Closing the Blade section in the Installing Blade Components chapter in the *Dell PowerEdge Modular Systems Hardware Owner's Manual* on Dell.com/Support/Manuals for more information.

TPM (Trusted Platform Module)

The TPM is used to generate/store keys, protect/authenticate passwords and create/store digital certificates. TPM can also be used to enable the BitLocker™ hard drive encryption feature in Microsoft Windows Server 2008. TPM is enabled through a BIOS option and uses HMAC-SHA1-160 for binding. TCM is available in China.

Power off security

Through the Chassis Management Controller (CMC), the front blade server USB ports and power button can be disabled so as to not allow any control of the system from the front of the blade.

USB Key

The M915 provides an internal USB connector for a USB flash memory key. The USB memory key can be used as a boot device, security key, or mass storage device.

Battery

A replaceable coin cell CR2032 3V battery is mounted on the planar to provide backup power for the Real-Time Clock and CMOS RAM.

Field replaceable units (FRU)

The planar contains a serial EEPROM to contain FRU information including Dell part number, part revision level and serial number.

User accessible jumpers, sockets and connectors

For information, see the System Board Information chapter in the *Dell PowerEdge Modular Systems Hardware Owner's Manual* on Dell.com/Support/Manuals.

5 Power, thermal and acoustics

Power supplies

See the [PowerEdge M1000e Technical Guide](#) for information on power supplies and power supply specifications.

Power efficiency

One of the main features of blade servers is enhanced power efficiency. The M915 achieves higher power efficiency by implementing the following features:

- User-configurable power options with the M1000e CMC (see M1000e documentation online at Dell.com/Support/Manuals for further details)
- Improved power budgeting
- VR efficiency improvements (using switching regulators instead of linear regulators)
- Closed-loop thermal throttling
- Use of LV DDR3 memory (lower voltage compared to DDR2)
- BIOS Power/Performance options page
- Active Power Controller (BIOS-based CPU P-state manager)
- Ability to throttle memory
- Ability to disable a processor core
- Ability to turn off embedded NICs or PCIe lanes when not being used
- Energy Smart components at the M1000e chassis level to selectively enable more computing performance with less power consumption.

Environmental specifications

Table 3. Environmental specifications

Temperature	
Operating	10°C to 35°C (50°F to 95°F) with a maximum temperature gradation of 10°C per hour Note: For altitudes above 2950 feet, the maximum operating temperature is derated 1°F/500 ft
Storage	–40°C to 65°C (–40°F to 149°F) with a maximum temperature gradation of 20°C per hour
Relative Humidity	
Operating	20% to 80% (non-condensing) with a maximum humidity gradation of 10% per hour
Storage	5% to 95% (non-condensing) with a maximum humidity gradation of 10% per hour
Maximum Vibration	
Operating	0.26Grms at 5–350Hz in operational orientations
Storage	1.54Grms at 10–250Hz in all orientations

Maximum Shock	
Operating	Half sine shock in all operational orientations of 31G +/- 5% with a pulse duration of 2.6ms +/- 10%
Storage	Half sine shock on all six sides of 71G +/- 5% with a pulse duration of 2 ms +/- 10%
Altitude	
Operating	-15.2 m to 3048 m (-50 ft to 10,000 ft) Note: For altitudes above 2950 ft, the maximum temperature is derated 1°F/550 ft
Storage	-16 m to 10,600 m (-50 ft to 35,000 ft)
Airborne contaminant level	
Class G1 or lower as defined by ISA-S71.04-1985 (G1 maximum corrosive contaminant levels measured at ≤ 50% relative humidity)	

ENERGY STAR compliance

ENERGY STAR® qualified configurations can be accessed from the [ENERGY STAR Compliance results](#) landing page on Dell.com.

Thermal

The Dell PowerEdge M915 is the first blade to support ≥130W processors in a four-socket configuration. Larger heat sinks provide increased cooling capability, which enables four-socket 140W configurations without restrictions on external ambient temperature.

The M915 thermal solution includes the following features:

- Optimized airflow impedance for individual blade and chassis-level airflow balancing
- Custom top cover air baffling prevents DIMM airflow bypass to balance airflow and maintain proper DIMM cooling
- Custom-designed heat sinks maintain processor and chipset temperatures within thermal design targets
- Highly optimized fan control algorithm:
 - Base fan speeds are a function of hardware configuration and ambient temperature to minimize airflow for a given environment
 - PID fan control algorithms are used for processors, DIMMs and NDC I/O thermal sensors to maintain appropriate thermal margin while minimizing component over-cooling
 - NDC I/O sensor algorithm allows for lower fan speeds by sensing the air temperature near the exhaust of the blade while maintaining proper airflow and cooling for the mezzanine cards
 - The highest fan-speed request from the above algorithms is used to set the appropriate fan speed for the blade
 - The ambient and hardware configuration sets the minimum fan speed — other algorithms increase fan speed as needed to maintain proper cooling

Acoustics

Table 4 shows the acoustical performance for a typical configuration of the M1000e chassis with four PowerEdge M915 blade servers installed. Acoustical performance varies with hardware configurations.

Table 4. Acoustical performance of M1000e chassis with four M915 blades installed

Typical Configuration (per blade) at 23±2°C Ambient in M1000e Chassis				Operating Mode	LwA-UL (bels)
Processors	Hard Drives	DIMMs	Mezzanine Cards		
4 x AMD 6174 (115W)	2 x 2.5" SAS (15K) 146GB	8 x 8GB	4	Standby	7.1
				Idle	8.4
				Processor Active	8.4

Definitions

Standby: AC power is connected to power supplies but the system is not turned on.

Idle: Reference ISO7779 (1999) definition 3.1.7; system is running in its OS but no other specific activity.

Processor active: An operating mode per ISO7779 (1999) definition 3.1.6; a program is run to simulate utilization of processor in general applications.

LwA–UL: The upper limit sound power level (LwA) calculated per section 4.4.2 of ISO 9296 (1988) and measured in accordance to ISO 7779 (1999).

6 Processors

Overview

AMD Opteron 6100, 6200 and 6300 series processors (G34) are designed specifically for high-end server applications. The G34 processor features up to twelve-core processing to maximize performance and performance/watt for data center infrastructures and highly dense deployments. The G34 processor also features AMD Opteron micro-architecture and AMD64 architecture for flexibility in 64-bit and 32-bit applications and operating systems.

The G34 processor uses a 1944-contact Organic Land Grid Array (OLGA) package that plugs into a surface mount socket (Socket-G34). The Dell PowerEdge M915 provides support for two and four G34 processors.

Table 5. AMD Opteron 6100, 6200 and 6300 series processors

G34 processor	Features
Cache size	L1 128K/core L1 128K/core L2 512K/core L3 12MB
Multi-processor support	1–4 processors
Package	OLGA 1944

Features

Key features of the G34 processor include:

- Up to twelve cores per processor (two dies per processor package)
- Four point-to-point HyperTransport (HT3) links at 6.4 GT/s (at 3.2GHz)
- 1944-pin OLGA (Organic Land Grid Array) package
- 45 nm process technology
- Up to 24MB shared L3 cache
- No termination required for non-populated CPUs (must populate CPU socket 1 first)
- Two integrated DDR3 memory controllers
- Compatible with existing x86 code base
- Instruction sets like MMX, SSE, SSE2, SSE3, 3DNow!, AMD64
- Support for HT Assist
- Enhanced AMD-V™ and IOMMU Technology for virtualization support
- Enhanced AMD power efficiency features:
 - Enhanced AMD PowerNow!™
 - CoolCore™ Technology
 - Hardware Thermal Control (HTC)
- Demand-based switching for active CPU power management as well as support for ACPI P-states and C-states
 - C1E support

- Cool Speed
- BIOS allows the user to disable or enable processor cores. The cores will remain as defined after a reboot.

AMD Opteron 6200 series processors

AMD Opteron 6200 series processors feature the following:

- The processor frequency drops to 500MT/s when the system is idle to reduce power consumption.
- Application Power Management: The Thermal Design Power (TDP) of the processor denotes its power consumption. This feature optimizes system power consumption.
- Performance Monitoring Counters: The Northbridge P-states (performance states) allow more users to access the performance monitor counters at the same time. This feature reduces power consumption and optimizes performance within the specified TDP.
- Low Voltage Memory Modules (DDR3L DIMMs): The Opteron 6200 series processors support DDR3L DIMMs at a lower operating voltage of 1.35V.
- Support for AMD Turbo Core technology.

AMD Opteron 6300 series processors

AMD Opteron 6300 series processors feature the following:

- Improved TCO with higher performance, better performance/watt and better price/performance than the previous generation
- Enhanced power efficiency, running applications faster with the same power budget
- Improved performance and performance/watt (compared to prior generations) for multi-threaded environments like virtualization, database and web serving
- Reduced power costs at low usage
- Investment protection from leveraging current socket platform
- Ideal for servers needing performance and scalability, such as application and database servers in the cloud, large virtualization and HPC
- 1/2/4 socket support
- 4, 8, 12, 16 cores
- Four memory channels

Supported processors

For the latest information on supported processors for the PowerEdge M915, visit Dell.com.

Table 6. Supported AMD Opteron 6100 series processors

Model	Speed	Power	Cache	Cores
6180SE	2.5GHz	140W	12MB	12
6176	2.3GHz	115W	12MB	12
6174	2.2GHz	115W	12MB	12
6172	2.1GHz	115W	12MB	12

Model	Speed	Power	Cache	Cores
6168	1.9GHz	115W	12MB	12
6166HE	1.8GHz	85W	12MB	12
6164HE	1.7GHz	85W	12MB	12
6140	2.6GHz	115W	12MB	8
6136	2.4GHz	115W	12MB	8
6134	2.3GHz	115W	12MB	8
6128	2.0GHz	115W	12MB	8
6132HE	2.2GHz	85W	12MB	8
6128HE	2.0GHz	85W	12MB	8
6124HE	1.8GHz	85W	12MB	8

Table 7. Supported AMD Opteron 6200 series processors

Model	Speed	Power	Cache	Cores
6282SE	2.6GHz	140W	16MB	16
6276	2.3GHz	115W	16MB	16
6274	2.2GHz	115W	16MB	16
6272	2.1GHz	115W	16MB	16
6238	2.6GHz	115W	16MB	12
6234	2.4GHz	115W	16MB	12
6220	3.0GHz	115W	16MB	8
6212	2.6GHz	115W	16MB	8
6204	3.3GHz	115W	16MB	4
6262HE	1.6GHz	85W	16MB	16

Table 8. Supported AMD Opteron 6300 series processors

Model	Speed	Power	Cache	Cores
6386SE	2.8GHz	140W	16MB	16
6380	2.5GHz	115W	16MB	16
6378	2.4GHz	115W	16MB	16
6376	2.3GHz	115W	16MB	16
6348	2.8GHz	115W	16MB	12
6344	2.6GHz	115W	16MB	12
6328	3.2GHz	115W	16MB	8
6320	2.8GHz	115W	16MB	8
6308	3.5GHz	115W	16MB	4
6366HE	1.8GHz	85W	16MB	16

Processor configurations

The PowerEdge M915 supports four G34 sockets with two- and four-processor configurations (85W, 115W and 140W). A single processor can be used to boot for diagnostic purposes.

Processor installation

For instructions on installing processors, see the *Dell PowerEdge Modular Systems Hardware Owner's Manual* on Dell.com/Support/Manuals.

7 Memory

Overview

The Dell PowerEdge M915 uses DDR3 memory, providing a high performance, high-speed memory interface capable of low latency response and high throughput. The platform supports registered ECC DDR3L DIMMs (LV RDIMM). The M915 memory system supports up to 32 DIMMs.

DIMMs supported

- The M915 memory interface uses 1GB, 2GB, 4GB, 8GB, 16GB and 32GB DIMMs. UDIMMs are not supported.

DIMM slots

The M915 has 32 DIMM slots, organized in four channels per processor. The first DIMM slot in each channel is color-coded with white ejection tabs for ease of installation. The DIMM sockets are placed 400 mils (11 mm) apart, center-to-center in order to provide enough space for sufficient airflow to cool stacked DIMMs.

DIMM population guidelines

The DDR3 memory interface consists of four memory channels per processor socket. Each channel supports up to two LV RDIMMs for single-rank, dual-rank and quad-rank DIMMs. Each channel is capable of supporting up to two DDR3 memory modules.

For optimal performance, the following memory configuration rules should be observed:

- Memory modules must be installed in pairs, beginning with the first two sockets in each set of memory modules. These sockets are marked by white retention levers.
- The memory configuration for each processor must be identical.
- Memory modules in corresponding slots must be identical in size, speed and technology.
- If quad-rank memory modules are mixed with single-rank or dual-rank modules, the quad-rank modules must be installed in the sockets with the white release levers.
- If pairs of memory modules of different sizes are installed, the larger capacity memory modules must be in the lower numbered slots.
- DIMMs must be installed in each channel starting with the DIMM farthest from the processor (DIMM 1).

Population order is identified by the silkscreen designator and the System Information Label (SIL) located on the chassis cover.

System performance can be affected if memory configurations do not conform to the preceding installation guidelines. The system may issue an error message during start-up that the configuration is non-optimal.

Memory speed

The memory frequency is determined by a variety of inputs:

- Each processor has four DDR3 channels capable of supporting speeds up to 1600MT/s.
- Single-rank, dual-rank and mixed single- and dual-rank DIMM types can support speeds up to 1600MT/s.

- Quad-rank DIMM types can support speeds up to 1333MT/s.
- If DIMMs of different speeds are mixed, all channels will operate at the fastest common frequency.

Sparing

Memory sparing (spare bank) is supported in certain configurations with 32 memory modules installed. If online sparing is enabled, identical DIMMs must be installed in the same slots across each channel. The memory sparing feature must be enabled in the Memory Information screen in the System Setup programs. To use memory sparing, node interleaving must be disabled.

For more information on memory sparing, see the *Dell PowerEdge Modular Systems Hardware Owner's Manual* on Dell.com/Support/Manuals.

Mirroring

Memory mirroring is not supported.

Memory scrubbing

The M915 memory interface supports memory scrubbing (sequential or redirection) and patrol scrubbing, single-bit correction, and multi-bit error detection. The failure of an x4 DRAM device results in errors to one ECC symbol and can be corrected (chipkill). The failure of an x8 DRAM device results in errors to two ECC symbols and can be detected but cannot be corrected.

8 Chipset

Overview

The Dell PowerEdge M915 chipset has a dual I/O Bridge (IOB) configuration with AMD SR5670 IO bridges and the SP5100 Southbridge. The SR5670 is designed to support AMD's G34 processor family, HyperTransport 3 Interface (2.6 GHz), DDR3 memory technology and PCIe 2.0.

AMD I/O bridges

The PowerEdge M915 I/O board uses two AMD SR5670 IOBs to provide links between the G34 processor(s) and I/O components. The main components of the I/O controllers are configured to use two x16 HyperTransport 3 link (to CPU1 and CPU2), up to 52 lanes of PCIe 2.0, a x4 PCIe 1.0 Southbridge Interface (SB Link) and an integrated IOAPIC. CPU1 has direct HT3 link to IOB1 and CPU2 has direct HT3 link to IOB2. IOB1 has the Southbridge interface.

HyperTransport 3 (HT-3)

The HyperTransport 3 (HT-3) consists of serial point-to-point interconnects for the processors and the I/O bridges. PowerEdge M915 has a total of four HT-3 links per processor, which allows interconnecting each processor and an option for I/O bridge. Each I/O bridge has a single x16 HT-3 link. A full Link consists of 16 lanes (full-width) in each direction with a link speed of 6.4 GT/s. The HT-3 clocking for CPU HT-3 and IOB HT-3 are 3.2GHz and 2.6GHz, respectively. Therefore, the IOB HT-3 link is capable of 5.2 GT/s. For routing, the HT-3 links are grouped by x8 Command Address (CAD), x1 Control (CTL), and x1 Clock (CLK) for each RX and TX directions.

Southbridge link interface

The SB Link connects the SR5670 IOB with the AMD Southbridge SP5100. The SB Link (A-Link Express) is equivalent to an x4 PCIe 1.0 link with a transfer rate of 1GBps in each direction.

AMD SP5100 Southbridge

The AMD SP5100 is a highly integrated Southbridge controller, supporting the following functions:

- PCI Bus 32-bit Interface Rev 2.3 running at 33MT/s
- Serial ATA (SATA) ports with transfer rates up to 300MB/s
- Five OHC (full-speed 1.1) and two EHCI (high-speed 2.0) USB host controllers, with up to 12 USB general purpose ports and 2 USB embedded ports. (The PowerEdge M915 uses eight of these ports for internal and external use from the general purpose ports.)
- Power management interface (ACPI 3.0b compliant)
- Integrated Micro Controller (IMC) and thermal management. (The iDRAC interfaces the Hardware Thermal Control [HTC] on PowerEdge M915, not the SP5100.)
- I/O interrupt controller
- SMBus 2.0 controller
- Low Pin Count (LPC) interface to Super I/O, Trusted Platform Module (TPM), and SPI-VU
- Serial Peripheral Interface (SPI) support for up to two devices (A 4MB BIOS flash is connected to the SP5100 using SPI interface.)

PCIe mezzanine connectors

The M915 supports four x8 PCIe 2.0 mezzanine connectors. The M915 does not support quad-port GbE mezzanine cards, because the M915 mezzanine cannot be bifurcated into two x4 PCIe lanes.

9 BIOS

Overview

The M915 BIOS is based on the Dell BIOS core and supports the following features:

- G34 support
- Simultaneous Multi-Threading (SMT) support
- PCI 2.3 compliant
- Plug-and-play 1.0a compliant
- MP (Multiprocessor) 1.4 compliant
- Ability to boot from hard drive, optical drive, iSCSI drive, USB key and SD card
- ACPI support
- PXE and WOL support for on-board NICs
- Memory sparing support
- SETUP access through <F2> key at end of POST
- USB 2.0 (USB boot code is 1.1 compliant)
- F1/F2 error logging in CMOS
- Virtual KVM, CD and floppy support
- Unified Server Configurator (UEFI 2.1) support
- Power management support, including DBS, Power Inventory and multiple Power Profiles

The PowerEdge M915 BIOS does not support the following:

- BIOS language localization
- BIOS recovery after bad flash

Supported ACPI states

- Supported ACPI system states include S0, S4 (OS) and S5. The M915 supports the standard ACPI states (see ACPI.info).

10 Embedded LAN on motherboard (LOM)

PCIe network daughtercards

The Dell PowerEdge M915 is designed to support two network daughtercards:

- 2 x 1GbE dual Broadcom BCM5709S
- 2 x 10GbE Broadcom BCM57712

Broadcom BCM5709S

The embedded Broadcom BCM5709S dual-port LAN controllers are located on the M915 network daughtercard. The following features are supported:

- x4 PCIe 2.0 capable interface
- Integrated MAC and PHY
- 3072x18 Byte context memory
- 64KB receive buffer
- TCP Offload Engine (TOE)
- iSCSI Offload Engine (iSOE)
- Network Controller-Sideband Interface (NC-SI) connection for Flex Addressing
- Wake-On-LAN (WOL)
- PXE 2.0 remote boot
- iSCSI boot
- IPv4 and IPv6 support
- Bare-metal deployment support

Broadcom BCM57712

A Broadcom BCM57712 C-NIC powers the Broadcom 2 x 10GbE network daughtercard and supports TOE, iSOE and fibre channel over Ethernet (FCoE). The following additional features are supported:

- x8 PCIe 2.0 host interface
- Broadcom BCM8073 KR PHY for 10GbE and GbE connectivity
- DCB support
- NC-SI connection for Flex Addressing
- Wake-On-LAN (WOL)
- PXE 2.1 remote boot
- iSCSI boot
- FCoE boot
- IPv4 and IPv6 support
- Bare-metal deployment support
- Optional PCI partitioning providing 8 PFs

- SR-IOV
- Energy Efficient Ethernet support

11 I/O mezzanine card options

Overview

The Dell PowerEdge M915 contains four PCIe 2.0 mezzanine slots. Installation of mezzanine cards requires an M1000e I/O Module (IOM) of the same fabric technology to be installed in the corresponding fabric slot of the mezzanine to support data flow through that fabric/slot. For more information, see the [PowerEdge M1000e Technical Guide](#).

Options

Available options for all four mezzanine slots include:

- Mellanox QDR ConnectX Dual-Port Quad Data Rate (QDR) InfiniBand
- Broadcom BCM57711 Dual Port KX4 MC (10G)
- Broadcom BCM5709S Dual Port SERDES
- Intel Dual Port 10G KX4 MC
- Dual Port FC8 QLogic QME2572
- Dual Port FC8 Emulex LPe1205-M
- QLogic CNA QME8142 (Enhanced 10GbE + FCoE)
- Emulex CNA OCM20102FM (Enhanced 10GbE)
- Intel 52599 (Enhanced 10GbE)

The M915 does not support 4x1 (quad-port) Ethernet mezzanine cards.

12 Storage

Drives

The Dell PowerEdge M915 supports up to two 2.5" SSD or SAS hard disk drives. See Table 9 for information on supported hard drives. For the most up-to-date information on supported hard drives, visit Dell.com/PowerEdge.

Table 9. Supported hard drives

Form factor	Capacity	Speed	Type
2.5"	50GB, 100GB, 200GB, 400GB	N/A	SATA SSD
2.5"	73GB, 146GB	15K	SAS
2.5"	146GB, 300GB, 600GB, 900GB, 1.2TB	10K	SAS

Hard disk drive carriers

The M915 supports the Dell eleventh-generation 2.5" hard drive carrier (see Figure 6). Legacy carriers are not supported on the M915.



Figure 6. 2.5" Hard drive carrier

Empty drive bays

For the slots that are not occupied by drives, a carrier blank is provided to maintain proper cooling, to maintain a uniform appearance to the unit and to provide EMI shielding.

Diskless configuration support

The system supports diskless configuration with no storage controller (PERC H200 or PERC H700) installed in the system. A 2.5" HDD backplane is still installed in this configuration.

RAID configurations

Table 10. Factory RAID configurations

Configuration	Hot-plug	Min. HD	Max. HD	Description
ZERO	No	0	0	Diskless configuration, no daughtercard
ASSN	No	1	2	SAS drives using PERC H200 with no RAID
ASSR0	No	2	2	SAS drives using PERC H200 with drives in RAID 0 stripe
ASSR1	Yes	2	2	SAS drives using PERC H200 with drives in RAID 1 mirror
ASSCBRO	No	2	2	SAS or Solid State drives using the PERC H700 (with battery) with drives in RAID 0 stripe
ASSCBR1	Yes	2	2	SAS or solid-state drives using PERC H700 (with battery) with drives in RAID 1 mirror

Storage controllers

Table 11. Supported storage controllers

Model	Interface support	PCIe support	SAS connectors	Cache memory size	Write back cache	RAID levels	Max. drive support	RAID support
PERC H700 Modular	6Gbps SAS	PCIe 2.0	1x4 internal	512MB	Yes (battery backup)	0, 1, 5, 6, 10	4	Hardware RAID
PERC H200 Modular	6Gbps SAS	PCIe 2.0	1x4 internal	—	—	0, 1, 10, supports non-RAID	4	Hardware RAID

PERC H200 Modular

The PERC H200 Modular card is an expansion controller that incorporates two four-channel 6Gbps SAS IOCs for connection to SAS hard disk drives. It is designed in a form factor that allows the same card to be used in other 11G blade server platforms.

PERC H700 Modular

The M915 also supports the PERC H700 Modular storage controller card with battery-backed cache. The PERC H700 card has its own processor with a PCIe 2.0 host interface and DDR2 memory.

SATA repeater

The M915 does not support the SATA repeater. The only SATA drives supported by M915 are the SSD drives, which are only supported with a PERC solution.

Optical drives

Optical drives are optional in all M915 systems and connect to the blade through the front USB interface. The following internal slim-line drives are available on the M915:

- DVD-ROM
- DVD+RW

PATA (IDE) optical drives are not supported.

External storage

A number of external storage options are available using the appropriate IOMs in the M1000e chassis and mezzanine card(s) in the M915 blade. See Dell.com/Storage for more information.

13 Video

The M915 Integrated Dell Remote Access Controller 6 (iDRAC6) incorporates an integrated video subsystem, connected to the 32-bit PCI interface of the AMD SP5100. This logic is based on the Matrox G200. The device only supports 2D graphics.

The integrated video core shares its video memory with the iDRAC6 128MB DDR2 application space memory. This memory is also used for the KVM buffer.

The M915 system supports the 2D graphics video modes shown in Table 12.

Table 12. Supported video modes

Resolution	Refresh rate (Hz)	Color depth (bit)
640 x 480	60, 72, 75, 85	8, 16, 32
800 x 600	56, 60, 72, 75, 85	8, 16, 32
1024 x 768	60, 72, 75, 85	8, 16, 32
1152 x 864	75	8, 16, 32
1280 x 1024	60, 75, 85	8, 16
1280 x 1024	60	32

14 Rack information

For information on rack and cable accessories for the Dell PowerEdge M915, see the [PowerEdge M1000e Technical Guide](#) and the [M1000e Rack and Cable Advisor Tool](#).

15 Operating systems

The Dell PowerEdge M915 is designed to meet the Microsoft WinLogo 3.0 design specifications. For the most up-to-date information, see the [Operating System Support Matrix for Dell PowerEdge Systems](#) on Dell.com.

16 Virtualization

Overview

Table 13 shows the supported and certified virtualization software for the Dell PowerEdge M915.

Table 13. Virtualization software

Operating systems	Factory install (FI)
VMware vSphere ESXi 4.0	FI
VMware ESXi 4.0 Update 2 Embedded Edition	FI
VMware ESXi 4.0 Update 2 Installable Edition	Download version (NFI, No DIB)
VMware ESXi 4.1 Update 1 Embedded Edition	FI
VMware ESXi 4.0 Update 1 Installable Edition	Download version (NFI, No DIB)

Dell.com/Support/Manuals has extensive information designed to help customers configure virtualization software with PowerEdge servers. The Dell Support site also has many blade-related virtualization documents, as well as a detailed list of the virtualization platforms that are supported by Dell OpenManage.

It is possible to order the M915 with an SD card that does not contain ESXi.

Advanced Infrastructure Manager by Scalent

Dell Advanced Infrastructure Manager (AIM) allows IT organizations to manage networking, storage and servers (as well as server workloads) that can be dynamically reconfigured and deployed to meet the changing needs of today's data center environment. Specifically, AIM provides IT professionals the ability to:

- Combine new and existing networking, storage devices and servers into a holistic computing solution that enables dynamic allocation of resources to meet application workload requirements.
- Manage physical and virtual resources with a single solution that includes the ability to move workloads seamlessly across hardware platforms for increased availability and scalability.
- Provide virtualization-like functionality to non-virtual (physical) servers, including automated failover, dynamic load balancing and business continuity.
- Integrate existing infrastructure (networking, storage devices and servers) into an AIM solution to provide investment protection and extend the useful life of existing data center assets.
- Significantly decrease the amount of time and people required to deploy hardware and get applications up and running by providing a repeatable, scalable framework for hardware implementation using AIM.

More information can be found at Dell.com/AIM.

17 Systems management

Overview

Dell delivers open, comprehensive and integrated solutions that help you reduce the complexity of managing disparate IT assets. Combining Dell PowerEdge servers with a wide selection of Dell developed systems management solutions gives you choice and flexibility, so you can simplify and save in IT environments of any size. To help you meet your server management demands, Dell offers Dell OpenManage systems management solutions for:

- Deployment of one or many servers from a single console
- Monitoring of server and storage health and maintenance
- Update of system, operating system and application software

Dell offers IT management solutions for organizations of all sizes — priced and sized appropriately, and supported comprehensively.

Server management

A Dell Systems Management and Documentation DVD are included with the product. ISO images are also available. A brief description of available content:

- Dell Systems Build and Update Utility (SBUU): Dell Systems Build and Update Utility assists in OS install and pre-OS hardware configuration and updates.
- Server Update Utility (SUU): This DVD has an inventory tool for managing updates to firmware, BIOS and drivers for either Linux or Microsoft Windows varieties.
- OpenManage Server Administrator (OMSA): The OpenManage Server Administrator tool provides a comprehensive, one-to-one (one console to one server) systems management solution, designed for system administrators to manage systems locally and remotely over a network. OMSA allows system administrators to focus on managing their entire network by providing comprehensive one-to-one systems management.
- Active Directory Snap-in Utility: The Active Directory Snap-in Utility provides an extension snap-in to the Microsoft Active Directory. This allows you to manage Dell specific Active Directory objects. The Dell-specific schema class definitions and their installation are also included on the DVD.
- Dell Systems Service Diagnostics Tools: Dell Systems Service and Diagnostics tools deliver the latest Dell optimized drivers, utilities and operating system-based diagnostics that you can use to update your system.
- eDocs: The section includes PDF files for PowerEdge systems, storage peripherals and Dell OpenManage software.

Embedded server management

The PowerEdge M915 implements circuitry for the next generation of Embedded Server Management. It is Intelligent Platform Management Interface (IPMI) v2.0 compliant. The iDRAC (Integrated Dell Remote Access Controller) is responsible for acting as an interface between the host system and its management software and the periphery devices.

iDRAC6 provides features for managing the server remotely or in data center lights-out environments.

Advanced iDRAC features require the installation of the optional iDRAC6 Enterprise card.

Dell Lifecycle Controller and Unified Server Configurator

Embedded management is comprised of interdependent pieces:

- Dell Lifecycle Controller
- Unified Server Configurator
- iDRAC6

Dell Lifecycle Controller powers the embedded management features. It includes integrated and tamper-proof storage for system-management tools and enablement utilities (firmware, drivers, etc.). Lifecycle Controller enables pre-OS server deployment, OS installation, platform updates, platform configuration and diagnostic capabilities.

Dell Unified Server Configurator (USC) is a graphical user interface (GUI) that aids in local server provisioning in a pre-OS environment. To access the Unified Server Configurator, press the <F10> key within 10 seconds of the Dell logo appearance during the system boot process. Table 14 details current functionality enabled by the USC.

Table 14. Unified Server Configurator features and description

Feature	Description
Faster O/S installation	Drivers and the installation utility are embedded on system, so no need to scour Dell.com.
Faster system updates	Integration with Dell support automatically directed to latest versions of the Unified Server Configurator, iDRAC, RAID, BIOS, NIC and power supply.
Update rollback	Ability to recover to previous "known good state" for all updatable components.
More comprehensive diagnostics	Diagnostic utilities are embedded on system.
Simplified hardware configuration	Detects RAID controller and allows user to configure virtual disk and choose virtual disk as boot device, eliminating the need to launch a separate utility. Also provides configuration for iDRAC, BIOS and NIC/LOM.

Integrated Dell Remote Access Controller

The integrated Dell Remote Access Controller (iDRAC6) provides IT Administrators comprehensive yet straightforward management of remote servers, by delivering "as if you are there" presence and control. iDRAC6 helps users to save time and money by eliminating travel to the remote server(s), whether that server is located in a different room, a different building, a different city or in a different country.

iDRAC6 Enterprise is a standard feature on the M915; Virtual Flash (vFlash) media is a purchasable option.

iDRAC6 Enterprise

The iDRAC6 Enterprise card provides access to advanced iDRAC6 features. The iDRAC6 Enterprise connects directly to the M915 planar and is mounted parallel to the planar with stand-offs.

Key features for the iDRAC6 Enterprise include:

- Scripting capability with Dell's Racadm command-line
- Remote video, keyboard and mouse control with Virtual Console
- Remote media access with Virtual Media
- Dedicated network interface

iDRAC6 Enterprise with Virtual Flash (vFlash) Media

The iDRAC6 Enterprise can be upgraded by adding the vFlash media card. This is an 8 GB Dell-branded SD card that enables a persistent 256MB virtual flash partition. The vFlash media delivers the following key features:

- Support for 8GB SD storage media
- Can be used as a repository for a pre-OS image, eliminating the need to maintain a network infrastructure for OS deployment
- Can also be used for permanent diagnostics image for use after system failures or permanent failsafe image for periodic configuration changes

Table 15 shows a more detailed feature list for base management functionality, iDRAC6 Enterprise and vFlash media.

Table 15. Features list for base management functionality, iDRAC and vFlash Media

Feature	Base management functionality	iDRAC6 Enterprise	vFlash Media
Interface and standards support			
IPMI 2.0	✓	✓	✓
Web-based GUI		✓	✓
SNMP		✓	✓
WSMAN		✓	✓
SMASH-CLP		✓	✓
Racadm command-line		✓	✓
Conductivity			
Shared/Failover network modes	✓	✓	✓
IPv4	✓	✓	✓
VLAN tagging	✓	✓	✓
IPv6		✓	✓
Dynamic DNS		✓	✓
Dedicated NIC		✓	✓
Security and authentication			
Role-based authority	✓	✓	✓
Local users	✓	✓	✓

Feature	Base management functionality	iDRAC6 Enterprise	vFlash Media
Active directory		✓	✓
SSL encryption		✓	✓
Remote management and remediation			
Remote firmware update	✓	✓	✓
Server power control	✓	✓	✓
Serial-over-LAN (with proxy)	✓	✓	✓
Serial-over-LAN (no proxy)		✓	✓
Power capping		✓	✓
Last crash screen capture		✓	✓
Boot capture		✓	✓
Serial-over-LAN		✓	✓
Virtual media		✓	✓
Virtual console		✓	✓
Virtual console sharing		✓	✓
Virtual flash			✓
Monitoring			
Sensor monitoring and alerting	✓	✓	✓
Real-time power monitoring		✓	✓
Real-time power graphing		✓	✓
Historical power counters		✓	✓
Logging features			
System event log	✓	✓	✓
RAC log		✓	✓
Trace log		✓	✓

Chassis Management Controller (CMC)

See the [PowerEdge M1000e Technical Guide](#).

18 USB peripherals

The Dell PowerEdge M915 provides an internal USB connector for a USB flash memory key. The USB memory key can be used as a boot device, security key, or mass storage device. The M915 also supports an external USB DVD-ROM or DVD+RW.

Appendix A. Statement of volatility

The Dell PowerEdge M915 contains both volatile and non-volatile (NV) components. Volatile components lose their data immediately upon removal of power from the component. Non-volatile components continue to retain their data even after the power has been removed from the component. Components chosen as user-definable configuration options (those not soldered to the motherboard) are not included in the Statement of Volatility. Configuration option information (pertinent to options such as microprocessors, system memory, remote access controllers and storage controllers) is available by component separately. The NV components detailed in Table 16 are present in the PowerEdge M915 server.

Table 16. Volatility

Server BIOS memory	
Size:	4MB
Type: [Flash PROM, EEPROM]:	SPI Flash EEPROM
Can user programs or operating system write data to it during normal operation?	No
Purpose? [boot code]	There is boot code and application code. The code is vital to the system booting to the OS. Contains the BIOS code.
How is data input to this memory?	Flashed in the factory or using Dell flash utility.
How is this memory write protected?	Software write protected
System FRU	
Size:	256Kb
Type: [Flash PROM, EEPROM]:	Serial I2C EEPROM, nonvolatile
Can user programs or operating system write data to it during normal operation?	Yes. A user can enter a username and password which will be stored in the chip.
Purpose? [boot code]	This chip stores some system configuration information (system type, board PPID information)
How is data input to this memory?	I2C bus from the iDRAC6
How is this memory write protected?	Only the iDRAC6 can write to the chip
Server CMOS (complementary metal-oxide semiconductor) memory	
Size:	256 bytes
Type: [Flash PROM, EEPROM]:	CMOS
Can user programs or operating system write data to it during normal operation?	Using BIOS setup
Purpose? [boot code]	BIOS configurations
How is data input to this memory?	BIOS defaults, BIOS setup
How is this memory write protected?	NA
Remarks	RTC is inside SP5100 south bridge chip. Jumper on motherboard can be used to reset to factory default settings.

Network daughter card LOM memory	
Size:	4Mb
Type: [Flash PROM, EEPROM]:	Flash
Can user programs or operating system write data to it during normal operation?	Yes, under software control.
Purpose? [boot code]	Contains LOM boot code and config data
How is data input to this memory?	Requires vendor provided firmware file and loader program used during factory assembly or possible field update. A system loaded with arbitrary data in firmware memory would not operate.
How is this memory write protected?	Software control.
Network daughter card FRU and temperature sensor	
Size:	512bytes
Type: [Flash PROM, EEPROM]:	EEPROM
Can user programs or operating system write data to it during normal operation?	No
Purpose? [boot code]	Contains firmware for FRU and temperature sensor processing
How is data input to this memory?	Boot block is cable flashed only, FRU and temperature registers are accessed via iDRAC6 I2C.
How is this memory write protected?	Software control.
H200 SRAM	
Size:	128K Bytes
Type: [Flash PROM, EEPROM]:	Serial RAM
Can user programs or operating system write data to it during normal operation?	No
Does it retain data when powered off?	Yes
Purpose? [boot code]	Storage configuration data
How is data input to this memory?	Host controller through SDRAM bus
How is this memory write protected?	Software write protected
H200 Flash	
Size:	64Mb
Type: [Flash PROM, EEPROM]:	Flash
Can user programs or operating system write data to it during normal operation?	No
Does it retain data when powered off?	Yes
Purpose? [boot code]	H200 Firmware
How is data input to this memory?	Host controller
How is this memory write protected?	Software write protected

H200 EEPROM	
Size:	64KB
Type: [Flash PROM, EEPROM]:	EEPROM
Can user programs or operating system write data to it during normal operation?	Yes
Does it retain data when powered off?	Yes
Purpose? [boot code]	Store board manufacture information
How is data input to this memory?	I2C bus from iDRAC6
How is this memory write protected?	Only the iDRAC6 can write to the chip
Remarks	
EDID EEPROM	
Size:	2K
Type: [Flash PROM, EEPROM]:	EEPROM
Can user programs or operating system write data to it during normal operation?	no
Does it retain data when powered off?	Yes
Purpose? [e.g. boot code]	Stores current monitor information
How is data input to this memory?	I2C bus from iDRAC6
How is this memory write protected?	no
Server video memory	
Size:	64M x16
Type: [Flash PROM, EEPROM]:	DDR2 SDRAM
Can user programs or operating system write data to it during normal operation?	Yes
Purpose? [boot code]	Graphics Buffer
How is data input to this memory?	Normal Operation
How is this memory write protected?	No
CPLD	
Size:	Master CPLD: 2280 logic elements; 7.5Kbits RAM; 27.6Kbits EBR SRAM Slave CPLD: 1200 logic elements: 6.25Kbits RAM; 9.2Kbits EBR SRAM
Type: [Flash PROM, EEPROM]:	Programmable Logic Device
Can user programs or operating system write data to it during normal operation?	Yes (Customer can use DOS program to update CPLD image)
Purpose? [boot code]	Provide blade power sequencing and other blade control logic.
How is data input to this memory?	By way of specialized programming utilities used in the factory and possibly for field updates.
How is this memory write protected?	Software control.
Remarks	Two CPLDs: master and slave

HDD backplane firmware (SEP) memory	
Size:	32KB
Type: [Flash PROM, EEPROM]:	Flash
Can user programs or operating system write data to it during normal operation?	No. A special (not available to customers) DOS utility is needed to flash the application code, and the boot block is cable flashed only.
Purpose? [boot code]	Interface between the RAID controller and the hard drives as well as a controller for the HDD status LED.
How is data input to this memory?	Cable flash to flash entire chip or a special utility (not available to customers) to flash in DOS.
How is this memory write protected?	Software write protected. No hardware protection pin.
iDRAC6 Enterprise SPI Flash	
Size:	2MB
Type: [Flash PROM, EEPROM]:	SPI Flash
Can user programs or operating system write data to it during normal operation?	No
Purpose? [boot code]	There is boot code that is used by the iDRAC6 Enterprise management controller. Also contains the Life Cycle Log which contains server management data unique to the run-time events of the server itself.
How is data input to this memory?	Flashed in the factory or using Dell flash utility. Also written to by the iDRAC6 Enterprise controller to make Life Cycle Log (LCL) entries.
How is this memory write protected?	Software write protected

To obtain optional component information, please refer to the Dell Statement of Volatility for the individual components. Please direct any questions to your Dell Marketing contact.

Appendix B. Certifications

Regulatory certifications

Regulatory compliance certificates can be located at Dell.com/environmental_datasheets.

Product safety certifications

The product has been certified and bears the Mark, as applicable, of the Product Safety authorities as indicated in Table 17.

Table 17. Product safety certifications

Country/Region	Authority or Mark
Argentina	IRAM
Belarus	BELLIS
Canada	SCC
China	CNCA or CCC
Croatia	KONCAR
European Union	CE
Germany	TUV
IECEE	IECEE CB
Israel	SII
Kazakhstan	OTAN – CKT
Kenya	KEBS
Kuwait	KUCAS
Mexico	NYCE or NOM
Moldova	INSM
Nigeria	SONCAP
Norway	NEMKO
Russia	GOST
Saudi Arabia	KSA ICCP
South Africa	NRCS
Taiwan	BSMI
Ukraine	UKRTEST or UKRSERTCOMPUTER
United States	NRTL
Uzbekistan	STZ

Electromagnetic compatibility

The product has been certified and bears the Mark, as applicable, of the EMC authorities as indicated in Table 18.

Table 18. Electromagnetic compatibility certifications

Country/Region	Authority or mark	Class
Australia/New Zealand	ACMA or C-Tick	Class A
Belarus	BELLIS	Class A
Bosnia & Herzegovina, Montenegro, Serbia	KVALITET	Class A
Canada	ICES	Class A
China	CNCA or CCC	Class A
Croatia	KONCAR	Class A
European Union	CE	Class A
Israel	SII	Class A
Japan	VCCI	Class A
Kazakhstan	OTAN – CKT	Class A
Moldova	INSM	Class A
Norway	NEMKO	Class A
Russia	GOST	Class A
South Africa	SABS	Class A
South Korea	KCC	Class A
Taiwan	BSMI	Class A
Ukraine	UKRTEST or UKRSERTCOMPUTER	Class A
United States	FCC	Class A
Uzbekistan	STZ	Class A
Vietnam	ICT	Class A

Ergonomics, acoustics and hygienics

The product has been certified and bears the Mark, as applicable, of the ergonomics, acoustics and hygienics authorities as indicated in Table 19.

Table 19. Ergonomics, acoustics and hygienics

Country/Region	Authority or mark
Belarus	BELLIS
Germany	GS
Russia	GOST

Appendix C. Industry standards

The Dell PowerEdge M915 system conforms to the industry standards detailed in Table 20.

Table 20. Industry standards

Standard	URL for information and specifications
ACPI Advance Configuration and Power Interface Specification, v2.0c	acpi.info
Energy Star EPA Version 1.0 of the Computer Server Specification	energystar.gov/index.cfm?c=archives.enterprise_servers
Ethernet IEEE 802.3-2005	standards.ieee.org/getieee802/802.3.html
IPMI Intelligent Platform Management Interface, v2.0	intel.com/design/servers/ipmi
DDR3 Memory DDR3 SDRAM Specification, Rev. 3A	jedec.org/download/search/JESD79-3C.pdf
LPC Low Pin Count Interface Specification, Rev. 1.1	developer.intel.com/design/chipsets/industry/lpc.htm
PCI Express PCI Express Base Specification Rev. 2.0	pcisig.com/specifications/pciexpress
PMBus Power System Management Protocol Specification, v1.1	pmbus.info/specs.html
SAS Serial Attached SCSI, v1.1	t10.org
SATA Serial ATA Rev. 2.6; SATA II, SATA 1.0a Extensions, Rev. 1.2	sata-io.org
SMBIOS System Management BIOS Reference Specification, v2.6	dmtf.org/standards/smbios/
TPM Trusted Platform Module Specification, v1.2	trustedcomputinggroup.org
UEFI Unified Extensible Firmware Interface Specification, v2.1	uefi.org/specifications

Standard	URL for information and specifications
USB Universal Serial Bus Specification, Rev. 2.0	usb.org/developers/docs
Windows Logo Windows Logo Program System and Device Requirements, v3.10	microsoft.com/whdc/winlogo/hwrequirements.msp