


X11DPT-B (For SuperServer Only)

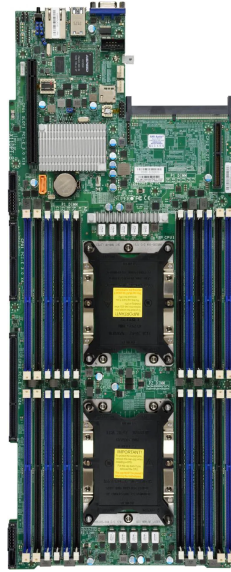

Key Features

2nd Gen Intel® Xeon® Scalable Processors and Intel® Xeon® Scalable Processors,
Dual Socket LGA-3647 (Socket P) supported, CPU TDP support Up to 205W TDP, 2 UPI up to 10.4 GT/s
Intel® C621
Up to 6TB 3DS ECC RDIMM, DDR4-2933MHz; Up to 6TB 3DS ECC LRDIMM, DDR4-2933MHz
Or 6TB DCPMM, DDR4-2666MHz, in 24 DIMM slots;
Up to 6TB Intel® Optane™ DC Persistent Memory in memory mode (Cascade Lake only);
1 PCIe 3.0 x16 Left Riser Slot,
1 PCIe 3.0 x16 Right Riser Slot
1 PCIe 3.0 x24 Proprietary Slot (for Supermicro storage add-on card),
x000D 1 PCIe 3.0 x16 SIOM LAN Networking Slot,
x000D 1 PCIe 3.0 x8 Proprietary Slot (For M.2 add-on card)
Intel® C621 controller for SATA3 (6 Gbps) ports; RAID 0,1,5,10
1 VGA port
Single LAN with
Networking options provided via SIOM module

Optimized Servers

[SYS-2029BT-DNC0R](#)

[SYS-2029BT-HNC0R](#)

[SYS-2029BT-HNC1R](#)

[SYS-2029BT-HNR](#)

[SYS-2029BT-HNTR](#)

[SYS-2029BT-HTR](#)

[SYS-6029BT-DNC0R](#)

[SYS-6029BT-HNC0R](#)

Specifications

Product SKUs**MBD-X11DPT-B****Physical Stats****Form Factor**

Proprietary Twin

Dimension

7.62" x 18.86" (19.35cm x 47.9cm)

Processor**CPU**

2nd Gen Intel® Xeon® Scalable Processors and Intel® Xeon® Scalable Processors

Dual Socket LGA-3647 (Socket P) supported, CPU TDP supports Up to 205W TDP, Dual UPI up to 10.4 GT/s

Core

Up to 28 cores

Note

BIOS version 3.0a or above is required to support 2nd Generation Intel Xeon Scalable Processors-SP

BIOS version 3.0a or above is required to support 2nd Generation Intel Xeon Scalable Processors-SP

BIOS version 3.2 or above is required to support 2nd Gen Intel® Xeon® Scalable processors (codenamed Cascade Lake-R)

System Memory**Memory Capacity**

24 DIMM slots

Up to 6TB Intel® Optane™ Persistent Memory 200 Series, DDR4-2666MHz

Up to 6TB 3DS ECC LRDIMM, DDR4-2933MHz; Up to 6TB 3DS ECC RDIMM, DDR4-2933MHz

Up to 6TB Intel® Optane™ DC Persistent Memory in memory mode (Cascade Lake only)

Memory Type

2933/2666/2400/2133 MT/s ECC DDR4 LRDIMM (3DS), RDIMM (3DS)

DIMM Sizes

LRDIMM: 64GB

RDIMM: 64GB

Memory Voltage

1.2V

Error Detection

Corrects single-bit errors

Detects double-bit errors (using ECC memory)

On-Board Devices**Chipset**

Intel® C621

SATA

Intel® C621 controller for SATA3 (6 Gbps) ports; RAID 0,1,5,10

IPMI

ASPEED AST2500

Graphics

1 ASPEED AST2500 BMC port(s)

Network Controllers

Single LAN, Networking options provided via SIOM module

Input / Output**SATA**

8 SATA3 (6Gbps) port(s)

USB

2 USB 3.0 port(s) (2 rear)

Video Output

1 VGA port(s)

DOM

1 SuperDOM (Disk on Module) power connector

TPM

1 TPM Header

Expansion Slots**PCIe**

1 PCIe 3.0 x16 Left Riser Slot,

1 PCIe 3.0 x16 Right Riser Slot

1 PCIe 3.0 x24 Proprietary Slot (for Supermicro storage add-on card),

1 PCIe 3.0 x16 SIOM LAN Networking Slot,

1 PCIe 3.0 x8 Proprietary Slot (For M.2 add-on card)

System BIOS**BIOS Type**

AMI UEFI

Management**Software**SuperDoctor® 5, [SUM](#), KVM with dedicated LAN, [SPM](#), Intel® NodeManager, [SSM](#), [IPMI2.0](#), Watchdog**Power Configurations**

ACPI Power Management

PC Health Monitoring**Voltage**

Monitors CPU voltages, Chipset Voltage, 1.05 (PCH), +5V standby, +5V, +3.3V, +12V, +1.8V, Memory Voltages

LED

UID/Remote UID

BMC/IPMI Heartbeat LED

Temperature

Monitoring for CPU and chassis environment

CPU thermal trip support

FAN

2x 4-pin fan headers (up to 2 fans)

PWM fan speed control

Other Features

WOL, UID, RoHS, Node Manager Support, CPU thermal trip support for processor protection, Chassis intrusion detection, SDDC

Operating Environment**Operating Temperature Range**

10°C - 35°C (50°F - 95°F)

Non-Operating Temperature Range

-40°C - 70°C (-40°F - 158°F)

Operating Relative Humidity Range

8% - 90% (non-condensing)

Non Operating Relative Humidity Range

5% - 95% (non-condensing)

Parts List

Optional Parts

TPM security module (optional, not included)

Part Number	AOM-TPM-9671H	AOM-TPM-9671V	AOM-TPM-9670V	AOM-TPM-9670H
Qty	1	1	1	1
Description	SPI capable TPM 1.2 with Infineon 9670 controller with horizontal form factor	SPI capable TPM 1.2 with Infineon 9670 controller with vertical form factor	SPI capable TPM 2.0 with Infineon 9670 controller with vertical form factor	SPI capable TPM 2.0 with Infineon 9670 controller with horizontal form factor
