


# X11SSW-4TF

---

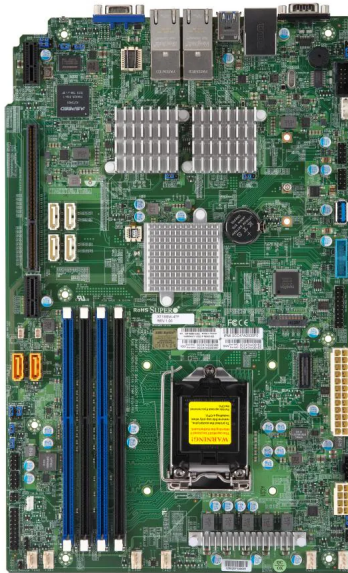

## Intel® QSV & VHD with GT2

### Key Features

Single socket H4 (LGA 1151) supports Intel® Xeon® processor E3-1200 v6/v5, Intel® 7th/6th Gen. Core™ i3 series, Intel® Celeron® and Intel® Pentium®

Intel® C236 chipset

Support Intel® VHD with selected CPU

Up to 64GB Unbuffered ECC UDIMM DDR4 2400MHz; 4 DIMM slots

M.2 NGFF connector

**M.2 Interface:** PCIe 3.0 x4

Form Factor: 2260, 2280, 22110

Key: M-Key

6 SATA3 (6Gbps) via C236; RAID 0, 1, 5, 10

Quad LAN w/ Intel® X540 10GBase-T

I/O: 1 VGA, 2 COM, TPM header

2 SuperDOM with built-in power

5 USB 3.0 (2 rear, 2 via header(s), 1 Type A),

6 USB 2.0 (2 rear, 4 via header(s))

### Optimized Servers

[SYS-5019S-W4TR](#)

# Specifications

**Product SKUs - Discontinued SKU (EOL). Please contact sales-rep for replacement SKUs.****MBD-X11SSW-4TF****Physical Stats****Form Factor**

Proprietary

**Dimension**

8" x 13" (20.32cm x 33.02cm)

**Processor****CPU**

Intel® Celeron®, Intel® Pentium®, Intel® 7th/6th Generation Core i3 series, Intel® Xeon® processor E3-1200 v6/v5

Single Socket LGA-1151 (Socket H4) supported, CPU TDP supports Up to 80W TDP

**Note**

BIOS version 2.0 or above is required to support 7th Generation Intel® Core™ i3 Processors and Intel® Xeon® Processor E3-1200 v6 series

**System Memory****Memory Capacity**

4 DIMM slots

64GB Unbuffered ECC UDIMM, DDR4-2400MHz

**Memory Type**

2400/2133/1866/1600 MT/s SDRAM 72-bit, 288-pin gold-plated DIMMs SDRAM 72-bit, 288-pin gold-plated DIMMs

**DIMM Sizes**

4GB, 8GB, 16GB

**Memory Voltage**

1.2V

**Error Detection**

Corrects single-bit errors

**On-Board Devices****Chipset**

Intel® C236

**SATA**

Intel® C236 controller for 6 SATA3 (6 Gbps) ports; RAID 0,1,5,10

**IPMI**

ASPEED AST2400 BMC

**Graphics**

1 ASPEED AST2400 BMC port(s)

**Network Controllers**

Quad LAN with Intel® X540 10GBase-T Ethernet Controller

**Input / Output****SATA**

6 SATA3 (6Gbps) port(s)

**LAN**

4 RJ45 10GBase-T ports

**USB**

3 USB 3 port(s) (1 Type A; 2 via header)

6 USB 2.0 port(s) (4 via header; 2 rear)

2 USB 3.0 port(s) (2 rear)

**Video Output**

1 VGA port(s)

**Serial Port**

2 COM Port(s) (1 header; 1 rear)

**DOM**

2 SuperDOM (Disk on Module) power connector

**TPM**

1 TPM Header

**Expansion Slots****PCIe**

1 PCIe 3.0 x16 Left Riser Slot

**M.2**

M.2 Interface: PCIe 3.0 x4

Form Factor: 22110, 2280, 2260

Key: M-Key

**System BIOS****BIOS Type**

128MB SPI Flash EEPROM with AMI BIOS

**BIOS Features**

ACPI 1.0 / 2.0 / 3.0 / 4.0

APM 1.2

DMI 2.3

Hardware BIOS Virus protection

PCI 2.3

Plug and Play (PnP)

RTC (Real Time Clock) Wakeup

SMBIOS 2.7.1

UEFI 2.3.1

USB Keyboard support

**Management****Software**SuperDoctor® 5, NMI, [SUM](#), [SPM](#), Intel® Node Manager, [SSM](#), [IPMI2.0](#), Watchdog**Power Configurations**

Power-on mode for AC power recovery, ACPI Power Management

**PC Health Monitoring****Voltage**

VBAT, System level control, Supports system management utility, Monitors CPU voltages, Chassis intrusion header, 6 -fan status, +5V standby, +5V, +3.3V, +12V

**LED**

UID/Remote UID

CPU / System Overheat LED

**Temperature**

Monitoring for CPU and chassis environment

CPU thermal trip support

Thermal Monitor 2 (TM2) support

PECI

**FAN**

6x 4-pin fan headers (up to 6 fans)

Thermal control tachometer fan connectors

Fan speed control

Overheat LED indication

**Other Features**

WOL

M.2 NGFF connector

CPU thermal trip support for processor protection

Control of power-on for recovery from AC power loss

VHD

**Operating Environment****Operating Temperature Range**

0°C - 50°C (32°F - 122°F)

**Non-Operating Temperature Range**

-40°C - 70°C (-40°F - 158°F)

**Operating Relative Humidity Range**

8% - 90% (non-condensing)

**Non Operating Relative Humidity Range**5% - 95% (non-condensing)

---

## Parts List

### Standard Parts (Bulk Package)

**I/O Cables**Part Number CBL-0044L • [eStore](#)

Qty 2

Description 57.5CM SATA FLAT S-S  
PBF

---

### Standard Parts (Retail Package)

**I/O Cables**Part Number CBL-0044L • [eStore](#)

Qty 6

Description 57.5CM SATA FLAT S-S  
PBF

---

**QRG**

Part Number MNL-1925-QRG

Qty 1

Description Motherboard Quick  
Reference Guide

---

### Optional Parts

**1U I/O Shield**

Part Number MCP-240-00159-0N

Qty --

Description Optional WIO rear  
window MCP-240-00159-  
0N with removable I/O  
will require for 1U WIO  
redundant power supply  
chassis

---