


X12SPM-TF

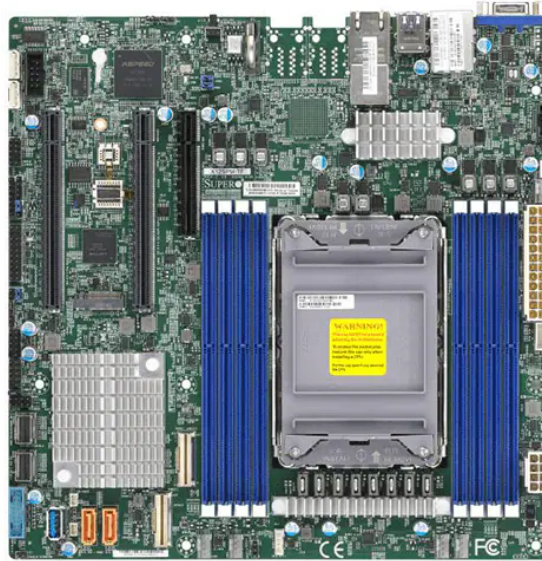

Embedded Ready Dual 10GbE

Key Features

3rd Gen Intel® Xeon® Scalable processors, Single Socket LGA-4189 (Socket P+) supported, CPU TDP supports Up to 270W TDP

Intel® C621A

Up to 2TB 3DS ECC RDIMM, DDR4-3200MHz; Up to 2TB 3DS ECC LRDIMM, DDR4-3200MHz

Up to 2TB Intel® Optane™ Persistent Memory 200 Series, in 8 DIMM slots

4x NVMe port PCIe 4.0 x4 via SlimSAS connector

1 PCIe 4.0 x8,

2 PCIe 4.0 x16,

2 PCIe 4.0 x8 SlimSAS connectors

M.2 Interface: 1 SATA/PCIe 3.0 x4

M.2 Form Factor: 2280, 22110

M.2 Key: M-Key

Intel® C621A controller for 10 SATA3 (6 Gbps) ports; RAID 0,1,5,10

Dual LAN with 10GBase-T with Intel® X550

Supports 12V DC power input

5 USB 3.2 Gen1 (2 rear, 1 Type-A, 2 via header), 6 USB 2.0 (2 rear, 4 via headers)

Specifications

Product SKUs**MBD-X12SPM-TF****Physical Stats****Form Factor**

microATX

Dimension

9.6" x 9.6" (24.38cm x 24.38cm)

Processor**CPU**

3rd Gen Intel® Xeon® Scalable processors

Single Socket LGA-4189 (Socket P+) supported, CPU TDP supports Up to 270W TDP

Core

Up to 40 cores

System Memory**Memory Capacity**

8 DIMM slots

Up to 2TB Intel® Optane™ Persistent Memory 200 Series

Up to 2TB 3DS ECC LRDIMM, DDR4-3200MHz; Up to 2TB 3DS ECC RDIMM, DDR4-3200MHz

Memory Type

ECC, DDR4 LRDIMM (3DS), RDIMM (3DS)

DIMM Sizes

LRDIMM 3DS: 128GB, 256GB

LRDIMM: 64GB, 128GB

RDIMM: 8GB, 16GB, 32GB, 64GB

Memory Voltage

1.2V

Error Detection

Corrects single-bit errors

On-Board Devices**Chipset**

Intel® C621A

SATA

Intel® C621A controller for 10 SATA3 (6 Gbps) ports; RAID 0,1,5,10

IPMI

ASPEED AST2600 BMC

Graphics

1 ASPEED AST2600 BMC port(s)

Network Controllers

Dual LAN with 10GBase-T with Intel® X550

Input / Output**SATA**

10 SATA3 (6Gbps) port(s)

LAN

2 RJ45 10GBase-T ports

USB

6 USB 2.0 port(s) (4 via header; 2 rear)

5 USB 3.2 Gen1 port(s) (2 via header; 2 rear; 1 type A)

Video Output

1 VGA port(s)

Serial Port

1 COM Port(s) (1 header)

DOM2 SATA DOM (Disk on Module) power connector support**TPM**

1 TPM Header

Expansion Slots**PCIe**

2 PCIe 4.0 x16,

1 PCIe 4.0 x8,

2 PCIe 4.0 x8 SimSAS connector

M.2

M.2 Interface: 1 SATA/PCIe 3.0 x4

Form Factor: 2280, 22110

Key: M-Key

System BIOS**BIOS Type**

AMI UEFI

BIOS Features

ACPI 6.0

RTC (Real Time Clock) Wakeup

SMBIOS 3.0 or later

Management**Software**

[Redfish API](#), [Supermicro Server Manager \(SSM\)](#),
[Supermicro Power Manager \(SPM\)](#), [Supermicro Update Manager \(SUM\)](#), [SuperDoctor® 5](#), [Super Diagnostics Offline](#)
[, KVM with dedicated LAN](#), [IPMI 2.0](#)

Power Configurations

Power-on mode for AC power recovery, ACPI Power Management

Security**Hardware**

Trusted Platform Module (TPM) 2.0

PC Health Monitoring**Voltage**

VBAT, Supports system management utility, Monitors CPU voltages, Chassis intrusion header, 5 -fan status, 3.3V standby, +5V standby, +5V, +3.3V, +12V, +1.8V

LED

UID/Remote UID

Suspend static indicator LED

CPU / System Overheat LED

Temperature

CPU thermal trip support

PECI

FAN

5x 4-pin fan headers (up to 5 fans)

System level control

PWM fan speed control

5 fans with tachometer status monitoring

Pulse Width Modulated (PWM) fan connectors

Other Features

WOL, UID, RoHS, M.2 NGFF connector, CPU thermal trip support for processor protection, Control of power-on for recovery from AC power loss, ACPI power management

Operating Environment**Operating Temperature Range**

0°C - 60°C (32°F - 140°F)

Non-Operating Temperature Range

-20°C - 60°C (-4°F - 140°F)

Operating Relative Humidity Range

10% - 85% (non-condensing)

Non Operating Relative Humidity Range

10% - 95% (non-condensing)

Parts List

Standard Parts (Bulk Package)

CPU carrier

Part Number	SKT-1205L-P4IC-FXC
Qty	1
Description	CPU carrier for 3rd Gen Intel Xeon Scalable Processors

I/O Cables

Part Number	CBL-0044L • eStore
Qty	2
Description	57.5 cm SATA FLAT S-S PBF

I/O Shield

Part Number	MCP-260-00130-0N
Qty	1
Description	STD I/O Shield for X12SPM-TF with EMI Gasket

Standard Parts (Retail Package)

CPU carrier

Part Number	SKT-1205L-P4IC-FXC
Qty	1
Description	CPU carrier for 3rd Gen Intel Xeon Scalable Processors

I/O Cables

Part Number	CBL-0044L • eStore
Qty	2
Description	57.5 cm SATA FLAT S-S PBF

I/O Shield

Part Number	MCP-260-00130-0N
Qty	1
Description	STD I/O Shield for X12SPM-TF with EMI Gasket

QRG

Part Number	MNL-2271-QRG
Qty	1
Description	Motherboard Quick Reference Guide

Optional Parts

1U I/O Shield

Part Number	MCP-260-00131-0N
Qty	--
Description	Standard 1U I/O Shield with EMI Gasket

I/O Cables

Part Number	CBL-SAST-0809A-100 • eStore
Qty	--
Description	SlimSAS x4 to 4 SATA cable

TPM security module

Part Number	AOM-TPM-9671V	AOM-TPM-9670V
Qty	--	--

Description	SPI capable TPM 1.2 with Infineon 9670 controller with vertical form factor	SPI capable TPM 2.0 with Infineon 9670 controller with vertical form factor
-------------	---	---
