



MicroCloud A+ Server AS -3015MR-H5TNR

3U 5-Node MicroCloud with double-width GPU support



Key Applications



Cloud Computing, Web/Collocation Services, Web Cache, CDN, Video Streaming, Social Networking, Downloads, Corporate - WINS, DNS, Print, Login,

Key Features

- Single Socket AMSingle Socket AM5 (LGA-1718) AMD EPYC™ 4005/4004 or Ryzen™ 7000 / 9000 Series Processor up to 170W with air cooling;
- Support for up to 1 double-width PCIe GPU accelerator card;
- Up to 4 DIMMs supporting up to 192GB DDR5-5600MT/s (1DPC)/ 3600MT/s (2DPC);
- Up to 1 PCIe 5.0 x16 LP + 1 PCIe 5.0 x4 MicroLP slots;
- Up to 2 internal fixed 2.5" NVMe + 2 internal fixed 2.5" SATA drive bays;
- 4 Redundant 2000W Titanium Level power supplies;
- 3U Rackmount chassis with 30.51" (775mm) depth;



Form Factor	3U Rackmount Enclosure: 449 x 131 x 775mm (17.68" x 5.16" x 30.51")
Processor	Single Socket AM5 (LGA-1718) AMD EPYC™ 4005/4004 Series Processor Up to 16C/32T; Up to 128MB Cache
GPU	Max GPU Count: Up to 1 double-width GPU Supported GPU: NVIDIA PCIe: L40, L40S, L4, A16, A2, A10 AMD PCIe: Instinct™ MI210
System Memory	Slot Count: 4 DIMM slots Max Memory (1DPC): Up to 192GB 5600MT/s ECC/non-ECC DDR5 UDIMM Max Memory (2DPC): Up to 192GB 3600MT/s ECC/non-ECC DDR5 UDIMM
Drive Bays Configuration	Default: Total 4 bays <ul style="list-style-type: none">• 2 internal fixed 2.5" PCIe 5.0 NVMe drive bays• 2 internal fixed 2.5" SATA drive bays M.2: 1 M.2 NVMe slot (M-key 2280/22110)
Expansion Slots	Default <ul style="list-style-type: none">• 1 PCIe 5.0 x16 FHFL double-width slot• 1 PCIe 5.0 x4 MicroLP slot Option A <ul style="list-style-type: none">• 2 PCIe 5.0 x8 LP slots
On-Board Devices	NVMe: NVMe; (Native) Chipset: System on Chip Network Connectivity: No NIC option supported
Input / Output	USB: 2 USB 2.0 ports Video: 1 port TPM: 1 TPM Onboard/port 80

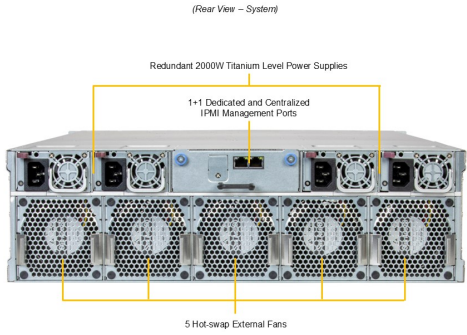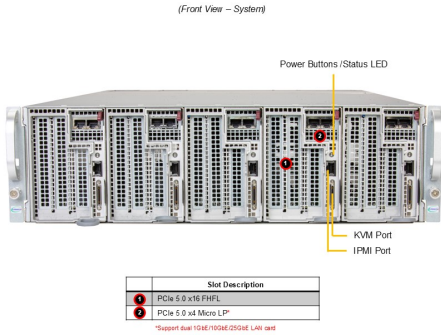

System Cooling	<p>Fans: 5 Heavy Duty 8cm Fan(s)</p> <p>Air Shroud: 10 Air Shrouds</p>
Power Supply	4x 2000W Redundant (3 + 1) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	<p>Temperature: Monitoring for CPU and chassis environment</p> <p>CPU: Monitors for CPU Cores, +3.3V, +5V, +12V, +3.3V Standby, +5V Standby, VBAT, Memory, Chipset Voltages.</p> <p>3-Phase-switching voltage regulator with auto-sense from 0.5V-2.3V</p> <p>FAN: Fan speed control, Dual Cooling Zone</p>
Dimensions and Weight	<p>Weight: Gross Weight: 147 lbs (66.68 kg)</p> <p>Net Weight: 107.5 lbs (48.76 kg)</p> <p>Available Color: No Paint</p>
Operating Environment	<p>RoHS Compliant</p> <p>Operating Temperature: 10°C to 35°C (50°F to 95°F)</p> <p>Non-operating Temperature: -30°C to 60°C (-22°F to 140°F)</p> <p>Operating Relative Humidity: 8% to 80% (non-condensing)</p> <p>Non-operating Relative Humidity: 8% to 90% (non-condensing)</p>
Motherboard	Super H13SRE-F
Chassis	CSE-MC301G-000NFP