




**CERTIFIED COMBINED  
PROTECTION WHICH  
MEETS POLICE  
APPROVED STANDARDS**

Grade II protection with 90 mins fire protection for paper documents.



# DUOGUARD GII

## BURGLARY & FIRE-RESISTANT PROTECTION



### KEY FEATURES

- Burglary protection in accordance with the European standard, EN 1143-1, as certified by ECB-S for Grade II
- Approved by SP Technical Research Institute of Sweden in accordance with fire resistance class NT Fire 017 – 90 paper and SP’s certification rules for fire resisting storage cabinets, SPCR 002
- The three-way boltwork is made from solid steel bolts
- Torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight and minimising transportation and installation costs
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to withstand burglary attempts
- Attractive dark grey appearance (RAL 7016)
- A Class A mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity
- Optional fittings include a data media insert certified, 60 Diskette by NT Fire 017, for one hour’s fire protection

BY **GUNNEBO**®


**Chubb**safes  
*Trusted the world over.*

# DUOGUARD GII

## PRODUCT SPECIFICATIONS

Model	External height (mm)	External width (mm)*	External depth (mm)**	Internal height (mm)	Internal width (mm)***	Internal depth (mm)	Volume (litres)	Weight (kg)	Standard Fittings
65	578	526	547	452	400	360	65	265	1 shelf
110	716	626	587	590	500	386	114	379	2 shelves
150	901	626	587	775	500	386	150	456	2 shelves
200	1176	626	587	1050	500	386	203	582	2 shelves
300	1626	626	587	1500	500	386	290	748	3 shelves
350	1626	701	611	1500	575	410	354	829	3 shelves

Projection of hinge\*(20mm) and projection of handle\*\* (65mm) not included. \*\*\*Width excluding shelf racking strips. Racking reduces the internal width by 15mm

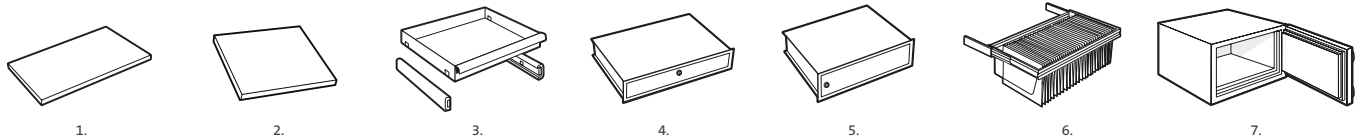

### INTERNAL FITTINGS

1. Shelf \*
2. Reinforced shelf \*\*
3. Extendable shelf
4. Full width drawer
5. Lockable cupboard
6. Pull out filing frame.
7. Data media insert

\* Max shelf capacity 60kg. \*\* Max shelf capacity 120kg

### LOCK OPTIONS



As the primary locking option, DuoGuard GII safes can be fitted with either a high-security electronic lock (Class B) or a key lock (Class A).

Dual locking is available from model 110.

All locks are tested by ECB+S and are certified in accordance with the EN 1300 standard.



Approved by the Association of Insurance Surveyors

### FIRE TESTING

DuoGuard GII has been approved in accordance with the Swedish standard, NT Fire 017 – 90 Paper, which means that the safe will protect paper documents for 90 minutes. This certification was awarded by SP Technical Research Institute of Sweden.

### BURGLARY TESTING



DuoGuard GII has been approved by ECB+S in accordance with the European standard EN 1143-1 for burglary protection in Grade II. A range of attack tools were used to test DuoGuard GII's level of resistance, ranging from basic tools to sophisticated thermal and electrical equipment.



The DuoGuard GII range is accredited by Secured by Design and meets police approved standards

Authorised dealer

[www.chubbsafes.com](http://www.chubbsafes.com)

The data given in this material may be subject to change without prior notice. This document is not contractually binding. The 'Chubb' brand is owned by Chubb plc and is a registered trademark used under license. See [www.chubbsafes.com](http://www.chubbsafes.com) for more information.