




COMBINED FIRE AND BURGLARY PROTECTION
IN ONE SAFE. THE HOMESAFE RANGE MEETS **POLICE APPROVED STANDARDS**

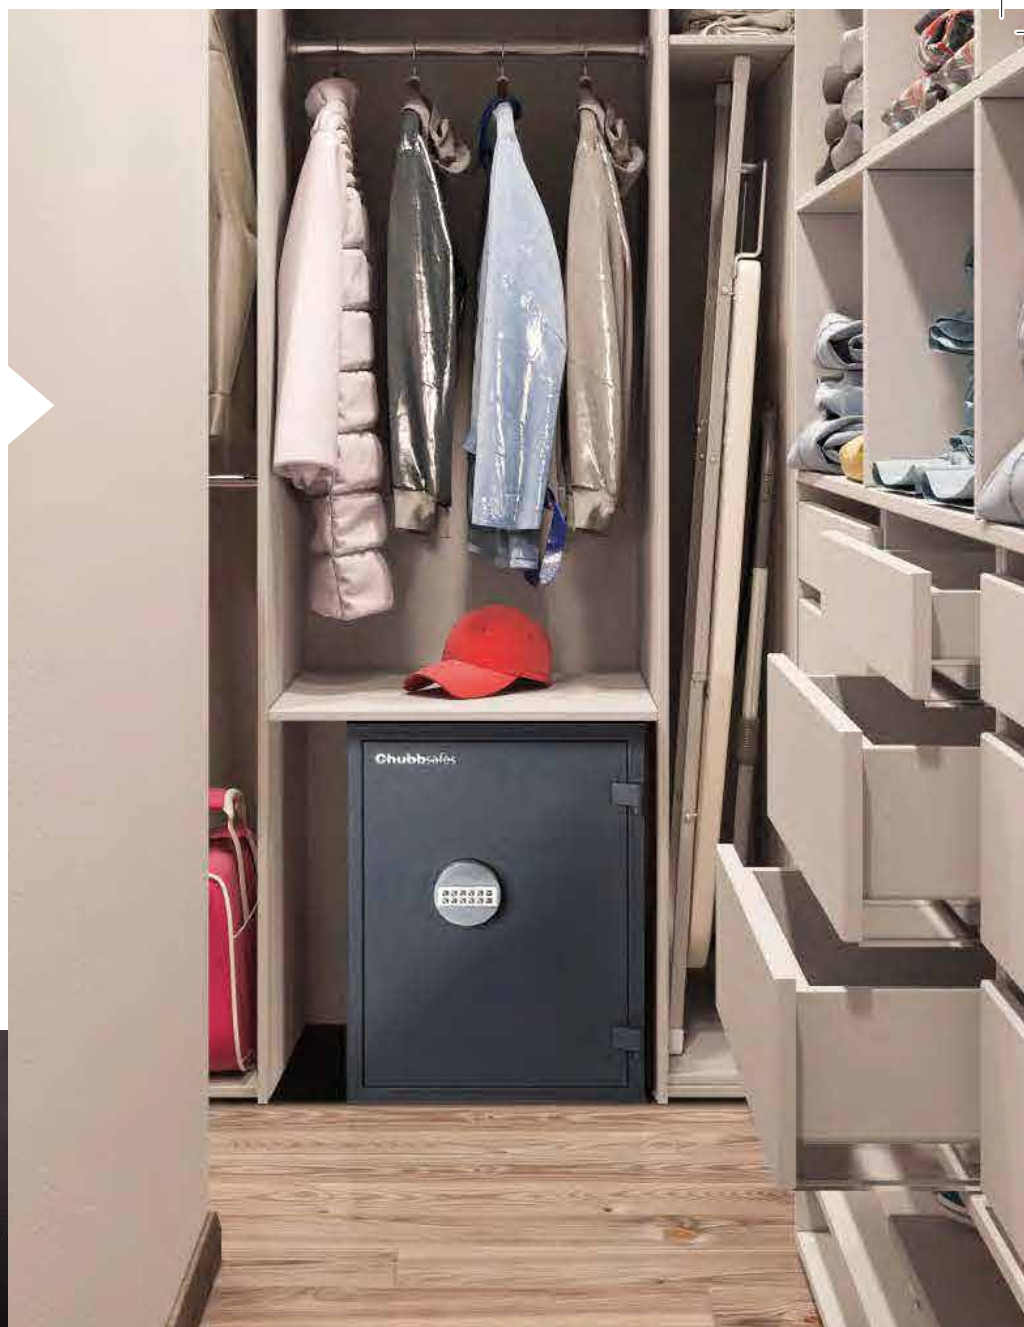

HOMESAFE S2 30P

BURGLARY & FIRE-RESISTANT SAFE



EN 15659
LFS 30 P



EN 14450
S2

KEY FEATURES


- EN 14450 certified by ECB•S to level S2 burglary protection.
- EN 15659 certified by ECB•S for 30-minutes fire protection for documents.
- Choice of 6 sizes: from 11 to 91 litre capacity.
- Choice of locking options in all sizes: EN 1300 certified double-bitted key lock or EN 1300 certified electronic lock.
- Attractive dark grey (RAL 7016) appearance.
- Meets police approved standards
- Prepared and anchoring kit supplied to allow the safe to be securely base or rear fixed.
- Ideal safe for protecting cash and valuable items, as well as passports, title deeds and other important documents in the home and office.
- The safe door is secured using the new revolutionary "V" bolt system. The design of the locking bolts helps maintain door integrity both when under physical attack and during a fire.

BY **GUNNEBO**

Chubbsafes
Trusted the world over.

HOMESAFE S2 30P

PRODUCT SPECIFICATIONS

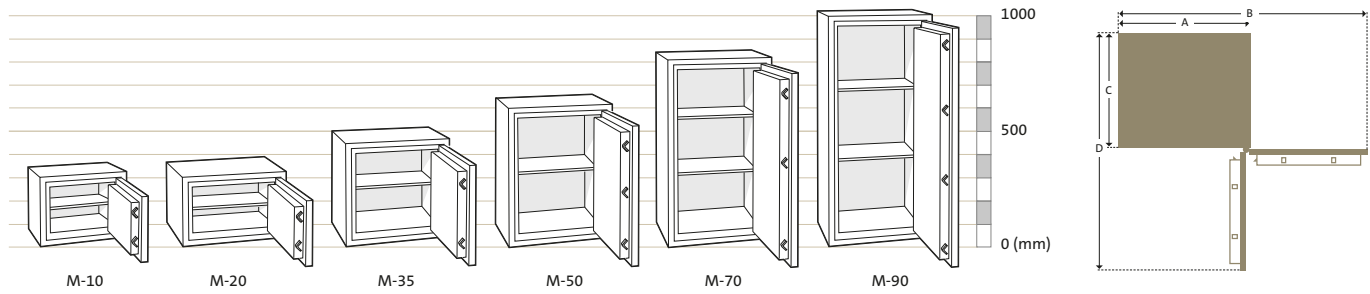

Model	External height (mm)	External width (mm)	External depth* (mm)	Width with door open 180° (B)	Depth with door open 90° (D)	Internal height (mm)	Internal width (mm)	Internal depth (mm)	Volume (litres)	Weight (kg)	Shelf
10	300	360	300	662	627	210	270	191	11	24	1
20	300	445	390	832	803	210	355	281	21	32	1
35	450	445	390	832	803	360	355	281	35	42	1
50	600	445	390	832	803	510	355	281	51	53	1
70	800	445	390	832	803	710	355	281	71	65	2
90	1000	445	390	832	803	910	355	281	91	78	2

* Hinges project 20mm beyond the depth (C) given above. In standard electronic models, the overall projection increases to 30mm.

LOCK OPTIONS

All sizes are available with either a key lock or an electronic code lock. All locks are certified by ECB•S in accordance with European Standard EN 1300.

KEY LOCK

Key lock versions are opened and closed simply by turning the inserted key.



ELECTRONIC LOCK

The high-security electronic lock includes the following features, easily programmed by the owner: 1 master code and 1 user code. Time delay of up to 99 minutes between lock being operated and door being opened. Opening window between 1-19 minutes.

CONSTRUCTION

Both the walls and the door are constructed using an inner and outer layer of steel containing a specially formulated burglary and fire resistant material developed by Chubb safes. This material provides class-leading performance with low weights enabling installation almost anywhere!

FIXING OPTIONS

The HomeSafe range has dual base and rear fixing holes

CERTIFICATION



30P FIRE PROTECTION

The whole range has been certified by ECB•S in accordance with European Standard EN 15659 to provide 30-minute protection for documents in the event of a fire

LEVEL S2 BURGLARY PROTECTION

All sizes have been certified by ECB•S in accordance with European Standard EN 14450 to burglary resistance Level S2

ACCREDITED BY SECURED BY DESIGN



The HomeSafe range meets police approved standards. Secured by Design is the flagship UK initiative to help 'design out' crime through the use of high-quality, innovative products and processes.



Approved by The Association of Insurance Surveyors

The data given in this material may be subject to change without further notice. This document is not contractually binding. The 'Chubb' brand is owned by Chubb plc and is a registered trademark used under license. See www.chubbsafes.com for more information.