



**INNOVATIVE SAFE  
FOR CERTIFIED  
GRADE II AND III  
BURGLARY PROTECTION**



# PROGUARD

## BURGLARY-RESISTANT PROTECTION



### KEY FEATURES


- Burglary protection in accordance with the European standard, EN 1143-1, as certified by ECB•S for Grades II and III
- ProGuard's special barrier material provides certified burglary protection whilst also keeping the total weight of the safe down. Less weight means greater installation options
- Innovations made with the Grade III models means that a higher level of protection can be offered in a safe with reduced wall thickness and increased interior capacity
- The three-way boltwork is constructed with solid steel bolts
- For additional security, ProGuard is fitted with an active relocker and anti-drilling plates have been incorporated into the boltwork to withstand burglary attempts
- Dependent on Grade, a Class A key lock or a Class B high security electronic lock, approved in accordance with EN 1300, are both available as primary lock options. Grade III models must have a minimum of 1 x Class B lock fitted as standard
- Every model can be customised with a range of internal fittings to maximise storage capacity
- ProGuard has a modern design with an ergonomic soft-touch handle

# PROGUARD

## PRODUCT SPECIFICATIONS

Model	External height (mm) Gd II/III	External width* (mm) Gd II/III	External depth** (mm) Gd II/III	Internal height (mm) Gd II/III	Internal width (mm) Gd II/ III	Internal depth (mm) Gd II/III	Volume (litres) Gd II/III	Weight (kg) Gd II/III
60	530	500	521	430/440	400/410	360/359	62/65	234/209
110	690	600	561	590/600	500/510	386/396	114/121	334/315
150	875	600	561	775/785	500/510	386/396	150/159	402/377
200	1150	600	561	1050/1060	500/510	386/396	203/214	501/486
300	1600	600	561	1500/1510	500/510	386/396	290/305	744/655
350	1600	675	585	1500/1510	575/585	410/420	354/371	846/703
450	1850	675	616	1750/1760	575/585	440/451	443/463	981/813

Projection of hinge \*(20mm) and handle \*\*(65mm) not included

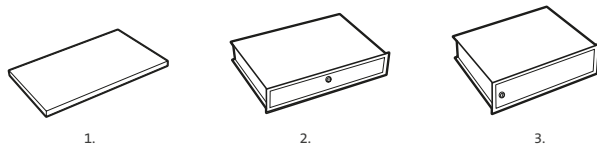

### INTERNAL FITTINGS

1. Shelf - 20mm high - all sizes
2. Full width drawer - 100mm high - sizes 110 - 450
3. Lockable cupboard - 335mm high - sizes 110 - 450

### LOCK OPTIONS

As the primary locking option, ProGuard safes can be fitted with either a high-security electronic lock or a key lock. For Grade III models, at least one EN 1300 Class B lock must be fitted as standard.

All locks are tested by ECB•S and are certified in accordance with the EN 1300 standard.

### BURGLARY TESTING



ProGuard has been approved by ECB•S in accordance with the European standard, EN 1143-1, for burglary protection in Grades II and III.

A range of attack tools were used to test ProGuard's level of resistance, from basic tools to sophisticated thermal and electrical equipment.



Approved by the Association of Insurance Surveyors

### IMPROVED CAPACITY

Innovations made with the Grade III models have allowed the thickness of the safe walls to be reduced. This means that a safe with a higher level of protection will also offer greater capacity for the storing of valuable items and sensitive documents.

Authorised dealer

[www.chubbsafes.com](http://www.chubbsafes.com)