

CD150

Multi Tank Conveyor Dishwasher W 2110mm x D 765mm x H 1445mm

Washtech rack conveyors are designed and constructed with a wide range of customisable system accessories to optimise the productivity of the busiest washrooms.

The CD150 is a fully automatic rack conveyor dishwasher with a versatile pre-wash module and a powerful wash module including a final rinse zone that only activates when a rack is present. Configured to meet the requirements of each customer, the CD150 is a powerful dishwasher that with the right system accessories will provide a versatile and highly productive wash solution. Capable of washing 150 racks or 2,700 plate equivalents per hour, the CD150 is the perfect dishwasher for busy kitchens.

Since 1981 Washtech dishwashers have been constructed from heavy duty stainless steel, and are engineered specifically for the unique local conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech CD150 will not let you down.

Standard Features:

- Capacity of up to 150 racks/2,700 plate equivalents per hour
- Rinse economiser only draws fresh water when racks are in the rinse zone
- 600mm pre-wash module
- 1200mm wash module including final rinse
- Heavy duty stainless steel construction and wash manifold
- Full width, easily removable stainless steel wash filter trays for easy cleaning
- Removable upper and lower heavy duty stainless steel wash arm cassettes
- Powerful drive with safety clutch allows the machine to wash heavy items with ease
- Autostart minimises operating costs by only activating pumps and drive when a rack is present
- Easily maintained electromechanical controls
- Will wash items up to 400mm high, and taller with suitable operator procedures
- Water consumption of just 300 litres per hour
- In-house CAD design service for every site layout
- Watermark approved backflow prevention
- Comprehensive Moffat 5-2-1 warranty

Includes:

- 2 x 500mm dish rack (600 70028)
- 2 x 500mm cup rack (600 70029)
- 2 x cutlery container (C660503)
- 1 x cutlery basket (C660508)



Optional System Accessories Include:

- Dryer modules
- Sorting benches
- Custom scrap stations
- Pre-rinse troughs
- Setdown benches
- Sideload tables
- Inlet and outlet corner pawl drives
- Straight and curved roller tables
- Heavy duty roller table limit switch



CD150

Multi Tank Conveyor Dishwasher
W 2110mm x D 765mm x H 1445mm

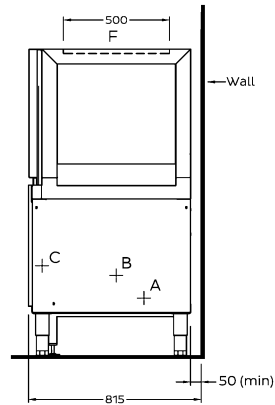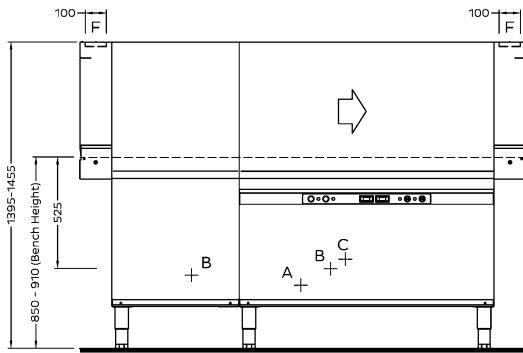

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9158 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
wasales@moffat.com.au





ISO9001
All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd
Version: 1904

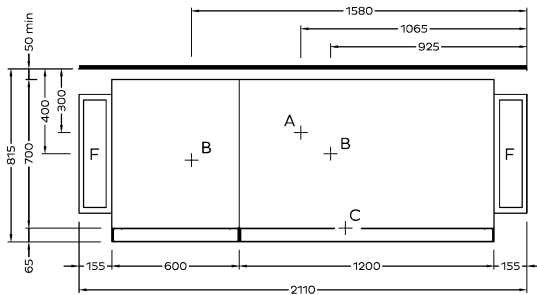

| | | | | |
|---------------------|---|-----------|----------------|---------------|
| A Hot water | | | | |
| Temperature | 65°C | | | |
| Connection | 3/4" male; hose supplied | | | |
| Pressure | 200-350kPa | | | |
| Flow | 20 litres per min | | | |
| Quality | Potable - refer table | | | |
| Backflow Prevention | DCV | | | |
| Consumption | 300 litres per hour | | | |
| B Waste | | | | |
| Connection | 1.5" BSP male | | | |
| Line | 2.0" / 50mm minimum | | | |
| C Electrical | | | | |
| | V | Hz | A/phase | max kW |
| 3P + N + E | 415 | 50 | 28 | 19.00 |
| F Extraction | | | | |
| Typical minimum | 250L/sec | | | |
| | Requirements will vary by site, consult with ventilation engineer | | | |

| | | |
|-------------------|----------------|---------------|
| Dimensions | | |
| Width | Machine | Packed |
| Depth | 2110 | 2300 |
| Height | 765 | 875 |
| Weight | 1445 | 1510 |
| Cubicmetres | 265 | 350 |
| | | 3.04 |

| | | |
|----------------------|------------|------------|
| Water Quality | | |
| | Min | Max |
| pH | 7 | 8 |
| Hardness ppm | 20 | 100 |
| Chlorides Cl- | | 100 |
| SO ₄ | | 400 |
| Fe | | 0.1 |
| Mn | | 0.5 |
| Cu | | 0.05 |
| Cl ₂ | | 0.1 |

Refer operator manual for installation instructions. Isolating switch must be within 1m of, and not directly behind the machine.