

# PW3C

## Wide Body Passthrough Warewasher c/w Heat Recovery Unit W 1305mm x D 920mm x H 2015mm

Washtech warewashers are built to improve the efficiency of operations washing oversized and/or heavily soiled items, from bakeries to production kitchens, supermarkets to hospitals.

The PW3C is a powerful, highly durable, simple-to-use and easy-to-maintain passthrough warewasher. It features Washtech Hybrid Controls which combine IP65 stainless switches, tried-and-tested switchgear, with a customisable electronic timer. Built with a large wash chamber and carefully counterbalanced passthrough door, the PW3C is ideal for washing bins, crates, bowls and other oversized items.

The PW3C also features a highly efficient integrated heat recovery unit which ensures minimal steam emissions and reduced energy consumption.

Since 1981 Washtech dishwashers have been constructed from heavy duty stainless steel, and are engineered specifically for the unique local conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech PW3C will not let you down.

### Special Features:

- Suitable for installation without an extraction canopy in many situations\*
- Integrated heat recovery unit which preheats the cold water supply, significantly reducing steam emissions, energy consumption and water treatment cost

### Standard Features:


- Versatile 3, 5 and 7 minute wash cycles
- Large internal wash chamber with useable area of W 1050mm x D 640mm x H 650mm
- Low hot water consumption of 4.0 litres per cycle
- Washtech Hybrid Controls
- Easy Installation supplied with:
  - Water supply hose
  - Detergent and rinse aid pumps with injector lines
  - No commissioning required
- High powered dual wash systems
- Suitable for connection to low inlet water pressure (break tank and rinse pump fitted)
- Heavy-duty stainless steel construction and wash manifold
- Robust stainless steel wash and rinse arms with precision stainless steel jets
- Double heavy duty stainless steel filtration system including dual scrap trays and separate wash inlet filter
- Wash chamber easily accessible via counter-sprung hood
- Easy loading with inline bench work
- Watermark approved backflow prevention
- Comprehensive Moffat 5-2-1 warranty

### Includes:

- 1 x 500mm dish rack (600 70028)
- 1 x 500mm cup rack (600 70029)
- 1 x cutlery basket (C660508)
- 1 x 435mm cup cover (k0452)




\* Full certificate and conditions from SEED available on request



# PW3C

Wide Body Passthrough Warewasher c/w Heat Recovery Unit  
**W 1305mm x D 920mm x H 2015mm**

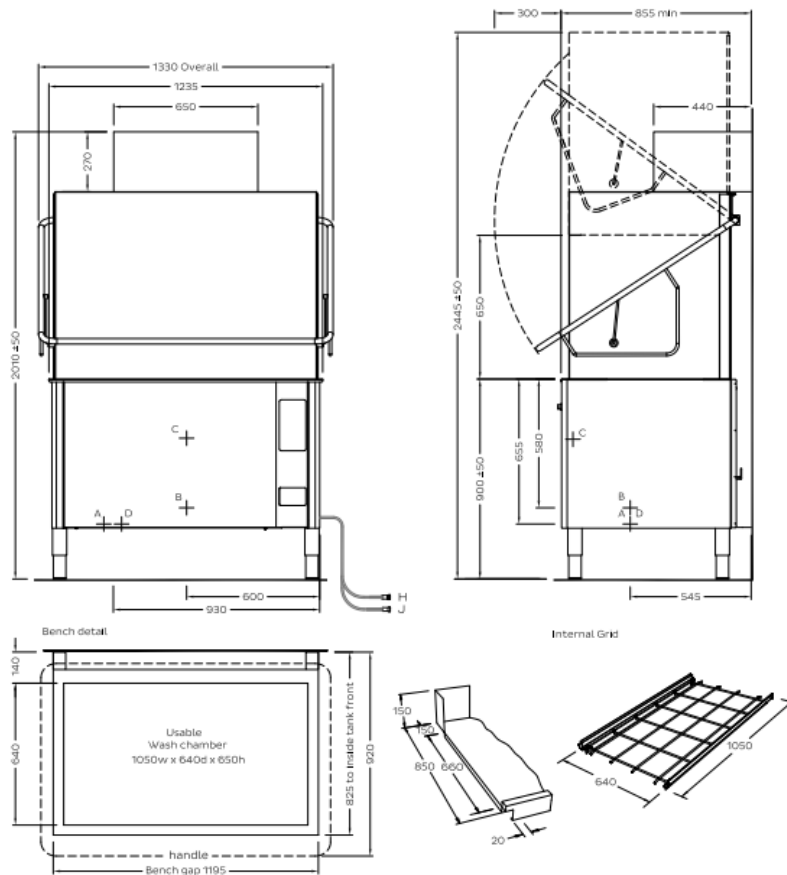

**MOFFAT**  
moffat.com.au

**Australia**  
Moffat Pty Limited

**Victoria/Tasmania**  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9158 3833  
vsales@moffat.com.au

**New South Wales**  
Telephone 02-8833 4111  
nswsales@moffat.com.au

**South Australia**  
Telephone 03-9518 3888  
vsales@moffat.com.au

**Queensland**  
Telephone 07-3630 8600  
qldsales@moffat.com.au

**Western Australia**  
Telephone 08-9202 6820  
wasales@moffat.com.au



**ISO9001**  
All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd  
Version: 1904

<b>D Cold water</b>	Temperature	<25°C			
	Connection	3/4" male; hose supplied			
	Pressure	200-350kPa			
	Flow	10 litres per min			
	Quality	Potable - refer table			
	Backflow Prevention	Atmospheric Vacuum Breaker			
	Consumption	4.0 litres per cycle			
<b>A Hot water (fill only)</b>	Temperature	65°C			
	Connection	3/4" male; hose supplied			
	Pressure	200-350kPa			
	Flow	20 litres per min			
	Quality	Potable - refer table			
	Backflow Prevention	Atmospheric Vacuum Breaker			
<b>B Waste</b>	Connection	1.5" BSP male			
	Line	2.0" / 50mm minimum			
<b>C Electrical</b>	<b>V</b>	<b>Hz</b>	<b>A/phase</b>	<b>max Kw</b>	
	3P + N + E	415	50	30	19.50
	Option:				
	* 3P + N + E	415	50	20	12.00

<b>Dimensions</b>	<b>Machine</b>	<b>Packed</b>
Width	1305	1450
Depth	920	1100
Height	2015	2055
Weight	255	306
Cubicmetres		3.03

<b>Water Quality</b>	<b>Min</b>	<b>Max</b>
pH	7	8
Hardness ppm	20	100
CL-		100
SO <sub>4</sub>		400
Fe		0.1
Mn		0.5
Cu		0.05
CL <sub>2</sub>		0.1

Refer operator manual for installation instructions. Isolating switch must be within 1m of, and not directly behind the machine.  
\* Connection on lower power rating will reduce the wash and rinse heating, and delay the operation of the machine.