# CD120 RACK CONVEYOR OPERATOR MANUAL





#### Warnings



Before installation and commissioning, you must read the safety instructions and warnings carefully and all the warning labels attached to the equipment.

Equipment contains dangerous voltages and can be hazardous if installed or operated incorrectly. Non-compliance with warnings or failure to follow the instructions contained in this manual can result in loss of life, severe personal injury or serious damage to property.

Before installation or repair, you must read the instructions and warnings carefully and all the warning labels attached to the equipment.

All service/repair work must be carried out by qualified personnel only and ensure compliance with all local codes and standards including AS/NZS 3500.1.

#### **Important Information**



Failure to comply (even partially) with the instructions given in this manual will invalidate the product warranty and relieves the manufacturer of any responsibility.

The alteration of machine operation, design or the replacement of parts not approved by the manufacturer may void warranties and approvals.

This machine is intended for commercial use only.

This machine is designed for the cleaning of fresh food waste from crockery, cutlery, containers and food preparation and manufacturing equipment. Consult the manufacturer regarding suitability of the machine for other applications. It is not a waste disposal unit, and it is essential that significant loose soil or waste is removed from washware by pre-rinsing or scraping, before it is placed in the machine.

The information contained in this document is checked, reviewed and updated regularly to ensure that it is accurate and relevant to the model described. However discrepancies and errors can occur. We welcome your feedback.

Document subject to change without prior notice.

Information supplied in this manual is copyright. No part of this work may be reproduced or copied in any form or by any means, electronic or mechanical without the express permission of Washtech.

## **Contents**

- 2. Warning
- 3. Contents

- Safety Instructions
   Installation Diagram
   Installation Instructions
   Installation Checklist
   Installation Troubleshooting
- 10. Operator Use Guide
- 11. Operator Care Wash Zone
- 12. Operator Care Curtains
- 13. Operator Troubleshooting
- 14. Schematic Diagram
- 15. Accessories



## **Safety Instructions**

#### **Installation**

- Use qualified, skilled personnel.
- Follow installation instructions.
- Connect to correct voltage and supply current.
- Provide fully accessible Electrical Isolation Switch & water supply valves.

#### **Training and Supervision**

- Read and Understand the Operating instructions and train all staff.
- This appliance must not be operated by children or infirm persons.
- Machine panels must only be removed by suitably qualified and trained personnel internal hazards include live electrics and very hot surfaces.
- No part of this appliance is not intended for use as a stepladder do not stand on open door.

#### **Hot Surfaces**

• Some surfaces may be hot or very hot.

#### Chemicals

- Commercial dishwashing detergents are hazardous handle with care.
- Read and follow the safety information found on the labels of detergent containers and Material Safety Data Sheets.
- Use protective eyewear and clothing if decanting containers.

#### **Hot Water**

- Do not put hands in wash water which may be over 60°C and contain hazardous caustic detergent.
- Rinse water can be over 90°C.
- Door safety switches are designed for emergency use only.

#### Cleaning

- Do not hose down the machine or splash water over the exterior.
- Watch for broken glass etc. when cleaning the inside of the machine.

#### **Warnings**



Equipment contains dangerous voltages and can be hazardous if installed or operated incorrectly. Non-compliance with Warnings or failure to follow the instructions contained in this manual can result in loss of life, severe personal injury or serious damage to property.


Installation and servicing must be carried out by a suitably qualified person in compliance with all local codes and standards including AS/NZS 3500.1.


## **Installation Diagram**


#### **CD120L Installation**


Part #: CD120LDate: 22-04-2022

Version: 3-A









#### Services

A Hot water 65°C (DCV fitted)

B Waste - tank drainage point

C Electrical connection

Extraction - Consult with ventilation engineer.

Allow for steam. Total extraction rate typically required for duct connections

2" BSP 400-415V, 50Hz, 3P+N+E

200-350 kPa

3/4" 50mm 25A 3 10m/min (170/sec)

Note: Isolating switch must be within 1m of, and not directly behind the machine. Isolating water valve must be readily accessible

## Installation Instructions

#### **Machine Positioning**

- Unpack machine, check for damage and complete delivery.
- Install machine on sound waterproof self-draining floor and use adjustable feet to level



NOTE: Failure to level the machine correctly may result in leaking during the cycle, overflowing from the door sill, poor hygiene through the wash tank not being able to drain correctly.

Allow room for detergent to one side of machine or in adjacent cupboard. 20 litre container requires approximately 450H x 250W x 350D, but smaller containers are available from many suppliers.

#### Ventilation

• 10 m³/min = 170 l/sec - refer installation diagram - extraction via connected ducts or overhead canopy.

#### **Inlet Water Operation**

Incoming water should be within the following standard requirements:

- Temperature: 65°C.
- Connection: 20 mm (3/4" BSP) male.



NOTE: Flush supply line before connection. Poor quality supply or excessive water hardness may affect performance or damage machine - filtration and/or softening is recommended.

- Flow rate: minimum 20 litres per minute.
- Water Consumption: 5 litres per minute.
- Pressure: between 200 and 350 kPa.



NOTE: This machine is not equipped with a rinse booster pump and relies on incoming water pressure to drive the rinse cycle.

NOTE: If above 350 kPa fit pressure limiter valve (LPV). Do not use small diameter plastic

• Backflow prevention: Dual Check Valve (DCV) fitted standard.

#### **Water Quality Requirements**

Hardness

The incoming water should also be within the following parameters: maa



min max	20 100		7			
lons	Cl-	SO <sub>4</sub>	Fe	Mn	Cu	Cl <sub>2</sub>
Max mg/L	100	400	0.1	0.5	0.05	0.1

NOTE: Levels above or below the stated requirements can be expected to increase component wear and reduce the expected useful life of the dishwasher. If in doubt, it is best to consult a water specialist and have the incoming water professionally tested and treated if necessary.

## **Installation Instructions**

#### **Power**

• Electrical supply required is 3p/25A 415V 50Hz via switched outlet adjacent to machine.

NOTE: Equipment contains dangerous voltages and can be hazardous if installed or operated incorrectly. Non –compliance with warnings or failure to follow the instructions contained in this manual can result in loss of life, severe personal injury or serious damage to property.

#### Chemical

Detergent and rinse aid pumps are not supplied with the CD100. We recommend you consult
your chemical supplier and/or a local chemical expert for their recommended detergent and
Rinse Fluid injector pumps.



NOTE: Commercial detergents can be hazardous – read instructions, store safely and handle with care. Care needs to be taken when changing chemicals, ensuring that the detergent is not accidentally connected to the rinse fluid inlet line.

NOTE: If uncertain, please consult a chemical specialist for assistance in selecting the right chemicals and calibrating machine settings to suit this along with your unique site conditions and requirements.

#### Waste

• 40mm connection required to point B as specified on install diagram. An S-trap must be fitted on each of these points.



NOTE: Either copper or P.V.C. may be used for the waste connection – P.V.C. is more resistant to some harsh detergents. Some authorities however suggest that copper is required because the machine rinses at up to 90°C. It is important to note that rinse water mixes with the 65°C wash water before discharge and then flows into the trap where the water is further cooled before entering the drainage plumbing. We recommend consulting your local authority to ensure your site remains compliant.

#### **Installation Checklist**

• Complete attached Installation Checklist to ensure machine is installed and running correctly, and operator is familiar with operating procedures.

## **Installation Checklist**

Check	Notes							
DELIVERY								
SUPPLIED COMPLETE?	CHECK THERE HAS NOT BEEN ANY TRANSIT DAMAGE							
POSITION								
LEVEL AND STABLE?	ON SOUND, WATERPROOF, SELF-DRAINING FLOOR							
WATER								
ISOLATOR VALVE FITTED?	ACCESSIBLE, ALL FITTINGS SOUND, AND NO LEAKS							
TEMPERATURE CORRECT	HOT WATER INLET 65°C							
PRESSURE CORRECT (200 – 350 kPa)?	LIMITER FITTED IF ABOVE RANGE, RINSE PUMP IF BELOW							
FLOW RATE CORRECT (> 20L per min)?	RINSE PUMP FITTED IF BELOW REQUIREMENT							
QUALITY WITHIN REQUIREMENTS?	FILTER OR SOFTENER IN PLACE IF OUTSIDE REQUIREMENTS							
POWER								
ISOLATING SWITCH (3p/25A 415V 50Hz)?	FITTED, FUNCTIONAL AND ACCESSIBLE							
CORRECT SUPPLY	VOLTAGE, CURRENT, CIRCUIT BREAKER ALL CORRECT							
WASTE								
CONNECTION TO 50mm PIPE?	CORRECT CONNECTION TO PLUMBING							
CHEMICALS								
CHEMICALS								
CHEMICALNAME	CONTAINER NO LEAKS PRIMED CALIBRATED							
	CONTAINER NO LEAKS PRIMED CALIBRATED							
CHEMICAL NAME	CONTAINER NO LEAKS PRIMED CALIBRATED							
CHEMICAL NAME DETERGENT	CONTAINER NO LEAKS PRIMED CALIBRATED							
CHEMICAL NAME  DETERGENT  RINSE FLUID	CONTAINER NO LEAKS PRIMED CALIBRATED  MULTIPLE CYCLES RUN, NO ISSUES							
CHEMICAL NAME  DETERGENT  RINSE FLUID  MACHINE OPERATION								
CHEMICAL NAME  DETERGENT  RINSE FLUID  MACHINE OPERATION  MACHINE RUNNING CORRECTLY?	MULTIPLE CYCLES RUN, NO ISSUES							
CHEMICAL NAME  DETERGENT  RINSE FLUID  MACHINE OPERATION  MACHINE RUNNING CORRECTLY?  CHEMICAL DOSAGE CORRECT?	MULTIPLE CYCLES RUN, NO ISSUES  CORRECTLY FLOWING INTO MACHINE, NO FOAMING							
CHEMICAL NAME  DETERGENT RINSE FLUID  MACHINE OPERATION  MACHINE RUNNING CORRECTLY?  CHEMICAL DOSAGE CORRECT?  ALL OPERATIONS CORRECT?  OPERATOR TRAINING	MULTIPLE CYCLES RUN, NO ISSUES  CORRECTLY FLOWING INTO MACHINE, NO FOAMING  FILL LEVEL CORRECT, NO DRAINAGE ISSUES  HE OPERATION MANUAL AND WALL CHART, AND IS AWARE OF THE							
CHEMICAL NAME  DETERGENT RINSE FLUID  MACHINE OPERATION  MACHINE RUNNING CORRECTLY?  CHEMICAL DOSAGE CORRECT?  ALL OPERATIONS CORRECT?  OPERATOR TRAINING  ENSURE THAT THE CUSTOMER HAS BEEN GIVEN T	MULTIPLE CYCLES RUN, NO ISSUES  CORRECTLY FLOWING INTO MACHINE, NO FOAMING  FILL LEVEL CORRECT, NO DRAINAGE ISSUES  HE OPERATION MANUAL AND WALL CHART, AND IS AWARE OF THE							
CHEMICAL NAME  DETERGENT  RINSE FLUID  MACHINE OPERATION  MACHINE RUNNING CORRECTLY?  CHEMICAL DOSAGE CORRECT?  ALL OPERATIONS CORRECT?  OPERATOR TRAINING  ENSURE THAT THE CUSTOMER HAS BEEN GIVEN TIMPORTANCE OF BOTH USING AND CLEANING THE	MULTIPLE CYCLES RUN, NO ISSUES  CORRECTLY FLOWING INTO MACHINE, NO FOAMING  FILL LEVEL CORRECT, NO DRAINAGE ISSUES  HE OPERATION MANUAL AND WALL CHART, AND IS AWARE OF THE							
CHEMICAL NAME  DETERGENT  RINSE FLUID  MACHINE OPERATION  MACHINE RUNNING CORRECTLY?  CHEMICAL DOSAGE CORRECT?  ALL OPERATIONS CORRECT?  OPERATOR TRAINING  ENSURE THAT THE CUSTOMER HAS BEEN GIVEN TIMPORTANCE OF BOTH USING AND CLEANING THE START UP	MULTIPLE CYCLES RUN, NO ISSUES  CORRECTLY FLOWING INTO MACHINE, NO FOAMING  FILL LEVEL CORRECT, NO DRAINAGE ISSUES  HE OPERATION MANUAL AND WALL CHART, AND IS AWARE OF THE MACHINE CORRECTLY							
CHEMICAL NAME  DETERGENT RINSE FLUID  MACHINE OPERATION  MACHINE RUNNING CORRECTLY?  CHEMICAL DOSAGE CORRECT?  ALL OPERATIONS CORRECT?  OPERATOR TRAINING  ENSURE THAT THE CUSTOMER HAS BEEN GIVEN T IMPORTANCE OF BOTH USING AND CLEANING THE START UP  PRE-RINSE AND RACKING	MULTIPLE CYCLES RUN, NO ISSUES  CORRECTLY FLOWING INTO MACHINE, NO FOAMING  FILL LEVEL CORRECT, NO DRAINAGE ISSUES  HE OPERATION MANUAL AND WALL CHART, AND IS AWARE OF THE MACHINE CORRECTLY  BETTER TO RINSE PLATES THAN REMOVE WASTE FROM MACHINE							
CHEMICAL NAME  DETERGENT RINSE FLUID  MACHINE OPERATION  MACHINE RUNNING CORRECTLY? CHEMICAL DOSAGE CORRECT? ALL OPERATIONS CORRECT?  OPERATOR TRAINING  ENSURE THAT THE CUSTOMER HAS BEEN GIVEN TIMPORTANCE OF BOTH USING AND CLEANING THE START UP  PRE-RINSE AND RACKING  DRAINING THE MACHINE	MULTIPLE CYCLES RUN, NO ISSUES  CORRECTLY FLOWING INTO MACHINE, NO FOAMING  FILL LEVEL CORRECT, NO DRAINAGE ISSUES  HE OPERATION MANUAL AND WALL CHART, AND IS AWARE OF THE MACHINE CORRECTLY  BETTER TO RINSE PLATES THAN REMOVE WASTE FROM MACHINE DRAIN THE MACHINE DAILY							
CHEMICAL NAME  DETERGENT RINSE FLUID  MACHINE OPERATION  MACHINE RUNNING CORRECTLY?  CHEMICAL DOSAGE CORRECT?  ALL OPERATIONS CORRECT?  OPERATOR TRAINING  ENSURE THAT THE CUSTOMER HAS BEEN GIVEN TIMPORTANCE OF BOTH USING AND CLEANING THE START UP  PRE-RINSE AND RACKING  DRAINING THE MACHINE  SHUT-DOWN AND DAILY CLEANING	MULTIPLE CYCLES RUN, NO ISSUES  CORRECTLY FLOWING INTO MACHINE, NO FOAMING  FILL LEVEL CORRECT, NO DRAINAGE ISSUES  HE OPERATION MANUAL AND WALL CHART, AND IS AWARE OF THE MACHINE CORRECTLY  BETTER TO RINSE PLATES THAN REMOVE WASTE FROM MACHINE DRAIN THE MACHINE DAILY  CHECK WASH ELEMENTS HAVE COOLED BEFORE CLEANING							

## **Installation Troubleshooting**

#### Machine not starting or filling

- Ensure water supply to machine is turned on.
- Ensure power supply to machine is turned on.
- Check that the water inlet hose isn't twisted or kinked.

#### Poor wash results

- Check that there are adequate pre-rinse processes in place.
- Ensure high quality non-foaming commercial dishwasher detergent has been connected at the correct dosage for your site, water quality and application. If uncertain, consult a chemical specialist.
- Ensure that the wash temperature is between 60°C and 65°C.

#### Chemical residue on items after the cycle

- Check water pressure, this is likely too low and below the minimum 200kPa required.
- Check that nothing is obstructing the wash & rinse arms.
- Check the rinse fluid dosage is not too high. If uncertain, please consult a chemical specialist.

#### Dishwasher is foaming

- Ensure high quality non-foaming commercial dishwasher detergent has been connected at the correct dosage for your site and application. If uncertain, please <u>consult a chemical specialist</u>.
- Allow wash water to heat to at least 60°C prior to starting the first cycle as some commercial dishwasher chemical will foam at low temperatures.
- Low water pressure can result in above average detergent concentrations. As low water pressure also impacts rinse results, we recommended this is solved by installing a rinse pump rather than compensating by reducing chemical dosages.

#### Other equipment in the kitchen has needed filters or has scale

- Due to the high temperatures in dishwashers, scale will build up in the wash tank, on the arms and in the rinse tank. The incoming water should be treated. If uncertain, please <u>consult a water specialist</u>.
- As with a Combi-Oven, high chloride levels will do irreversible damage to a number of the components inside a commercial dishwasher. The incoming water should be appropriately treated. If uncertain, please <u>consult a water specialist</u>.

#### Pawl drive not operating

- Clear the area around the limit switch on the roller table.
- Adjust the clutch tension of the Pawl Drive motor, the Pawl drive clutch tension can be tightened by turning the 2 nuts at the bottom of the pawl drive shaft clockwise or loosened by turning the 2 nuts anticlockwise.

(Note: the tension must be at a level where a person can grab the pawl drive with both hands and stop the pawl drive motion).

#### Grinding noise escaping from the machine

• Wash pump rotation must be checked after installation to ensure correct direction (excessive noise and damage with incorrect direction).

#### Machine stops and refills during the commissioning stage

- Fit the curtains according to the Operator Care Curtains diagram (page 12).
- Ensure the Scrap Trays are fitted in the Wash Zone.

## **Operator Use Guide**



#### **START**

- Turn on at wall.
- Fit Wash Pump Inlet Filter.
- Fit Drain Upstand.
- Fit Scrap Trays.
- Shut all doors and turn wall and Machine Power on.
- Machine begins filling. Full light amber when tank is full.
- Ready light glows amber when the machine is up to required temperature.

#### **OPERATION**

- · Press Start button to operate machine.
- Start button glows green while machine operates.
- Stack a rack with items and push into the inlet zone of the machine.

NOTE: Pumps and conveyor will stop operating if the machine is left idle for 2 minutes. To restart the pump and conveyor simply feed a new rack into the inlet of the machine.

#### SHUT DOWN - END OF EACH DAY

- Press Stop button and Power button.
- Take out Drain Upstand to gravity drain the machine.
- Proceed with Operator Care Wash Zone cleaning instructions.

#### SUGGESTED BEST PRACTICE

Pre-rinse Scrape and/or rinse trays, plates & glasses in cool water.

Chemical Use a good quality non foaming commercial detergent and drying agent – do


not use domestic detergents which will cause the machine to foam.

## **Operator Care – Wash Zone**

#### CD120 Wash Zone

Part #: CD120 Wash ZoneDate: 22/04/2022

Version: 1-A

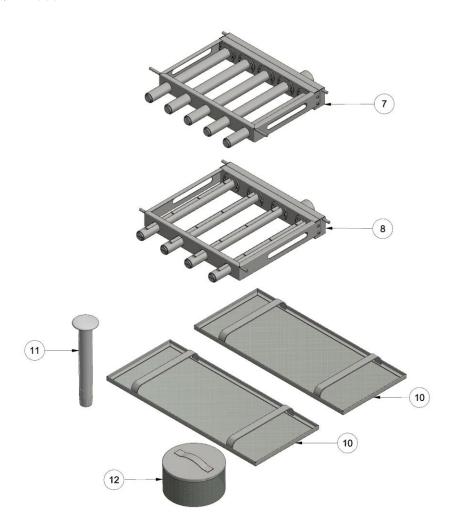

#### **Daily Cleaning**

- Remove Scrap Trays (10) and clean with a brush and water to clear grid.
- Remove Wash Pump Inlet Filter (12) and clean with a brush and water to clear grid.
- Return Drain Upstand (11), Wash Pump Inlet Filter (12) and Scrap Trays (10) to the machine.

#### Weekly Cleaning

- To be done in conjunction with Daily cleaning.
- Remove Lower Wash Arms (8) lift up to unhook the arm and then withdraw.
- Remove Upper Wash Arms (7) push the clip up and then withdraw.
- Check to ensure arms are clear of obstructions. Remove end caps to clear if not.
- Flush Arms (7 & 8) with water. Use a toothpick or paper clip if necessary to clear jets.
- Return the Wash Pump Inlet Filter (12), the Drain Plug (11), Scrap Trays (10), Lower Wash Arms (8) and Upper Wash Arms (7) to the machine.


## **Operator Care - Curtains**

#### **CD120L Curtains**

Part #: CD120L CURTAINS

• Date: 01/042022

Version: 1-A

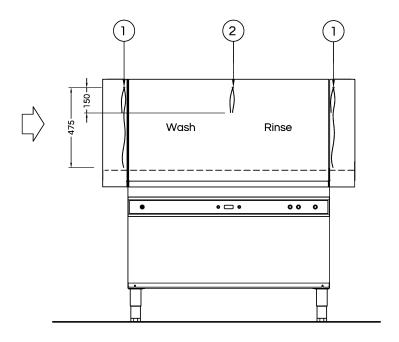

#### **Types Of Curtains**

- 1. Long anti splash curtain 600 x 475 (Part number: 840 90011).
- 2. Short anti splash curtain 600 x 150 (Part number 840 90013).

#### **Position of Curtains:**

- Curtains must be fitted at the inside of the vent hoods when vents are connected direct to extraction. If this instruction is ignored the machine may not maintain internal temperatures.
- Curtains may be fitted at the outside end of the machine when there is an overhead canopy and no direct connection to the machine.
- Broken curtains need to be replaced promptly.

### **Weekly Cleaning**

- Remove curtains from hooks.
- Place each curtain into a dishrack and wash through the machine.

## **Operator Troubleshooting**

lssue	Cause										
	POOR PRE-SCRAPING	CARRY OVER OF SOAP FROM SINK	OVERLOADING RACKS	POOR MACHINE CARE	JETS BLOCKED OR ARMS OBSTRUCTED	CURTAINS NOT FITTED CORRECTLY	WATER SUPPLY PRESSURE LOW	POOR WATER QUALITY*	RINSE TEMPERATURE LOW <75° C	LIMIT SWITCH ACTIVATED	WASH ARM NOT FITTED PROPERLY
DISHES NOT CLEAN	•		•	-	-		-	-	-		
STAINING	•				•		-				
FOAMING		•		-							
PROTEIN BLOOM	-		-	•	-		-		•		
DIRTY MACHINE	•			•							
FOOD RESIDUE ON WARE	-		•	-	-		•		-		
FILM/SPOTS ON WARE				-			-	•	-		
DETERGENT RESIDUE					-	•	-				
GREASY FILM/NO FIZZ							•				
WET WASHWARE			•	-			-				
SCALE BUILD UP IN MACHINE				-				•			
FILTERS ON OTHER EQUIPMENT								•			
PAWL DRIVE NOT OPERATING										•	
CRASHING SOUND AGAINST DOOR											•

MACHINE STOPS & REFILLS CONSTANTLY

#### IF PROBLEMS PERSIST CONTACT MOFFAT SERVICE ON 1300 264 217

<sup>●</sup> Likely cause ■ Possible cause


<sup>\*</sup> For issues that are likely due to poor water quality (scale building up, filters being required on other kitchen equipment etc.), we recommend you consult a local water specialist prior to calling in a dishwasher technician.

## **Schematic Diagram**

#### **CD120 Schematic Diagram**

Part #: 260100Date: 18-01-2022


Version: 1-A

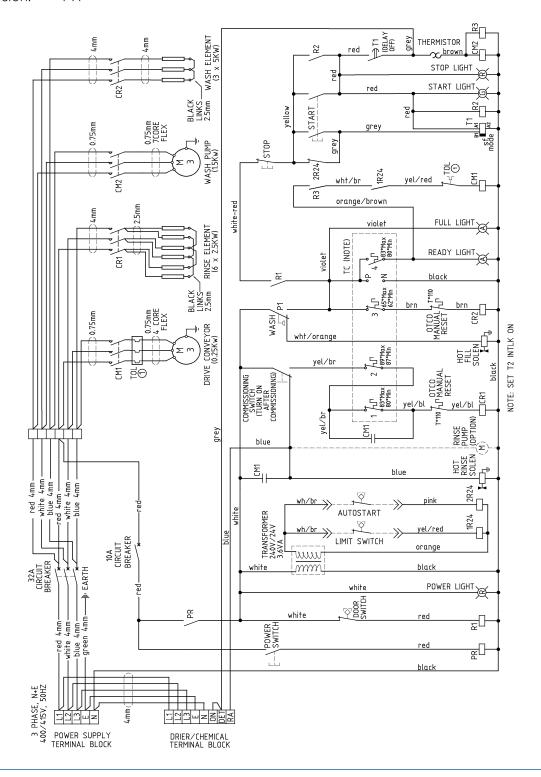


## Accessories

#### **CD120 Accessories**

Part #: CD120 ACWDate: 4-04-2022Version: 1-A



C660508 **CUTLERY BASKET CP8 FOR 500mm** 



600 70029 2 x CUPRACK CB 500mm X 75mm high





600 70028 2 x DISHRACK P12/18 500mm 18 DISH





C660503 2 x CUTLERY CONTAINER G Information supplied in this manual is copyright. No part of this work may be reproduced or copied in any form or by any means, electronic or mechanical without the express permission of the author/publisher

#### MOFFAT.

24HR Service 1300 264 217
Parts 1300 263 107
Tel 03 9518 3888
Fax 03 9518 3818
E-mail sales@moffat.com.au

manufactured by Washtech using the

In line with policy to continually develop and improve its products, Washtech Ltd reserves the right to change specifications and design without

an Ali Group Company



The Spirit of Excellence