

# GE

## Economy Compact Glasswasher – 365mm Rack W 440mm x D 515mm x H 780mm

Washtech's GE is a compact glasswasher ideal for the tightest of locations. The XG features Washtech Hybrid Controls which combine IP65 stainless switches, tried-and-tested switchgear, with a customisable electronic timer.


Since 1981 Washtech dishwashers and glasswashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech glasswasher will not let you down.

### Standard Features

- Rapid 1 minute glasswashing wash cycle
- Washes up to 540 glasses per hour
- Hot water consumption of 4.5 litres per cycle
- Washtech Hybrid Controls
- Selectable cold rinse
- Easy installation, supplied complete with:
  - Dual water supply hoses (hot & cold)
  - Detergent injector with injector line
  - 15 amp plugset
  - No commissioning required
- Heavy-duty stainless steel construction
- Lower wash/rinse arm with precision moulded jets and an upper rinse jet
- Watermark approved backflow prevention
- Comprehensive 5-2-1 Warranty


### Includes:

- 1x K0401- 365mm glass rack



# GE

## Economy Compact Glasswasher – 365mm Rack W 440mm x D 515mm x H 780mm

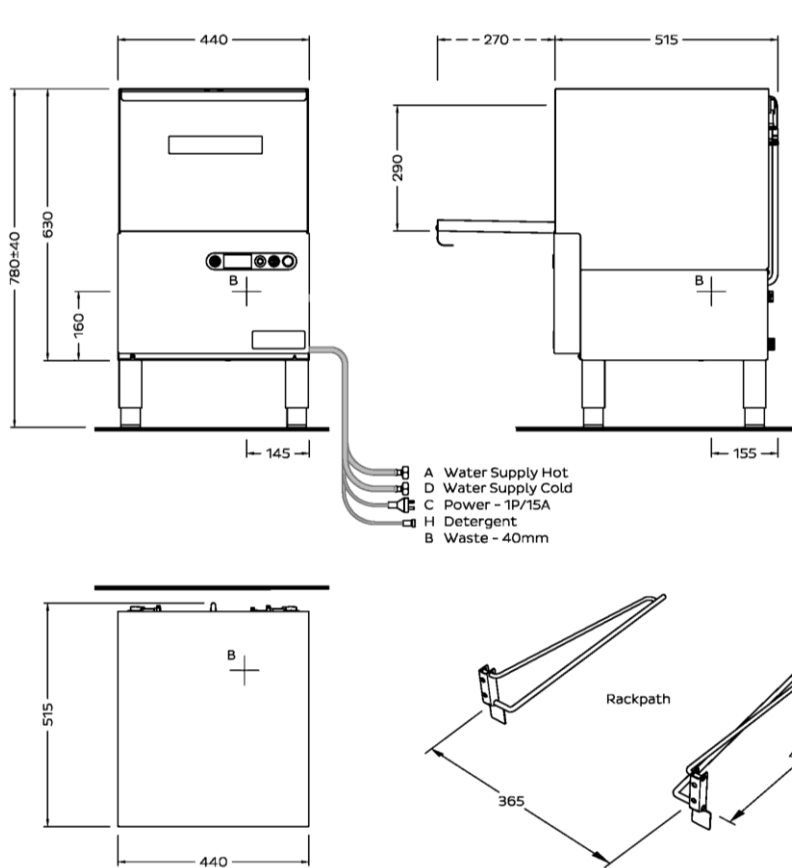

**Australia**  
Moffat Pty Limited

**Victoria/Tasmania**  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9158 3833  
vsales@moffat.com.au

**New South Wales**  
Telephone 02-8833 4111  
nswsales@moffat.com.au

**South Australia**  
Telephone 03-9518 3888  
vsales@moffat.com.au

**Queensland**  
Telephone 07-3630 8600  
qldsales@moffat.com.au

**Western Australia**  
Telephone 08-9202 6820  
wasales@moffat.com.au



**ISO9001**  
All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd  
Version: 1806

<b>A Hot water</b>	Temperature	65°C		
	Connection	3/4" male; hose supplied		
	Pressure	200-350kPa		
	Flow	20 litres per min		
	Quality	Potable - refer table		
	Backflow Prevention	Atmospheric Vacuum Breaker		
	Consumption	4.5 litres per cycle*		
<b>D Cold water (optional cold rinse)</b>	Temperature	20°C		
	Connection	3/4" male; hose supplied		
	Pressure	200-350kPa		
	Flow	20 litres per min		
	Quality	Potable - refer table		
	Backflow Prevention	Atmospheric Vacuum Breaker		
<b>B Waste</b>	Connection	1.5" BSP		
	Line	2" BSP		
<b>C Electrical</b>	<b>V</b>	<b>Hz</b>	<b>A/phase</b>	<b>max kW</b>
Single Phase	240	50	15	3

<b>Dimensions</b>	<b>Machine</b>	<b>Packed</b>
Width	440	480
Depth	515	570
Height	780	740
Weight	26	39
Cubicmetres		0.2

<b>Water Quality</b>	<b>Min</b>	<b>Max</b>
pH	7	8
Hardness ppm	20	100
CL-		100
SO <sub>4</sub>		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl <sub>2</sub>		0.1

Refer operator manual for installation instructions. Isolating switch must be within 1m of, and not directly behind the machine. Isolating water valve must be readily accessible.

\*Consumption may vary with site conditions.

an Ali Group Company



The Spirit of Excellence