


Instructions for Assembly – BELLAGIO


- Unpack the box
- **DO NOT MIX** the blades with Blades of OTHER fans.
- ALLEN - KEYS are provided in the box for assembly of these Fans.




- 1.- Take the fan motor and insert the DOWN-ROD in the
- Ceiling clamp assembly.
 - Tighten the Bolts as shown in the picture.

Sequence

1. Washer
 2. Spring washer
 3. Nut
 4. Insert LOCK PIN.
- Tighten Nut Fully



IMPORTANT : Must check LOCK PIN is inserted and SPREAD OPEN with PLIERS. This will ensure that the fan does not Fall in any case of Loosening of Fasteners.

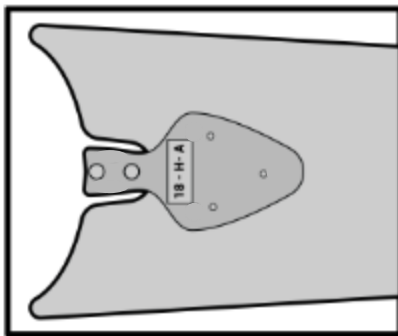


BLADES are Balanced in SETS.

BLADES are NUMBERED (18H-A or B or C)


18H denotes Motor Number

A or B or C denotes BLADE LOCATION



Match BLADE Code with MOTOR code

Keep “THIS SIDE UP” sticker facing the Ceiling




Tighten the ALLEN screws with the help of ALLEN wrench (provided)

ENSURE the screws are fully tight.

FOR FANS with REMOTE CONTROL

Fans Come pre-installed with Remote Receiver inside the Canopy

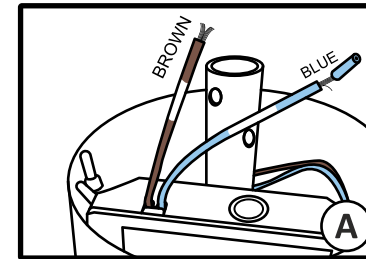

A. CONNECT

BROWN Main (Live) to Brown
BLUE Mains (neutral) to Blue
Earth Mains to Yellow/Green



Supplied REMOTE Controller
2 x AAA Batteries required (not supplied)

B. Ensure fan is within 10 meters of remote to operate properly.

IMPORTANT : DO NOT connect the REMOTE with ANY OTHER wall SPEED Controller. Doing so will VOID any warranty on the FAN/REMOTE.

Instructions to change fan-rod in BELLAGIO

