


Double Reach Lift Truck

Specifically designed for narrow aisle stacking


Features

- Maximum lifting height up to 6 meters and load 3,200 lbs.
- Unique reaching structure reach up to 42.5" and reach the double deep shelves
- Safety standard with power steering and SAS safety management system
- Strong chassis and mast increases stability
- CAN bus main wire and full AC control system improves the motor performance and lower the electricity consumption
- Suspension design and driving assembly provides efficient performance on all kinds of floors
- Accessible electric unit design and battery side out make it easier for maintenance work
- Equipped with EPS function and multifunctional finger joystick

* Other lift heights available

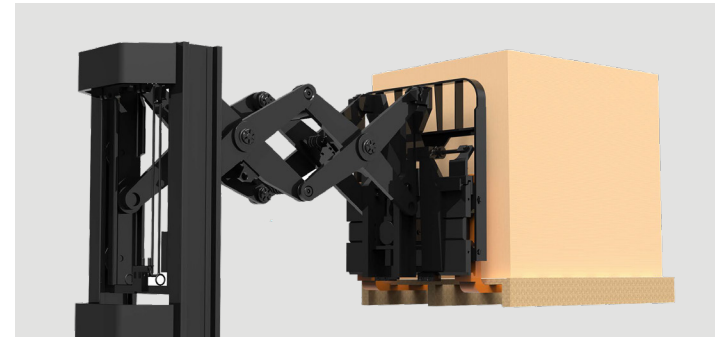

Maximum reach distance up to 1080 mm | 42.5"

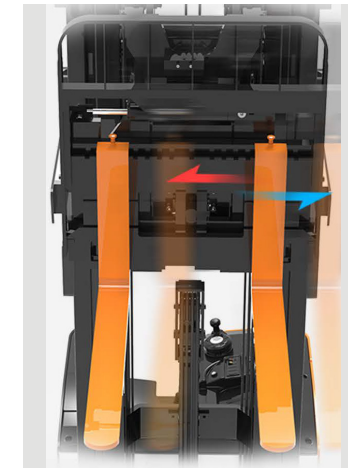

- Battery capacity up to 750AH for long operation time.
- Optional battery change platform helps to take battery out from the side



Options

- Fork camera
- Side shift function
- Pre selector lifting height function
- Fork horizon indicating lamp
- Laser for position indication
- Battery trolley
- Battery system
- Front light
- Working light

Double Reach Lift Truck

				Imperial	Metric
General Information	1.1	Manufacturer		Superlift	
	1.2	Model		RRE115	
	1.3	Power Type		Electric	
	1.4	Operator Type		Standing	
	1.5	Load Capacity at load centre	lbs.(kg)	3200 lbs	1450 kg
	1.6	Load Centre	in (mm)	23.6 "	600mm
	1.8	Load Distance (forks retracted)	in (mm)	12.6 "	287mm
	1.9	Wheel Base	in (mm)	64.96 "	1650mm
Weight	2.1	Truck Weight (without battery)	lbs (kg)	8466 lbs	3840kg
Tyres	3.1	Tyre Type		PU	
	3.2	Driving Wheels	in (mm)	13.5 " x 5.5 "	343mmx140mm
	3.3	Loading Wheels	in (mm)	5.0 " x 2.9 "	127mmx74mm
	3.4	Castor Wheel	in (mm)	8.0 " x 4.0 "	4200mmx100mm
	3.5	Number of Wheels		1x,2/4	

The parameters listed in the table are for standard models. For non-standard customization please contact us. The company reserves the right to modify the parameters.

				Imperial	Metric
Dimensions	4.1	Fork Carriage Tilt Degree	°	3/4	
	4.2	Lowered mast height	in (mm)	140 "	3556mm
	4.3	Free Lift	in (mm)	104 "	2642mm
	4.4	Lift Height	in (mm)	321 "	8150mm
	4.5	Extended mast height	in (mm)	357 "	9068mm
	4.7	Overhead Guard Height	in (mm)	95 "	2413mm
	4.10	Outtrigger Height	in (mm)	5.1 "	130mm
	4.20	Headlength	in (mm)	63.1 "	1604mm
	4.21	Overall Width	in (mm)	42.9 "	1098mm
	4.22	Fork Dimension	in (mm)	40/100/1070	
	4.23	Fork Carriage		2A	
	4.24	Fork Carriage Width	in (mm)	32.44 "	824mm
	4.25	Forks Width	in (mm)	7.9 " - 30.2 "	200-768mm
	4.26	Inside Distance between two support legs	in (mm)	34 " - 50 "	865-1270mm
	4.28	Reach Distance	in (mm)	40.5 "	1030mm
	4.32	Ground Clearance	in (mm)	1.97 "	50mm
	4.33	Working Aisle Width •(1200mm x 1000mm)	in (mm)	119 "	3023mm
	4.33	Working Aisle Width •(1000mm x 1200mm)	in (mm)	123.3 "	3132mm
	4.34	Working Aisle Width •(800mm x 1000mm)	in (mm)	121.6 "	3088mm
	4.35	Turning Radius	in (mm)	74.6 "	1895mm
4.37	Overall Length	in (mm)	82.4 "	2094mm	
Performance	5.1	Travel Speed w./w.o. load		6.21/6.21 mph	10/10 km/h
	5.2	Lift Speed w./w.o. load		64.96/98.42 fpm	0.33/0.5 m/s
	5.3	Lower Speed w./w.o. load		98.42/98.42 fpm	0.5/0.5 m/s
	5.4	Reach Speed		59.05fpm	0.3m/s
	5.5	Brakes		Electric	
	6.1	Battery Voltage	V/Ah	36 V/750Ah	
	6.2	Battery Weight	kg	1940 lbs	880 kg

The parameters listed in the table are for standard models. For non-standard customization please contact us. The company reserves the right to modify the parameters.



SUPERLIFT
SANITARY LIFTS

Double Reach Lift Truck

