


- 16 CH analog video input, compatible with 4K/ 5MP/4MP/1080p/ 720p AHD camera and CVBS input
- H.265/ H.264 video compression
- 4 SATA HDD, up to 8TB per HDD
- HDMI (4K)/ VGA/ BNC video outputs
- 16 CH playback
- Video management with sureSIGHT
- Supporting sureLINK for dynamic IP Internet connection
- iView HD for remote monitoring on mobile phones



Model

JN6916

Unit: mm

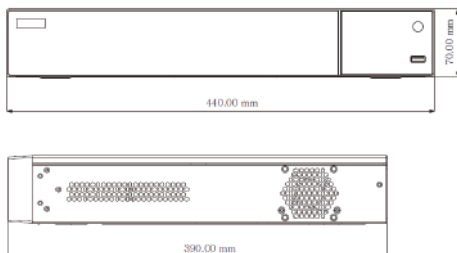

VIDEO INPUT	ANALOG CAMERA	compatible with 4K / 5MP / 4MP / 1080P / 720P AHD camera and CVBS input
	NO. OF CHANNEL	16
VIDEO OUTPUT	IP CAMERA	Compatible with 4K / 5MP / 4MP / 3MP / 1080P / 720P IP camera
	NO. OF CHANNEL	8
AUDIO	DIGITAL VIDEO	1 channel , 3840 x 2160, 1920 x 1080, 1280 x 1024
	VGA	1 channel , 1920 x 1080, 1280 x 1024
	BNC	CVBS ( used as the main or spot output )
RECORDING	INPUT	RCA x 16
	OUTPUT	RCA x 1
COMMUNICATION	IP CAMERA AUDIO INPUT	8
	COMPRESSION	H.265 / H.264
EVENT HANDLING	MODE	Manual, Schedule, Motion, Event-driven
	HD TYPE	SATA X4 (Max. 8TB per HDD)
POWER	ANALOG RECORDING FRAME RATE	<b>Normal:</b> 4K@6fps (PAL) / 7fps (NTSC) 5MP@12fps (PAL / NTSC) 4MP@12fps (PAL) / 15fps (NTSC) 1080P@25fps (PAL) / 30fps (NTSC) 720P@25fps (PAL) / 30fps (NTSC) CVBS WD1@25fps (PAL) / 30fps (NTSC) <b>Lite mode:</b> 4K Lite(1920x2160)@12fps (PAL) / 15fps (NTSC) 5MP Lite(1280x1936)@20fps (PAL / NTSC) 4MP Lite(1280x1440)@25fps (PAL) / 30fps (NTSC)
	PLAYBACK	16CH playback Play, Forward, Backward, Pause, Digital zoom
OPERATING ENVIRONMENT	NETWORK	RJ45 1000Mbps x 1
	CONCURRENT USER	10
MECHANICAL DESIGN	WEB SERVER	Built-in
	RS485	RS485 x1, connect to PTZ or keyboard
MECHANICAL DESIGN	USB	USB2.0 x 2
	EVENT TYPE	Video motion detection, External alarm, Video loss
MECHANICAL DESIGN	ACTION TYPE	Recording, Snap, Email, Preset
	ALARM INPUT	16
MECHANICAL DESIGN	RELAY OUTPUT	4
	POWER SUPPLY	AC 100V ~ 240V, 50~60Hz
MECHANICAL DESIGN	MAX. RATING	≤ 30W (without HDD)
	AMBIENT TEMPERATURE	-10°C - 50°C
MECHANICAL DESIGN	RELATIVE HUMIDITY	10% - 90%
	DIMENSION	440mm (W) x 400mm (D) x 78mm (H)
MECHANICAL DESIGN	WEIGHT	4.4 kg

Terms & Conditions 使用細則

Design and specifications are subject to change without prior notice. Copyright © 2018 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.