

TeleEye

- 1/3" 4MP CMOS sensor
- f=2.8mm fixed lens
Angle of view: 100°
- 20-30m IR illumination range
- H.265 / H.264 compression
- AI Detection:
Face detection
Human / Vehicle detection
- IP67 & IK10 ingress protection
- Power over Ethernet
- ONVIF Profile S

MP4022AE



4MP Network IR Fixed Dome with AI Detection



MODEL

MP4022AE

Unit: mm

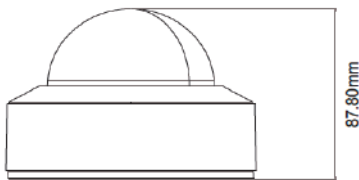

119.00mm

Accessories



Junction Box: JB0101B



Wall Mount Bracket:
JB0101B + WM0406



WM0203

Terms & Conditions 使用細則
Design and specifications are subject to change without prior notice. Copyright © 2019 Signal Communications Limited.
TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.



TeleEye Group
Hong Kong China Malaysia Philippines
South Africa Sri Lanka United Kingdom

VIDEO	IMAGE SENSOR	1/3" 4MP CMOS
	RESOLUTION	4MP (2560×1440), 3MP (2304×1296), 1080P (1920×1080), 720P (1280×720), D1, CIF, 480×240
	FRAME RATE	Up to 25/30fps
	MINIMUM ILLUMINATION	0.005 lux @F1.6, AGC ON; 0 lux with IR
	IR DISTANCE	20~30M
	LENS	f=2.8mm @F1.6 fixed lens
	ANGLE OF VIEW	100°
	ELECTRONIC SHUTTER	1 / 30 s ~ 1 / 100000 s
	VIDEO SETTINGS	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc
	AUDIO	INPUT
NETWORK INTERFACE		RJ45 × 1, 10M / 100M self-adaption
CONNECTIVITY	NETWORK PROTOCOL	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP,HTTP, 802.1x, UPnP, HTTPS, QoS
	CONCURRENT USERS	4
	WEB SERVER	Built-in
	ONVIF	Profile S
COMPRESSION	VIDEO COMPRESSION	H.265 / H.264
	VIDEO STREAMING	3 Independent Streams
	AUDIO COMPRESSION	G711A/U
FUNCTIONS	AI DETECTION	Face detection; Human detection; Vehicle detection
	SMART ALARM	Intrusion detection; Line crossing detection; Video Exception; Motion detection
	ACTION	Snap, Recording, Email
	ALARM INPUT	1CH
EDGE RECORDING	ALARM OUTPUT	1CH
	MICRO SD Card	Max. 128GB
POWER	VOLTAGE	12VDC
	MAX. RATING	<7W
	POE	YES, IEEE802.af
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE	-30°C ~ 60°C
	RELATIVE HUMIDITY	Less than 95% (non-condensing)
MECHANICAL DESIGN	WATER PROOF	IP67
	VANDAL RESISTANT	IK10
	DIMENSION	Φ 119 mm x 88mm
	WEIGHT	650g