

MQ6131-HD

3MP 30x Optical Zoom IR Speed Dome


- 1/2.8" 3MP Progressive CMOS Sensor
- Max. Resolution: 2048 x 1536 @20/30fps
- 30x Optical Zoom
- 100M IR Distance
- H.265 / Enhanced H.264 Compression
- IP66 Weather Proof
- TVS 6KV Lightning Protection, Surge Protection



Model

MQ6131-HD

Unit: mm

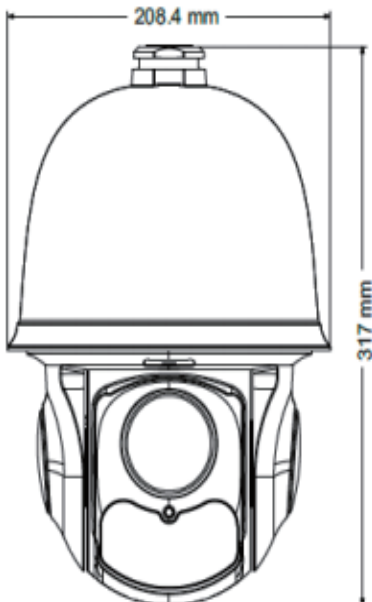

VIDEO	IMAGE SENSOR	1/2.8" 3MP Progressive CMOS
	MAX. RESOLUTION	2048 x 1536 (3MP)
	FRAME RATE	Up to 30fps
	MINIMUM ILLUMINATION	0.0Lux, IR ON, ~100M IR distance
AUDIO	LENS	30x Optical zoom, f=4.5mm ~135mm, F1.6~F4.4
	VIEW ANGLE	59.8°~ 2.34°
	INPUT, OUTPUT	1 CH
FUNCTION	PAN RANGE	360° endless rotation
	PAN SPEED	Preset speed: 150°/s; Manual control speed: 0.5 ~ 80°/s
	TILT RANGE	0 ~ 93° (auto rotation)
	TILT SPEED	Preset speed: 120°/s; Manual control speed: 0.5 ~ 70°/s
	PRESET	360
	CRUISE	8
	TRACK	4
	TIME TASK	8
	SCAN	2
	HOME POSITION	Yes
CONNECTIVITY	OSD MENU	Englih
	NETWORK INTERFACE	RJ-45
	NETWORK PROTOCOL	TCP / IP, UDP, DHCP, DDNS, NTP, RTSP, SMTP, FTP, PPPoE
	WEB SERVER	Built-in
COMPRESSION	ONVIF	Profile S
	VIDEO COMPRESSION	H.265 / Enhanced H.264
EVENT HANDLING	VIDEO STREAMING	3
	ALARM INPUT, ALARM OUTPUT	1
POWER	POWER SUPPLY	24V / 3000mA
	MAX. RATING	15W / 30W(IR on)
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE	~ 60°C
	RELATIVE HUMIDITY	0% - 95%
	WATER PROOF	IP66
MECHANICAL DESIGN	PROTECTION LEVEL	TVS 6KV lightning protection, surge protection
	DIMENSION	209 x 317mm
	WEIGHT	3.5kg

Terms & Conditions 使用細則
 Design and specifications are subject to change without prior notice. Copyright © 2019 Signal Communications Limited.
 TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.