

MYA PLUS



COLORS



FEATURES



KEY FEATURES


- Maxi display volume perfectly refrigerated
- No wire LED light system
- Double glazed glasses with no fog system
- Hinged double glazed doors on the operator side
- Assisted tilt down front glass opening system
- Automatic defrost: electric on the refrigerator version (+4°C); reverse cycle on the freezer version (-20°C) with three phase semi hermetic compressor
- Perfect product visibility all over the sides

MYA PLUS


Full refrigerated display showcase. Positive temperature (+4°C) and negative temperature (-20°C) for frozen cakes. Display structure completely realized in double glazed with self-closing doors on the operator side. N° 4 Glass shelves with shining S/S adjustable brackets. No wire LED light on the top and inside each shelf. Assisted tilt down opening system of the front glass. Built-in condensing unit. Shining S/S basement carter

CIAM
REFRIGERATION DESIGN


Distributed By
AG ADVANCED GOURMET
IN THE USA

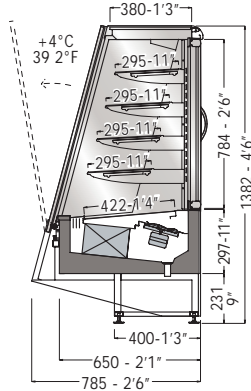

MYA PLUS PASTRY - COLD

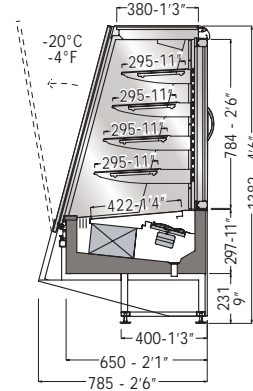

MYA PLUS PASTRY - FROZEN

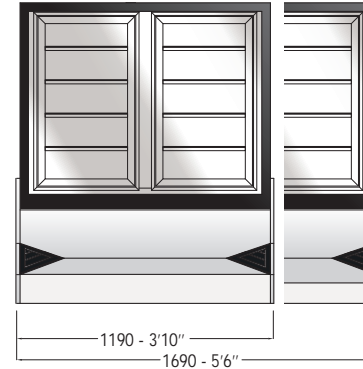

TECHNICAL FEATURE		POSITIVE TEMP. (COLD) - VERSIONS		NEGATIVE TEMP. (FROZEN) - VERSIONS	
		1150	1650	1150	1650
External dimensions (L-D-H)	inches mm	467½ - 307½ - 54¾ 1190-785-1382	66½ - 307½ - 54¾ 1690-785-1382	467½ - 307½ - 54¾ 1190-785-1382	66½ - 307½ - 54¾ 1690-785-1382
Crated dimensions (L-D-H)	inches mm	54¾ - 38¾ - 63¾ 1390-980-1620	78 - 38¾ - 63¾ 1390-980-1620	54¾ - 38¾ - 63¾ 1390-980-1620	78 - 38¾ - 63¾ 1390-980-1620
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigerated display area	Type	Deck / Shelves	Deck / Shelves	Deck / Shelves	Deck / Shelves
Operating temperature	°C / °F	+4 / 39.2	+4 / 39.2	-20 / 39.2	-20 / 39.2
Compressor	nr. / Type	1 / hermetic	1 / hermetic	1 / semi-hermetic	1 / semi-hermetic
Cooling power *	(W)	930	1160	1400	1780
Electric supply	(V/ph/Hz)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)	400/3/50 +N (UE) 230-208/3/60 (USA)	400/3/50 +N (UE) 230-208/3/60 (USA)
Power consumption	(W/A)	1000/5,8	1200/8,5	3800/9,0	4700/12,5
Defrost	Mode / type	electric	electric	invert cycle	invert cycle
Climatic class	N°/°C(F°)/H.R.	4+/35(95)/70%	4+/35(95)/70%	4+/35(95)/70%	4+/35(95)/70%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net weight	Kg / Lb	170 / 374	220 / 485	170 / 374	220 / 485
Crated weight	Kg / Lb	260 / 573	340 / 749	260 / 573	340 / 749

STANDARD FEATURE

- LED lighting system
- Front, top and side double glasses
- Remote condensing unit

OPTIONAL

- Dual temperature switch (-20°C / +4°C) (-4°F / +39.2°F)

* At -12°C of expansion for Cold version
At -37°C of expansion for Frozen version

The company reserves the right to make modifications to the products without prior notice.

CIAM s.p.a. | Viale dei Pini 9 | 06081 | Petignano di Assisi | PG - Italy | Tel: 0039 07580161
web: www.ciamweb.it | mail: info@ciamgroup.it

2017 / v1.0