





Gelato GS Showcase

Frontal heated double-glazed glass, upward servo-assisted opening | sides in heated double-glazed glass and with mirror screen printing | laminated heated glass top | bright aluminium mirror profiles | no-spot 3000°K led lighting | operator compartment with PETG easy sliding | Tank insulated with ecological polyurethane and covered in stainless steel | ventilated refrigeration with double airflow | reverse cycle defrosting | electronic control unit and digital temperature reader flush with the worktop | worktop in polished steel | pre-arrangement for transparent pans dim. 14 ³/₁₆ X 6 ¹/₂ X 4 ³/₄ [360x165x120] not supplied | supporting frame in galvanized steel with height adjustable stainless steel feet



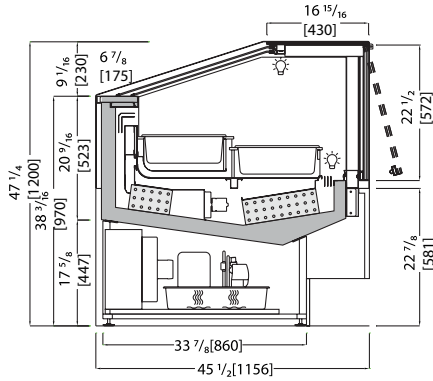

Technical



- Ventilated
- R452A
- Semi-Hermetic
- Led 3.000°K
- Automatic/reverse cycle
- N. 4 / RH 55% max 75 °F
- 220 V / 3 ph / 60 Hz
- 0°F

Data Sheet *Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation *Create weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU / °F	GAS Type
ICQGS1GEL121 (+PANELS)	45 1/4x45 1/2x47 1/4 52 3/8x52 5/8x58 11/16	639 298	1800/4,5	1	2730 / -32.8	R452A
ICQGS1GEL181 (+PANELS)	64 15/16x45 1/2x47 1/4 72 1/16x52 5/8x58 11/16	794 408	2800/7,0	1,3	3856 / -32.8	R452A
ICQGS1GEL241 (+PANELS)	84 5/8x45 1/2x47 1/4 91 3/4x52 5/8x58 11/16	1014 518	3400/8,5	1,8	4913 / -32.8	R452A
CQGS1GEL12+121 (+PANELS)	84 5/8x45 1/2x47 1/4 91 3/4x52 5/8x58 11/16	1036 518	3600/10,0	1,9	2730+2730 / -32.8	R452A

Optionals:

- GSG01
Stick ice-cream rack
- CIV61T
Transparent pan mm.360x165x120H
- CIV63T
Transparent pan mm.360x250x80H
- SPV01
Plexiglass pans holder
- GSG02
Perspex pan
- CIV56
s/s dipper well
- CIT37
Converter device from 0° to 39.2°F
- CIT46
Remote assistance
- CIM08
Kit wheels