

MYA NARROW PASTRY



FINISHING



FEATURES



COLORS



KEY FEATURES



- **Visibility:** extraordinary enhancement of displayed products
- **Practicality:** pistons assisted front glass opening system
- **Customizable:** great possibility to customize front side panels
- **Double glazing:** front, top and side glasses
- **Energy Saving:** double LED lighting as standard
- **Multiplexing:** combine easily Mya, Mya Narrow, Mya Combi, Mya Plus together on a continuous solution

MYA

MYA COLLECTION: CIAM's spearhead production. It is the perfect synthesis of PERFORMANCE, ERGONOMICS, ENERGY SAVING, DISPLAYED PRODUCT VISIBILITY. High performance maintains the product even in the worst ambient condition. You will be surprised by MYA's performance. MYA cabinets are tested in class 4+ (35°C / 70% HR): even in the worst ambient condition, MYA cabinets can ensure a perfect food preservation. All the upper glass structure of MYA's cabinets is realized in double glazing, to avoid the fog even in high relative humidity conditions.

CIAM
REFRIGERATION DESIGN

Distributed By
AG ADVANCED GOURMET
IN THE USA

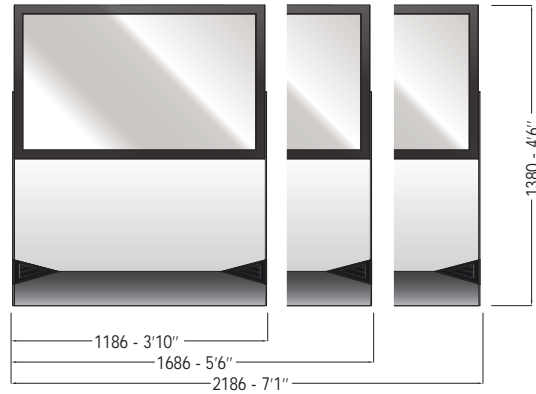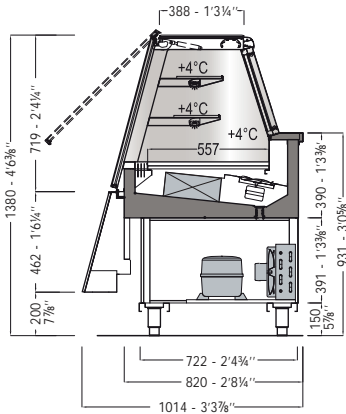

MYA NARROW - PASTRY

| TECHNICAL FEATURE | | VERSIONS | | | |
|-----------------------------|---------------|---|---|---|---|
| | | 1150 | 1650 | 2150 | 45° Open Corner |
| External dimensions (L-D-H) | inches mm | 46 1/4" - 39 7/8" - 54 1/3" 1186 - 1014 - 1380 | 65 1/2" - 39 7/8" - 54 1/3" 1686 - 1014 - 1380 | 85 2/3" - 39 7/8" - 54 1/3" 2186 - 1014 - 1380 | 85 2/3" - 39 7/8" - 54 1/3" 2186 - 1014 - 1380 |
| Crated dimensions (L-D-H) | inches mm | 52 3/8" - 47 1/4" - 63" 1330-1200-1600 | 72" - 47 1/4" - 63" 1830-1200-1600 | 91 3/4" - 47 1/4" - 63" 2330-1200-1600 | 91 3/4" - 47 1/4" - 63" 2380-1200-1600 |
| Refrigeration | Type | Fan Ventilated | Fan Ventilated | Fan Ventilated | Fan Ventilated |
| Refrigerated display area | Type | Deck / Shelves | Deck / Shelves | Deck / Shelves | Deck / Shelves |
| Operating temperature | °C / °F | +4 / 39.2 | +4 / 39.2 | +4 / 39.2 | +4 / 39.2 |
| Compressor | nr. / Type | 1 / hermetic | 1 / hermetic | 1 / hermetic | 1 / hermetic |
| Cooling power * | (W) | 930 | 1160 | 1440 | 1100 |
| Electric supply | (V/ph/Hz) | 230/1/50 (UE) 120/1/60 (USA) | 230/1/50 (UE) 120/1/60 (USA) | 230/1/50 (UE) 120/1/60 (USA) | 230/1/50 (UE) 120/1/60 (USA) |
| Power consumption | (W/A) | 1000/5,8 | 1200/8,5 | 1600/9,0 | 1015/6,8 |
| Defrost | Mode / type | electric | electric | electric | electric |
| Climatic class | N°°C(F°)/H.R. | 4+ /35 (95)/70% | 4+ /35 (95)/70% | 4+ /35 (95)/70% | 4+ /35 (95)/70% |
| Refrigerant Gas | Type | R452A | R452A | R452A | R452A |
| Net weight | Kg / Lb | 266 / 586 | 350 / 771 | 430 / 992 | 330 / 727 |
| Crated weight | Kg / Lb | 391 / 862 | 525 / 1157 | 650 / 1433 | 575 / 1267 |

* At -10°C of expansion

The company reserves the right to make modifications to the products without prior notice.

CIAM s.p.a. | Viale dei Pini 9 | 06081 | Petignano di Assisi | PG - Italy | Tel: 0039 07580161
web: www.ciamweb.it | mail: info@ciamgroup.it

2017 / v1.0