

TORTUGA PASTRY



FEATURES



COLORS



KEY FEATURES

- Maxi display volume
- Three different heights
- Perfect control of temperature all over the display volume
- Sliding double glazed door closure on the operator side
- LED lighting as standard
- Electronic control board

TORTUGA


Fully refrigerated pastry showcase (+4°C). Available in three different height. Display structure completely realized in double glazed with self-closing doors on the operator side. Glass shelves with shining S/S adjustable brackets. No wire LED light on the top and inside each shelf.

CIAM
REFRIGERATION DESIGN

Distributed By
AG ADVANCED GOURMET
IN THE USA

TORTUGA PASTRY

SECTIONS AND MODELS

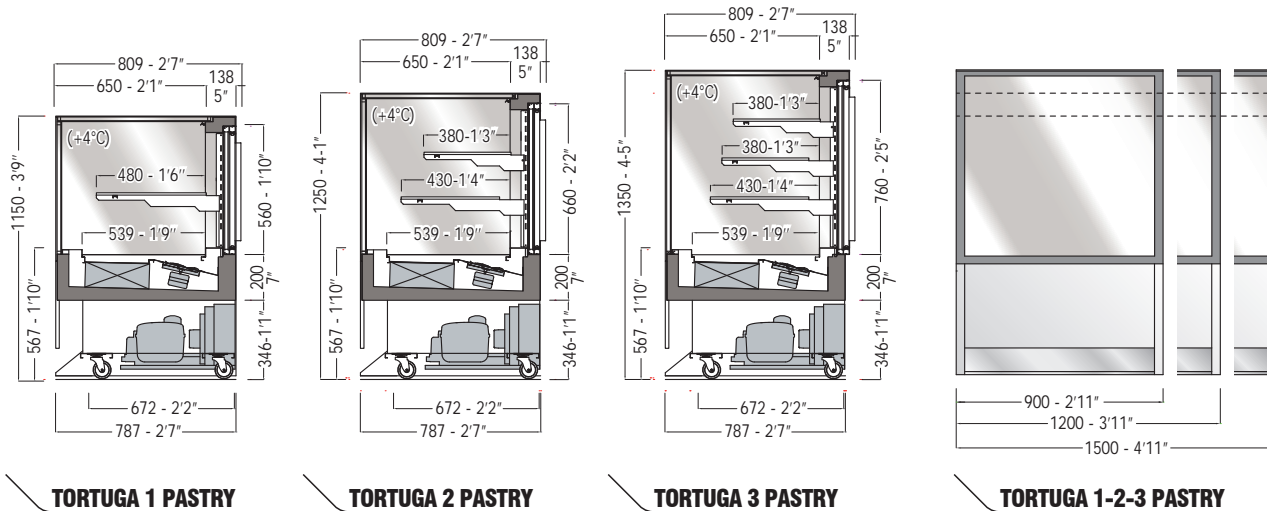

STANDARD FEATURE

Ventilated refrigeration | Full volume temperature control | LED Lighting system | Double glazed walls | Sliding doors on the operator side | Electronic temperature control | Automatic evaporation system of condensate water | Castors

OPTIONAL

- Remote condensing unit

TECHNICAL FEATURE		TORTUGA 1			TORTUGA 2			TORTUGA 3		
		0900	1200	1500	0900	1200	1500	0900	1200	1500
External dimensions (L-D-H)	inches mm	35 3/8 - 31 7/8 - 45 1/4 904-809-1150	47 3/8 - 31 7/8 - 45 1/4 1204-809-1150	59 1/4 - 31 7/8 - 45 1/4 1504-809-1150	35 3/8 - 31 7/8 - 49 1/4 904-809-1250	47 3/8 - 31 7/8 - 49 1/4 1204-809-1250	59 1/4 - 31 7/8 - 49 1/4 1504-809-1250	35 3/8 - 31 7/8 - 53 1/8 904-809-1350	47 3/8 - 31 7/8 - 53 1/8 1204-809-1350	59 1/4 - 31 7/8 - 53 1/8 1504-809-1350
Crated dimensions (L-D-H)	inches mm	43 3/8 - 39 3/8 - 55 1/8 1100-1000-1400	55 1/8 - 39 3/8 - 55 1/8 1400-1000-1400	66 7/8 - 39 3/8 - 55 1/8 1700-1000-1400	43 3/8 - 39 3/8 - 59 1100-1000-1500	55 1/8 - 39 3/8 - 59 1400-1000-1500	66 7/8 - 39 3/8 - 59 1700-1000-1500	43 3/8 - 39 3/8 - 63 1100-1000-1600	55 1/8 - 39 3/8 - 63 1400-1000-1600	66 7/8 - 39 3/8 - 63 1700-1000-1600
Refrigeration	Type	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Refrig. display area	Type	Deck / Shelves	Deck / Shelves	Deck / Shelves	Deck / Shelves	Deck / Shelves	Deck / Shelves	Deck / Shelves	Deck / Shelves	Deck / Shelves
Operating temp.	°C / °F	+4 / 39.2	+4 / 39.2	+4 / 39.2	+4 / 39.2	+4 / 39.2	+4 / 39.2	+4 / 39.2	+4 / 39.2	+4 / 39.2
Compressor	nr./Type	1 / hermetic	1 / hermetic	1 / hermetic	1 / hermetic	1 / hermetic	1 / hermetic	1 / hermetic	1 / hermetic	1 / hermetic
Cooling power	(W)	600	830	1000	640	870	1100	670	900	1200
Electric supply	(V/ph/Hz)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)
Power consumption	(W/A)	580 / 3,2	600 / 3,1	900 / 5,1	600 / 3,1	860 / 5,1	910 / 5,1	650 / 3,5	880 / 5,1	1000 / 6,0
Defrost	Mode/type	automatic	automatic	automatic	automatic	automatic	automatic	automatic	automatic	automatic
Climatic class	N°/°C (F°)/H.R.	3/25(77)/60%	3/25(77)/60%	3/25(77)/60%	3/25(77)/60%	3/25(77)/60%	3/25(77)/60%	3/25(77)/60%	3/25(77)/60%	3/25(77)/60%
Refrigerant Gas	Type	R452A	R452A	R452A	R452A	R452A	R452A	R452A	R452A	R452A
Net weight	Kg / Lb	100 / 220	130 / 286	160 / 352	115 / 253	150 / 330	180 / 396	130 / 286	170 / 374	200 / 440
Crated weight	Kg / Lb	160 / 352	210 / 462	225 / 496	185 / 407	235 / 518	280 / 617	202 / 445	260 / 454	310 / 683

* At -10°C of expansion

The company reserves the right to make modifications to the products without prior notice.

CIAM s.p.a. | Viale dei Pini 9 | 06081 | Petignano di Assisi | PG - Italy | Tel: 0039 07580161
web: www.ciamweb.it | mail: info@ciamgroup.it

2017 / v1.0

TORTUGA



CIAM
REFRIGERATION DESIGN

Distributed By
AG ADVANCED GOURMET
IN THE USA