

GLASSES

- Standard
- Heated stratified glass side
- Mirror screen-printing
- Heated front glass (no baffle)

INTERIORS

- Standard
- polish s/s


PANELS


- Standard
- HPL black / white / gray
- Optional
- HPL RAL



Gelato Showcase

Single front glass heated and downward opening | sides in laminated glass heated with mirror screen printing | bright aluminium profiles | no spot 3000°K led lighting | operator compartment with PETG easy sliding | tank insulated with ecological polyurethane and covered in stainless steel | ventilated refrigeration | reverse cycle defrost | electronic control unit and digital temperature reader flush with the worktop | worktop in polished stainless steel | pre-arrangement for pans 5lt dim. 14 3/16 x 6 1/2 x 3/4 [360 x 165 x 120] not supplied | backlit ice cream flavor tags | supporting frame in galvanized steel with height adjustable stainless steel feet



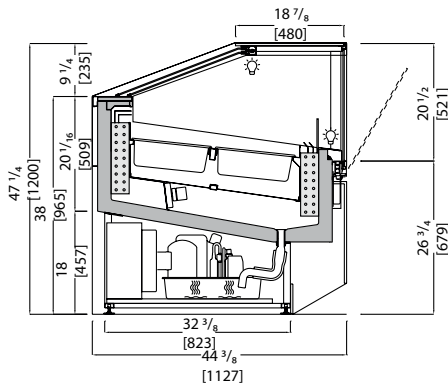

Technical



- Ventilated
- Automatic/reverse cycle
- R452a
- N. 4 / RH 55% max 75 °F
- Semi-Hermetic
- 220 V / 3 ph / 60 Hz
- Led no-spot 3000°K
- 0°F

Data Sheet *Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation *Crate weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU/F	GAS Type
VRT1GEL121	43 11/16 x 44 3/8 x 47 1/4 50 13/16 x 51 7/16 x 58 11/16 278	551	1800/4,3	0,9	2730 / -32.8	R452A
VRT1GEL181	63 3/8 x 44 3/8 x 47 1/4 70 1/2 x 51 7/16 x 58 11/16 386	705	2700/7,2	1,3	3856 / -32.8	R452A
VRT1GEL241	82 15/16 x 44 3/8 x 47 1/4 90 x 51 7/16 x 58 11/16 496	882	3400/9,0	1,7	4879 / -32.8	R452A
VRT1GEL12+121	82 15/16 x 44 3/8 x 47 1/4 90 x 51 7/16 x 58 11/16 496	904	3500/9,0	1,7	2730+2730 / -32.8	R452A

Optionals:

- PVP01-03 Epoxy painted profiles
- CIV56 s/s dipper well
- GSG01 Stick ice-cream rack
- GSG02 Perspex pan
- CIV63 s/s pan mm. 14 3/16 x 9 13/16 x 3 1/8
- CIV61 s/s pan mm. 14 3/16 x 6 1/2 x 4 3/4
- CIV18-20 Roller night blind
- CIT37 Converter device from 0°F to 39.2°F
- CIT46 Remote assistance