


# STEEL SLIDING DOORS & FIXED WINDOWS INSTALLATION GUIDE

## 03 7068 7667

admin@zenbg.com.au zendoors.com.au

### ZEN STEEL CAVITY SLIDING DOOR / CAD DRAWING

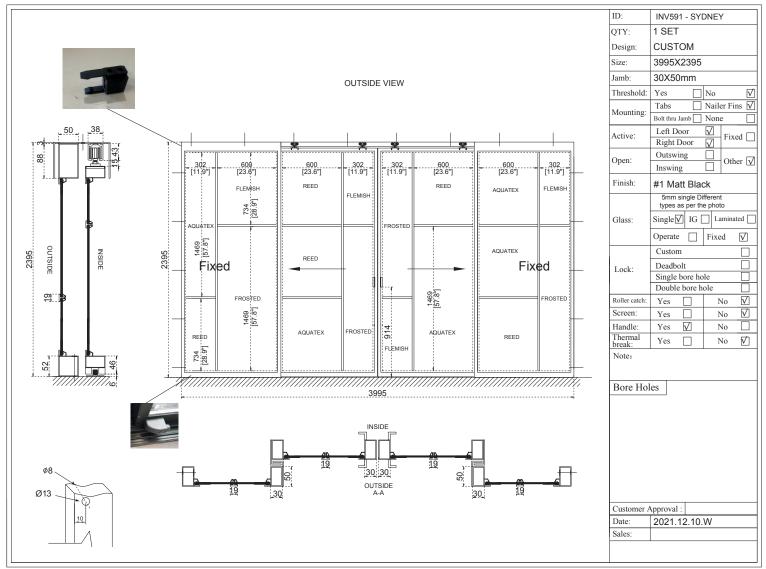

#### 1. SLIDING DOUBLE DOORS & FIXED WINDOWS - INSTALLING THE COVER AND TRACK

Install the steel cover plate into the opening by fixing screws through the top into structural opening.

First, install the sliding track to the above timber frame opening. You will need to drill the required holes in the track based on the overall length of track. Use timber screws to fix frame in to place.

**NOTE**: Make sure the track is screwed to the top timber framing perfectly level with the wheels and stoppers already installed in the track.

The steel door panels in single glazing are approx 35kg per sqm.

Your fixed panels are fitted within the cover also at the top and on the sides to the structural opening via pre drilled mounting holes, there should be caps supplied to cover the holes after you have screwed the frame in.

#### 2. SLIDING DOUBLE DOORS & FIXED WINDOWS - INSTALLING THE DOORS & FIXED WINDOWS

Your fixed panels are fitted within the cover also at the top and on the sides to the structural opening via pre drilled mounting holes, there should be caps supplied to cover the holes after you have screwed the frame in.

Install the door panels onto the wheels via the pre drilled holes at the top of the door. The door has been tested and these holes should match up with the provided wheel assembly.

Adjust the wheels and door height to suit the opening.

Install your floor guides down to the flooring underneath in line with the track above so the doors are straight and can travel in a straight line and overlap the fixed panel on either side.