

PROBEAM[®]

BY CUSTOM DYNAMICS[®]

P/N: PB-BCM-KIT1

We thank you for purchasing the Custom Dynamics[®] ProBEAM[®] BCM COMPLIANT TURN SIGNAL CONVERSION KIT (1157 REAR, 1157 FRONT) LED turn signals! Our LEDs offer maintenance free service and higher visibility. Our ProBEAM[®] product line utilizes the latest technology and automotive grade components to ensure the highest level of reliable service. Custom Dynamics[®] offers one of the best warranty programs and customer support in the industry. If you have any questions during the installation of this product please call us at 1(800) 382-1388.

Package Contents:

- Front 1157 LED Turn Signals: Choice of Amber/ White w/ Smoke lens or Amber w/ Amber Lens (1pr)
- Rear 1157 LED Turn Signals: Choice of Red Ring or Solid Red w/ Red Lens (1pr)

US Patent 830597, 830595, 830596, 851817, 851327

Chinese Patent ZL-201830045649.4, ZL-201830409102.8, ZL-201830409095.1, Other Patent Pending

Fitment: 2014-2023 Harley-Davidson[®] Street Glide (FLHX), Street Glide Special (FLHXS), 2015-2023 Road Glide (FLTRX), Road Glide Special (FLTRXS) and 2017-2024 Road King Special (FLHRXS), 2018-2023 Fat Bob (FXFB/FXFBS), 2018-2024 Street Bob (FXBB/FXBBS), Fat Boy (FLFB/FLFBS), 2020-2024 Softail Standard (FXST), 2018-2021 Slim (FLSL), 2018-2020 Breakout (FXSB/FXSR) and 2023-2024 Breakout 117 (FXBR), 2011-2017 Blackline (FXS), Slim (FLS), Slim S (FLSS), Breakout (FXSB), Street Bob (FXDB), 2012-2017 Dyna Wide Glide (FXDWG), Low Rider S (FXDLS), 2014-2022 XL883N, XL1200X, XL1200V, XL1200CX, XL1200NS, 2011-2012 CVO[™] Softail Convertible (FLSTSE2), 2014-2015 CVO[™] Softail Deluxe (FLSTNSE), and 2014 CVO[™] Breakout (FXSBES).



ATTENTION

Please read all Information below before Installation

Note:

- Use care in removing the OEM lens and bulbs from the housing, so as not to scratch or mar the chrome housing. Custom Dynamics[®] is not liable for damage to chrome housing during installation.
- Dielectric grease does not need to be used with this LED product, it can actually prevent them from working. Remove any excess grease from your turn signal sockets before inserting.

IMPORTANT

This LED product is BCM compliant. However, you must run the 4 way hazard flashers for 3 minutes with ignition switch in the "OFF" position to allow the BCM to sync the new LED turn signals after they are installed.

Installation:

1. Remove the existing lens from turn signal housing. Use care in removing the OEM lens and bulbs from the housing, so as not to scratch or mar the chrome housing.
2. Remove existing bulb from turn signal housing.
3. Remove any corrosion or dielectric grease from the socket to insure the socket contacts are clean.
4. Using a small flat blade screwdriver, go around the perimeter of the reflector and slightly push the black gasket into the housing to allow proper clearance of the new LED turn signal. (see Figure 1)
5. Confirm the proper orientation of the socket base and insert the base into the socket. If it seems hard to twist the base in the socket or hard to remove, it is probably orientated the wrong way.
6. Twist the LED turn signal a few rotations to coil wire from the turn signal to the socket base. Insert LED turn signal into housing and install new lens.
7. Confirm lens is installed correctly to prevent excess moisture or water from entering the turn signal housing (see back page).
8. Check operation of turn signal in all modes.

Caution: If there is a gap between the lens and the housing, water will leak into the unit and cause damage, be sure the lens is fully seated all the way around the perimeter.



PREVENTING WATER DAMAGE



SEE BACK OF PAGE

Figure 1



Questions? Email: info@CustomDynamics.com or Call us at: 1 (800) 382-1388 M-TH 8:30AM-5:30PM / FR 9:30AM-5:30PM EST



PREVENTING WATER DAMAGE



Custom Dynamics® ProBEAM® LED Turn Signals are coated with a thick layer of conformal coating which protects the circuit board from a normal amount of moisture or water damage. Follow the steps below to ensure your new ProBEAM® LED turn signal is installed properly to prevent excess moisture or water from entering the turn signal housing.


1. ProBEAM® turn signals are installed with lenses provided by Custom Dynamics® included in original packaging.
2. The lens is fully seated against the turn signal housing when installed; there are no gaps between the turn signal housing and the lens all the way around the perimeter.
3. The notch built into the lens is oriented towards the bottom of the turn signal housing. (See image 2 & 3 below)



Caution



- When inserting the base use the proper sized 5/16" Flathead screwdriver. Using too small of a screwdriver will damage the base and void the warranty.
- If there is a gap between the lens and the housing, water will leak into the unit and cause damage, be sure the lens is fully seated all the way around the perimeter.
- If the lens will not fully seat on the housing, it may be necessary to trim any excess gasket with a small flat blade screw driver. Refer to image 4 below.
- Do not use the lens if any of the tabs are broken, doing so may cause water to enter the housing.
- Do not install the lens without the ProBEAM lens gasket in place, doing so will cause water to leak into the housing.

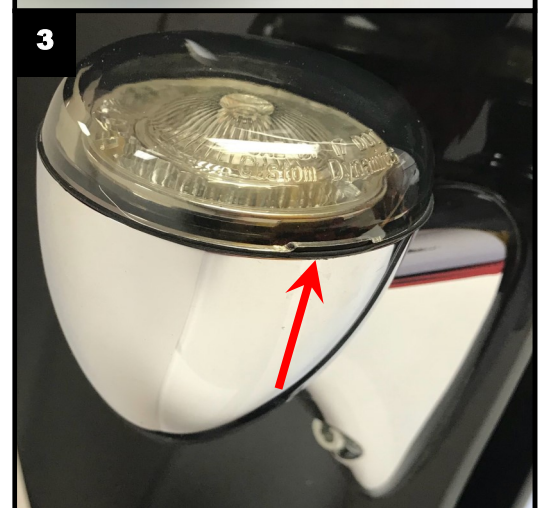

Custom Dynamics® is not liable for damage to product as a result of incorrect installation.

Questions? Email: info@CustomDynamics.com or Call us at: 1 (800) 382-1388 M-TH 8:30AM-5:30PM / FR 9:30AM-5:30PM EST