


# SPEEDY BAND


Universal single-sided tape without separation layer

Polyethylene (PE) support with acrylic glue and reinforcing grid

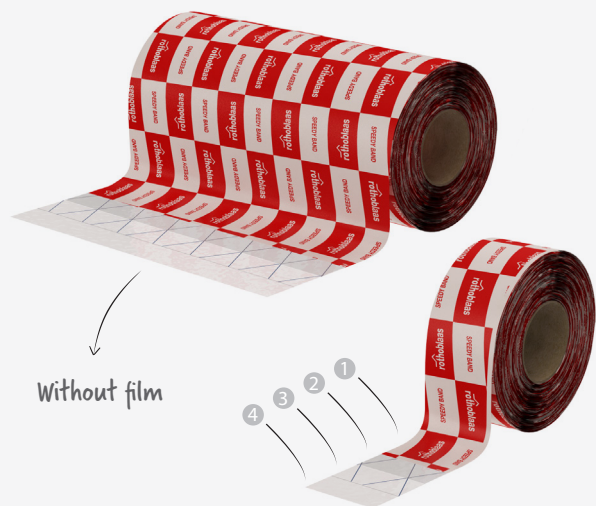



## FAST INSTALLATION

Can be used both externally and internally, guarantees fast and secure sealing on the most common supports



## SUSTAINABLE

The lack of separation layer means less waste

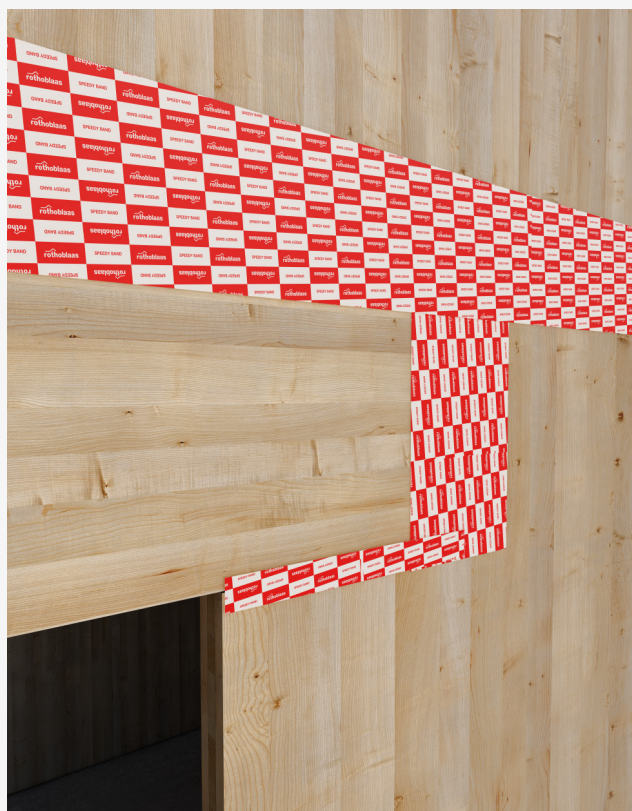

## TECHNICAL SPECIFICATIONS

property	standard	value
Total thickness	AFERA 5006	0,25 mm
Adhesiveness on steel	AFERA 5001	> 27,5 N/25 mm
Adhesiveness on polyethylene	EN 12316-2	> 12,5 N/25 mm
Water vapour transmission (Sd)	EN 1931	40 m
Temperature resistance	-	-40 / +80 °C
Application temperature	-	-10 / +40 °C
UV resistance	-	6 months
Watertightness	-	conforming
Storage temperature	-	+5 / +25 °C
Solvents	-	NO
VOC emissions	-	0 % (class A+)

NOTE: Store the product in a dry, covered location

## CODES AND DIMENSIONS

code	ex code	B [mm]	L [m]	pcs/box
<b>SPEEDY60</b>	D52124	60	25	10
<b>SPEEDY300</b>	-	300	25	2

## COMPOSITION

- ① support: PE film
- ② glue: acrylate dispersion without solvents
- ③ reinforcing layer: reinforcing PE grid
- ④ glue: acrylate dispersion without solvents