


# DOUBLE BAND


Universal double-sided tape

Polyethylene (PE) reinforcing grid and acrylic glue

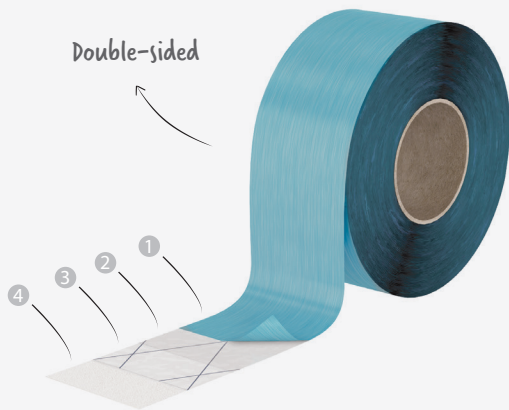




## UNIVERSAL

Excellent double-sided adhesion on all types of material and under all environmental conditions



## SECURE

Not too thick, it guarantees stability when exposed to temperature changes thanks to the reinforcing grid

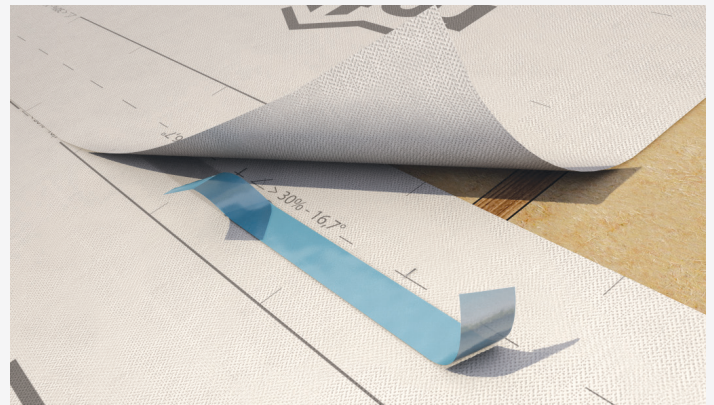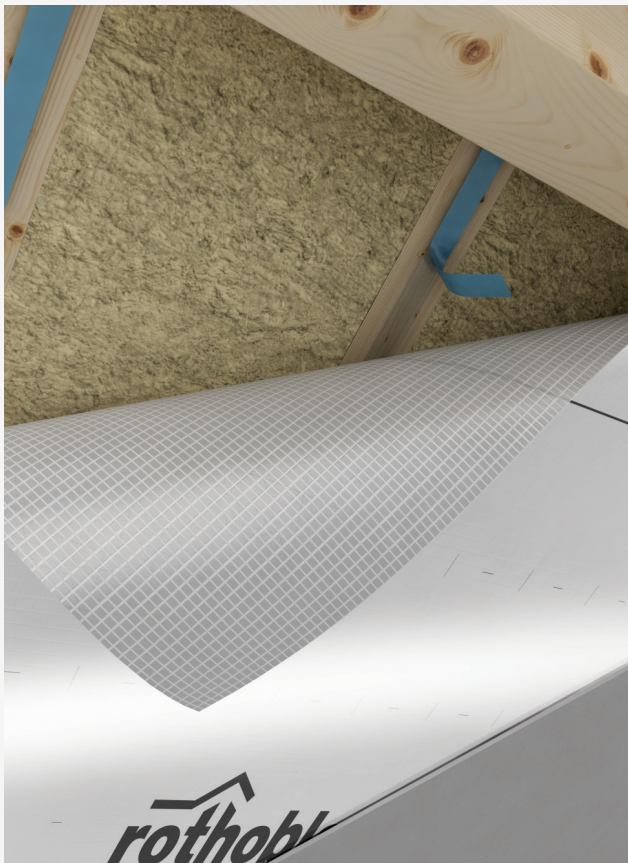

## TECHNICAL SPECIFICATIONS

property	standard	value
Total thickness	DIN EN 1942	0.25 mm
Adhesiveness	DIN EN 1939	> 25 N/25 mm
Temperature resistance	-	-30 / +100 °C
Application temperature	-	-10 / +40 °C recommended > +5 °C
Watertightness	-	conforming
Storage temperature	-	+5 / +25 °C
Solvents	-	NO
VOC emissions	-	< 0.02 % (class A+)

NOTE: Store the product in a dry, covered location

## CODES AND DIMENSIONS

code	ex code	B [mm]	L [m]	pcs/box
<b>DOUBLE40</b>	D52712	40	50	16

## COMPOSITION

- 1 separation layer: silicone paper
- 2 glue: acrylate dispersion without solvents
- 3 reinforcing layer: reinforcing PE grid
- 4 glue: acrylate dispersion without solvents