

Mansour House, 188 Bath Road  
Slough SL1 3GA, Berkshire, UK

## 1.1 CATERPILLAR PACKAGE GENSET TYPE:C13-350KVA Prime



### 1.1.1 Engine Technical Data:

Maker:	Caterpillar Inc.
Type Of Engine:	Four-Stroke, Diesel Fuel
Application:	Power Generation, Prime Power.
Cylinders Arrangement:	Inline-Type
No. Of Cylinders:	6 Cylinder
No. Of Strokes:	four Strokes
Bore:	130.00 mm
Stroke:	157.00mm
Displacement:	12.50 L
Aspiration:	Air-to-Air After-cooled
Compression Ratio:	16.3: 1
Genset Output:	350KVA - 280eKW
Revolutions Per Minute:	1500 RPM

Mansour House, 188 Bath Road  
Slough SL1 3GA, Berkshire, UK

### **1.1.2 Air Inlet System:**

- Air cleaner; dual element.
- (Not for Outdoor Use. Requires protection for outdoor storage)
- Aftercooler core.
- Turbocharger.

### **1.1.3 Exhaust System**

- Dry exhaust manifold
- Canopied Silencer

### **1.1.4 Fuel System**

- Primary fuel filter w/integral water separator & secondary filter
- Fuel cooler steel with single wall integral 8-hour fuel tank
- Fuel priming pump
- Flexible fuel lines
- Engine fuel transfer pump

### **1.1.5 Starting System**

- Battery with rack & cables
- Battery Charger 5 Amp

### **1.1.6 Cooling System:**

- Radiator and cooling fan with guard
- Coolant drain line with valve
- Fan drive, battery charging alternator drive
- Caterpillar Extended Life Coolant

### **1.1.7 Lubrication System:**

- Lubricating oil
- Oil drain valves

### **1.1.8 Governing System:**

- Cat Electronic Governor (ADEM IV).

### 1.1.9 Mounting System:

- Captive linear vibration isolators between base and engine-generator
- Includes lifting provisions and termination points for coolant and lube oil drain lines

### 1.1.10 Generator Technical Data:

Rating:	350kVA , 280eKw @ 0.8 P.F.
Voltage:	400 Volts
Frequency:	50 Hz
Speed:	1500 RPM
Insulation:	Class "H"
No. of Bearing:	Single Bearing
Excitation:	Self-Excited
Over Speed Capability:	150% of Synchronous speed
Wave Form:	Less than 2% deviation
Voltage Regulator:	Integrated Voltage Regulator
Voltage Regulation:	Less than $\pm 1\%$ (steady state)
Circuit breaker:	630 amp, 3 pole

### 1.1.11 Control Panel:


Generator - mounted, EMCP4.2, The Cat® EMCP 4.2 offers fully featured power metering, protective relaying and engine and generator control and monitoring. Engine and generator controls, diagnostics, and operating information are accessible via the control panel keypads  
Electronic Modular Control Panel 4.2 includes the followings:

#### 1.1.1.1 **CONTROLS:**

- Run / Auto / Stop control
- Speed and voltage adjust
- Local and remote emergency stop
- Remote start/stop
- Cycle crank

#### 1.1.1.2 **MONITORING:**

- Coolant temperature
- Oil pressure
- Engine speed (RPM)

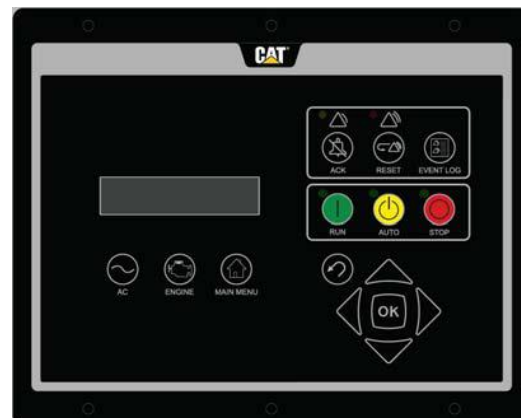

Mansour House, 188 Bath Road  
Slough SL1 3GA, Berkshire, UK

- Battery voltage
- Run hours
- Crank attempt and successful start counter
- Voltage (L-L, L-N)
- Current (Phase)
- Average Volt, Amp, Frequency
- kW, kVAr, kVA (Average, Phase, %)
- Power Factor (Average, Phase)
- kW-hr, kVAr-hr (total)

#### 1.1.1.3 WARNING/SHUTDOWN INDICATION:

- Control switch not in auto (alarm)
- High coolant temp (alarm and shutdown)
- Low coolant temp (alarm)
- Low coolant level (alarm)
- Low Oil Pressure (alarm and shutdown)
- High engine oil temp (alarm and shutdown)
- Low, high and weak battery voltage
- Over speed shutdown
- Over crank

#### 1.1.1.4 INPUTS & OUTPUTS:

- Two dedicated digital inputs
- Six programmable digital inputs
- Six programmable form A dry contacts
- Two programmable form C dry contacts
- Two digital outputs

#### 1.1.1.5 PROTECTIVE RELAYING:

- Generator phase sequence
- Over/Under voltage (27/59)
- Over/Under frequency (81 O/U)
- Reverse Power (kW) (32)
- Reverse Reactive Power (kVAr) (32RV)
- Overcurrent (50/51)

#### 1.1.1.6 COMMUNICATION

- Primary and accessory CAN data links
- RS-485 annunciator data link
- Modbus RTU (RS-485 Half duplex)

### 1.1.12 Sound Attenuated Enclosure:

Sound Pressure Level dBA @ Full Load (Prime Power) = 70 ±3dBA@7m

These sound attenuated, factory installed enclosures incorporate internally mounted super critical level silencers, designed for safety and aesthetic value on integral fuel tank base or optional dual wall integral fuel tank base for total fluid containment. These enclosures are of extremely rugged construction to withstand exposure to the elements and provide weather protection



#### Features

#### **ROBUST/HIGHLY CORROSION RESISTANT CONSTRUCTION**

- Factory installed on integral fuel tank base
- Environmentally friendly, polyester powder baked paint
- 1.6mm (0.063in) galvanized steel
- All round overhanging bases to protect enclosure
- High-grade engineering thermoplastic corner posts for protection
- Integral lifting frame
- Compression door latches giving solid door seal
- Zinc plated or black coated stainless steel fasteners
- Internally mounted super critical exhaust silencing system

#### **Excellent Access**

- Large cable entry area for installation ease
- Accommodates rear mounted breaker and control panel
- Double doors on both sides
- Vertically hinged doors with solid bar door stays to hold doors open at 135° rotation
- Lube oil and coolant drains pipes to exterior of enclosure and terminated drain valves
- Radiator fill cover

#### **SECURITY AND SAFETY**

- Lockable access doors which give full access to control panel and breaker
- Cooling fan and battery charging alternator fully guarded
- Fuel fill, oil fill and battery can only be reached via lockable access
- Externally mounted emergency stop button
- Designed for spreader-bar lifting to ensure safety
- Control panel viewing window