

Trim, Notch or fit your FUJI Mats around an obstacle:  
Use: Mat Cutting Jigsaw Blades for best results.


1. Make cuts last. Ensure your mats are all snugly fitted together.

2. Measure your pole or column and transfer the measurements to the mat that will be cut to fit. A drywall square and pencil works well.


3. Use an extendable knife or jigsaw to remove the material as marked. \*You may remove +/- an additional 1/2"-1" all around and shim to re-snug the fit. This makes the fit easier if you are covering the area with a pole pad.

4.a Make a single relief cut into the mat. The thinner the mat and the closer the cut is to the edge, the easier this will be. This is not possible for all cuts.

4.b Alternatively, remove a section to be replaced by making 2 cuts into the negative area of material [see below]

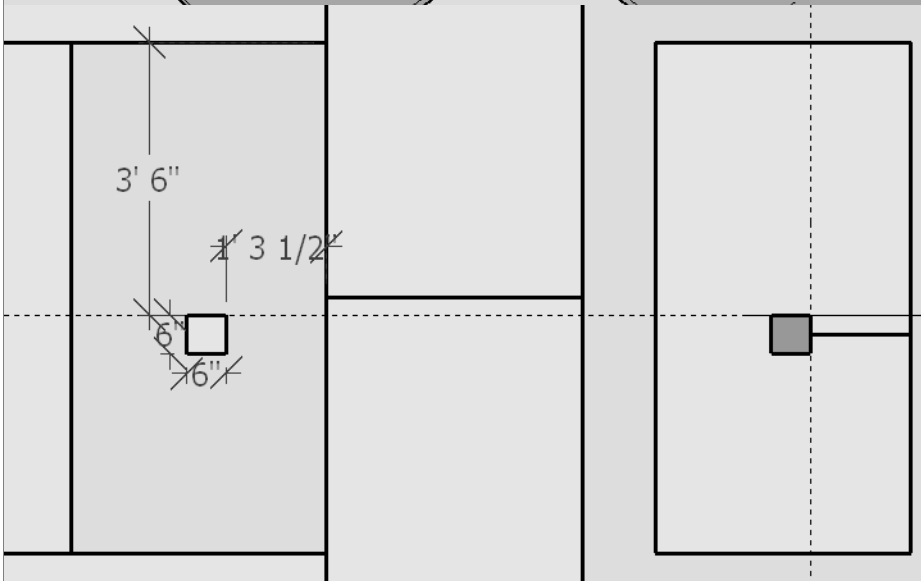

Single Relief Cut

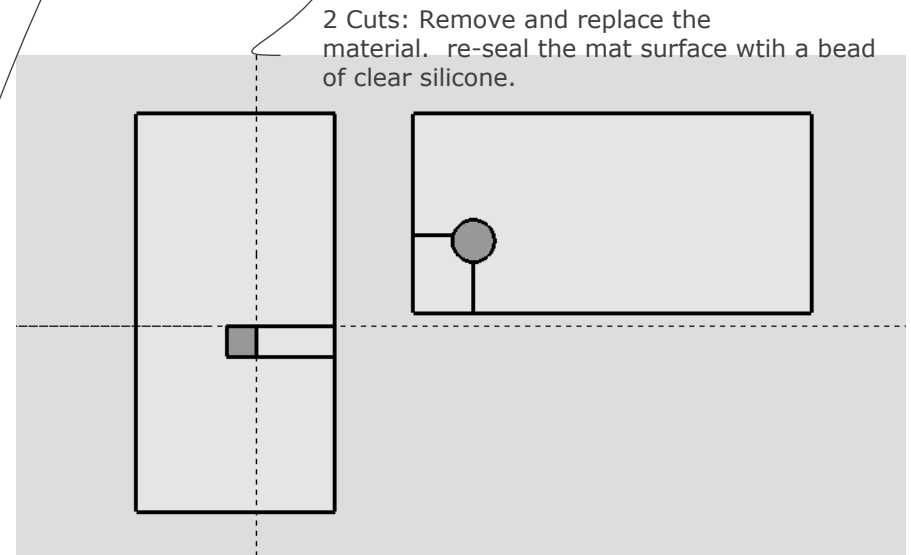

2 Cuts: Remove and replace the material. re-seal the mat surface with a bead of clear silicone.