



Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model: \_\_\_\_\_

## UNDERCOUNTER GLASSWASHER

MODEL:  G-1000



G-1000

This under counter glasswasher is ideal for bars, pubs, restaurants and hotels. Features a wide loading capacity granting the highest performance at a reasonable price.

### FEATURES AND CONSTRUCTION

- 30 racks per hour / 2 minute cycle
- 20 racks per hour / 3 minute cycle
- Built-in rinse-aid pump
- 85°C sanitizing rinse every cycle
- Built-in 4500 watt booster heater
- 2700 watt wash tank heater
- Low 2.3L (0.6 gal) water usage per rack
- Removable wash and rinse arms (upper and lower)
- Triple filtering system to capture soil and debris
- Top mounted controls easy to read and simple to operate
- Double skin stainless steel door with security micro-switch
- Cold Rinse Feature
- Heavy duty stainless steel construction. Internal cavity as well as exterior panels are in 304 series stainless steel
- Noise – 63 dB(A)
- Optional drain pump  
25W hMAX draining 0.8m (40L/min\*\*\*)

\*\*\*Maximum Flow Rate

#### RACK SIZES:

Dish Rack	20 in x 20 in	500mm x 500mm
Dish Max Height	12.5 in	320mm
Plates Diameter	13.625 in	345mm

#### WATER CONSUMPTION

Per Rack	0.60 (gal)	2.3 (L)
----------	------------	---------

#### OPERATING CYCLE:

Cycle 1	120 sec
Cycle 2	180 sec

#### OPERATING CAPACITY

Racks per hour	30 / 20
Wash Tank Capacity	7.6 (gal) 29 (L)
Booster Capacity	1.5 (gal) 5.7 (L)

#### CYCLE TEMPERATURES

Wash	155°F	68°C
Rinse	185°F	85°C

#### WATER REQUIREMENTS

Inlet Temperature	131°F	55°C
Inlet Water Pressure	25-60psi	1.8 – 4.2kg/cm <sup>2</sup>
Flow Pressure	15-25psi	1.0 – 1.8kg/cm <sup>2</sup>
Tank Temperature	155°F	68°C
Pump Power	650 W / 0.87HP (340L/min***)	

All specifications are dependent on water pressure and temperature


### 3RD PARTY APPROVALS



### BLAKESLEE WARRANTY (INTERNATIONAL)

Blakeslee dishwashers are warranted for one year from date of installation against defective materials and workmanship.

Contact Blakeslee USA for details at [service@blakesleeinc.com](mailto:service@blakesleeinc.com) or 630.532.5021

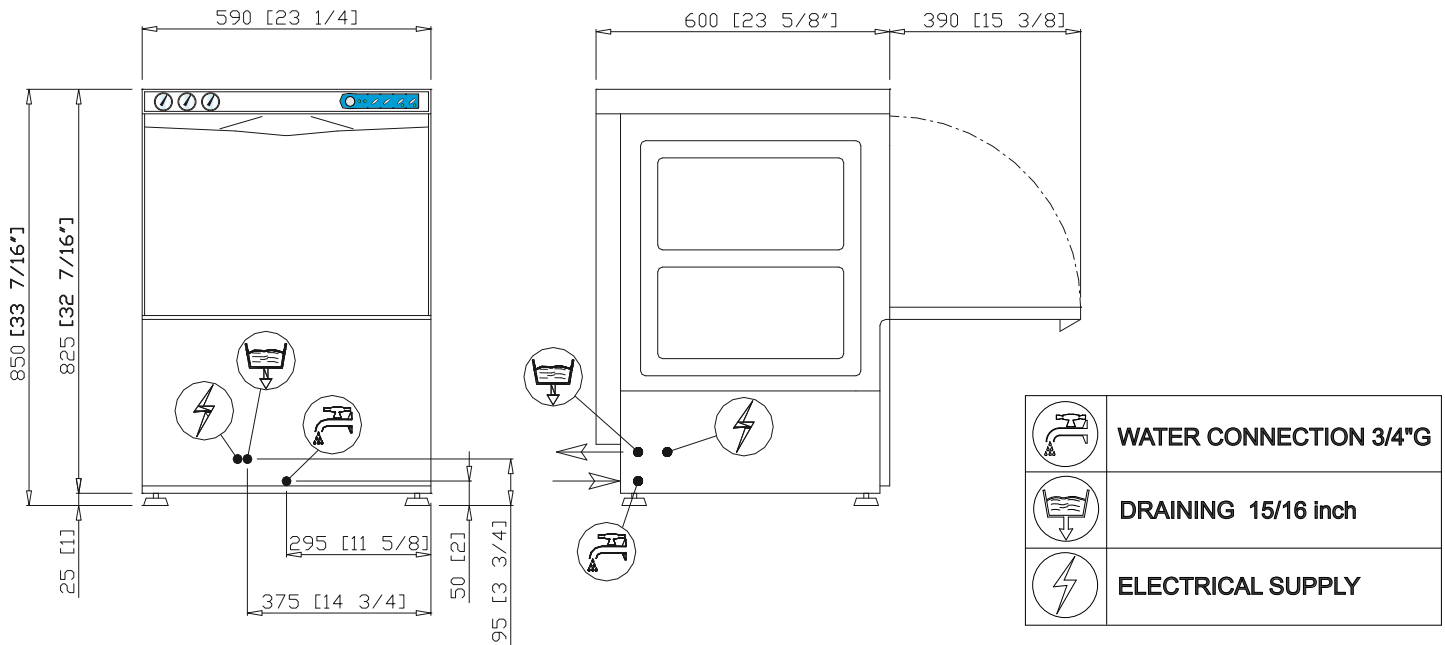

MODEL	SHIPPING DIMENSIONS	RACK SIZE	RACKS PER HOUR	ELECTRICAL	WATT POWER	SHIPPING WEIGHT
G-1000	34" x 30" x 44" (836 x 762 x 1118 mm)	20" X 20" (500 X 500mm)	30 / 20	220-240V/60Hz/1Ph	21.5A - 23.4A / 5,150 Watts	190 lbs (86.18 kg)

All specifications are dependent on water pressure and temperature