



Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model: \_\_\_\_\_

## UNDERCOUNTER DISHWASHER

MODEL:  UC-1000-1



UC-1000-1

### RACK SIZES:

Dish Rack	20 in X 20 in	500mm X 500mm
Dish Max Height	12.5 in	320mm
Plates Diameter	13.625 in	346mm

### WATER CONSUMPTION

Per Rack	0.6 gal/cycle	2.3L/cycle
----------	---------------	------------

### OPERATING CYCLES:

Cycle 1	120 sec
Cycle 2	180 sec

### OPERATING CAPACITY

Racks per hour	30 / 20	
Wash Tank Capacity	7.6 (gal)	28.8 (L)
Booster Capacity	1.5 (gal)	5.7 (L)

### CYCLE TEMPERATURES

Wash	155°F	68°C
Rinse	185°F	85°C

### WATER REQUIREMENTS

Inlet Temperature	140°F	60°C
Inlet Water Pressure	25-60psi	200-400kg/cm <sup>2</sup>
Flow Pressure	15-25psi	200-400kg/cm <sup>2</sup>
Pump Power	0.54 HP	400W

All specifications are dependent on water pressure and temperature

### 3RD PARTY APPROVALS



### BLAKESLEE WARRANTY (USA / CANADA)


Blakeslee dishwashers are warranted for one year from date of installation against defective materials and workmanship.

Contact Blakeslee USA for details at [service@blakesleeinc.com](mailto:service@blakesleeinc.com) or 630.532.5021

This under counter dishwasher is ideal for bars, pubs, restaurants and hotels. Silent, reliable and easy to use at a reasonable price.

### FEATURES AND CONSTRUCTION

- 30 racks per hour / 2 minute cycle
  - 20 racks per hour / 3 minute cycle
  - Built-in rinse-aid pump
  - 85°C sanitizing rinse every cycle
  - Built-in 2800 watt booster heater
  - 1850 watt wash tank heater
  - Low 2.3L (0.6 gal) water usage per rack
  - Removable wash and rinse arms (upper and lower)
  - Top mounted controls easy to read and simple to operate
  - Double skin stainless steel door with security micro-switch
  - Heavy duty stainless steel construction. Internal cavity is 304 series stainless steel
  - Noise – 63 dB(A)
  - Optional drain pump – 25W hMAX 31 1/2”  
(10.56 gal (US)/min\*\*\*)
- \*\*\*Maximum Flow Rate

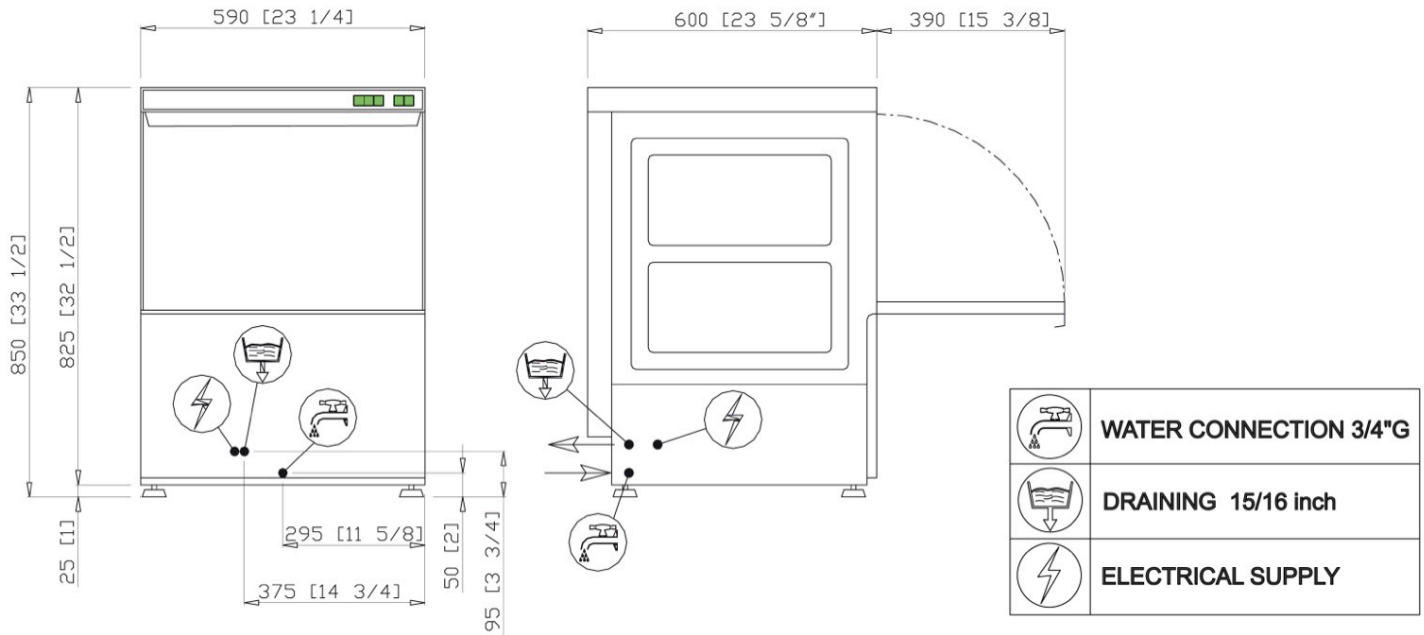

MODEL	DIMENSIONS	RACK SIZE	RACKS PER HOUR	ELECTRICAL	KW POWER	WEIGHT
UC-1000-1	23.25" x 23.625" x 33.5" (590 x 600 x 850 mm)	20" X 20" (500 X 500mm)	30 / 20	220-240V/50Hz/1Ph	13.3 - 14.5A 3200 Watts	124 lbs (56.2 kg)

All specifications are dependent on water pressure and temperature