



Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

UNDERCOUNTER DISHWASHER

MODEL: UC-2000-1



UC-2000-1

RACK SIZES:

| | | |
|-----------------|---------------|---------------|
| Dish Rack | 20 in X 20 in | 508mm X 508mm |
| Dish Max Height | 12.5 in | 320mm |
| Plates Diameter | 13.625 in | 346mm |

WATER CONSUMPTION

| | | |
|----------|----------------|-------------|
| Per Rack | 0.60 gal/cycle | 2.27L/cycle |
|----------|----------------|-------------|

OPERATING CYCLES:

| | |
|---------|---------|
| Cycle 1 | 120 sec |
| Cycle 2 | 180 sec |

OPERATING CAPACITY

| | |
|--------------------|--------------------|
| Racks per hour | 30 / 20 |
| Wash Tank Capacity | 7.6 (gal) 29 (L) |
| Booster Capacity | 1.5 (gal) 5.68 (L) |

CYCLE TEMPERATURES

| | | |
|-------|-------|------|
| Wash | 155°F | 68°C |
| Rinse | 185°F | 85°C |

WATER REQUIREMENTS

| | | |
|----------------------|----------|---------------------------------|
| Inlet Temperature | 140°F | 60°C |
| Inlet Water Pressure | 25-60psi | 200-400kg/cm ² |
| Flow Pressure | 15-25psi | 200-400kg/cm ² |
| Pump Power | 0.87 HP | 650W (340L/min ^{***}) |

All specifications are dependent on water pressure and temperature

3RD PARTY APPROVALS



BLAKESLEE WARRANTY (USA / CANADA)

Blakeslee dishwashers are warrantied for one year from date of installation against defective materials and workmanship.


Contact Blakeslee USA for details at service@blakesleeinc.com or 630.532.5021

This under counter dishwasher is ideal for bars, pubs, restaurants and hotels. Features a wide loading capacity granting the highest performance at a reasonable price.

FEATURES AND CONSTRUCTION

- 30 racks per hour / 2 minute cycle
- 20 racks per hour / 3 minute cycle
- Built-in rinse-aid pump
- 85°C sanitizing rinse every cycle
- Built-in 4500 watt booster heater
- 2700 watt wash tank heater
- Low 2.3L (0.6 gal) water usage per rack
- Removable wash and rinse arms (upper and lower)
- Triple filtering system to capture soil and debris
- Top mounted controls easy to read and simple to operate
- Double skin stainless steel door with security micro-switch
- Heavy duty stainless steel construction. Internal cavity is 304 series stainless steel
- Noise – 63 dB(A)
- Optional drain pump – 25W hMAX draining 0.8m (40L/min^{***})

^{***}Maximum Flow Rate

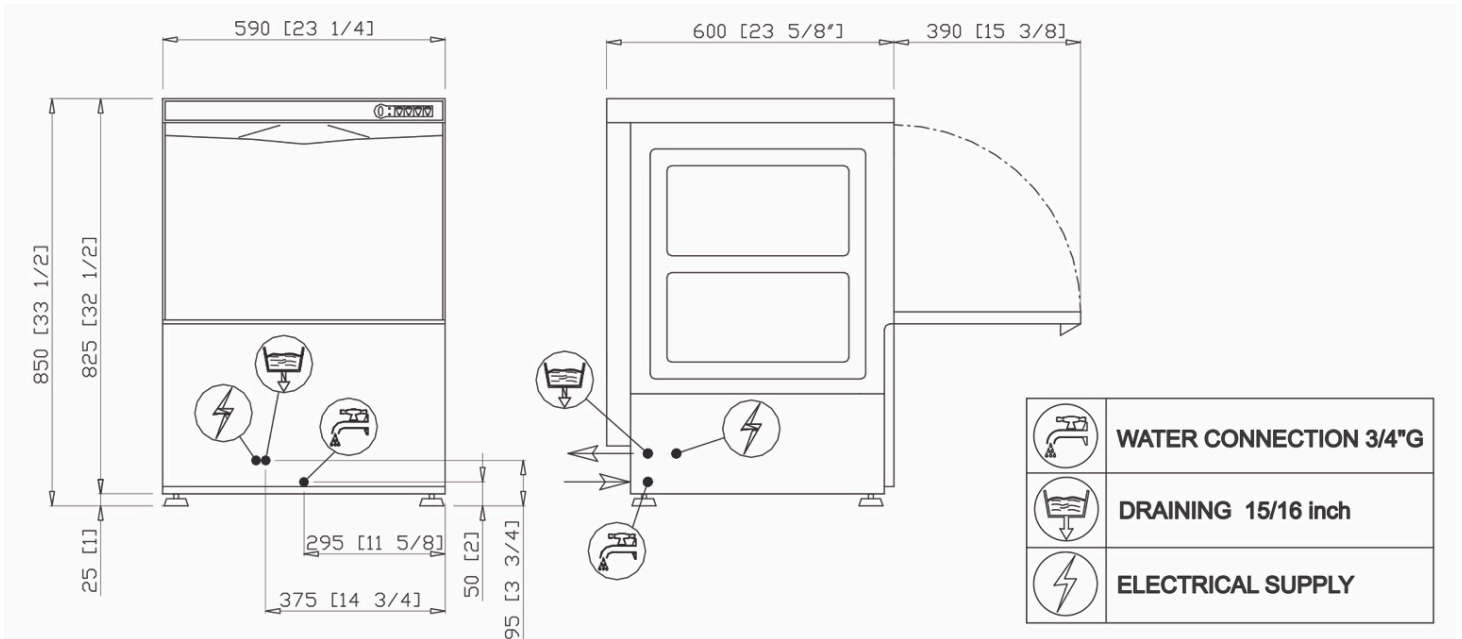

| MODEL | DIMENSIONS | RACK SIZE | RACKS PER HOUR | ELECTRICAL | KW POWER | WEIGHT |
|-----------|---|----------------------------|----------------|-------------------|----------------------------|-------------------|
| UC-2000-1 | 23.25" x 23.625" x 33.5" (590 x 600 x 850mm) | 20" X 20" (508 x 508mm) | 30 / 20 | 220-240V/60Hz/1Ph | 21.5 - 23.4A 5150 Watts | 124 lbs (56.2 kg) |

All specifications are dependent on water pressure and temperature