

Project Name:	
Location:	
Item #:	Qty:
Model:	

UNDERCOUNTER DISHWASHER

MODEL:

UC-900-1



UC-900-1

RACK SIZES:

 Dish Rack
 15.75 in X 15.75in
 400mm X 400mm

 Dish Max Height
 12 in
 305mm

 Plates Diameter
 11.625in
 295mm

WATER CONSUMPTION

Per Rack 0.47 gal/cycle 1.7L/cycle

OPERATING CYCLE:

Cycle 1 120 sec

OPERATING CAPACITY

Racks per hour 30

Wash Tank Capacity 3.83 (gal) 14.4 (L) Booster Capacity 0.9 (gal) 3.4 (L)

CYCLE TEMPERATURES

Wash 155°F 68°C Rinse 185°F 85°C

WATER REQUIREMENTS

Inlet Temperature 140°F 60°C

 Inlet Water Pressure
 25-60psi
 200-400kg/cm²

 Flow Pressure
 15-25psi
 200-400kg/cm²

 Pump Power
 0.55 HP
 400W (48.9 gal/min***)

All specifications are dependent on water pressure and temperature

This under counter dishwasher is ideal for bars, pubs, restaurants and hotels. Features a wide loading capacity granting the highest performance at a reasonable price.

FEATURES AND CONSTRUCTION

- 30 racks per hour / 2 minute cycle
- Built-in rinse-aid pump
- 85°C sanitizing rinse every cycle
- Built-in 2800 watt booster heater
- 1850 watt wash tank heater
- Low 1.8L (0.47 gal) water usage per rack
- Removable wash and rinse arms (upper and lower)
- Triple filtering system to capture soil and debris
- Top mounted controls easy to read and simple to operate
- Double skin stainless steel door with security micro-switch
- Heavy duty stainless steel construction. Internal cavity is 304 series stainless steel
- Noise 60.6 (CF) 61.2 (LS)
- Optional drain pump 25W hMAX 31 1/2"
 (10.56 gal (US)/min***)

***Maximum Flow Rate

3RD PARTY APPROVALS




BLAKESLEE WARRANTY (USA / CANADA)

Blakeslee dishwashers are warrantied for one year from date of installation against defective materials and workmanship.

Contact Blakeslee USA for details at service@blakesleeinc.com or 630.532.5021



UNDERCOUNTER DISHWASHER

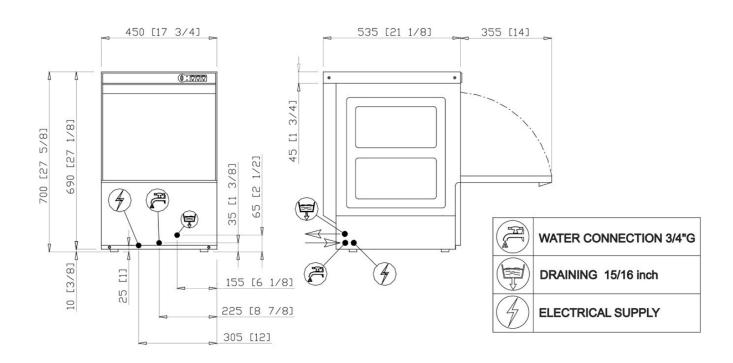

MODEL	DIMENSIONS	RACK SIZE	RACKS PER HOUR	ELECTRICAL	KW POWER	WEIGHT
UC-900-1	17.75" x 21.125" x 27.625" (450 x 535 x 700 mm)	15.75" X 15.75" (400 X 400mm)	30	220-240V/1Ph/50-60Hz	13.3 - 14.5A 3200 Watts	81 lbs (36.7 kg)

All specifications are dependent on water pressure and temperature