


SPRING BUMPER

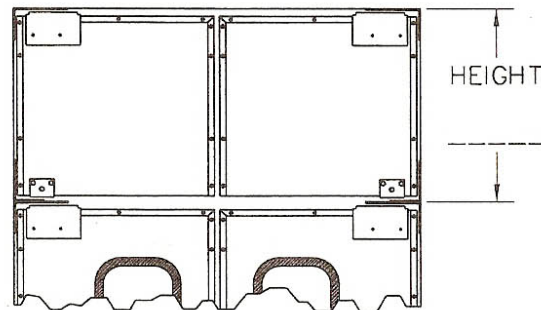

DOUBLE DUTCH

1. TOP HINGE ASSEMBLY
2. BOTTOM HINGE ASSEMBLY
3. HIGH PRESSURE LAMINATE CLAD
4. 9" WIDE x 14" HIGH CLEAR SAFETY ACRYLIC WINDOW
5. 18 ga. STEEL KICK PLATES (SEE OPTIONS)
6. 3/4" THICK EXTERIOR GRADE PLYWOOD CORE
7. GALVANIZED OR STAINLESS STEEL TRIM

*** RECOMMENDED FRAMING REQUIREMENTS:
 1/8" THICK x 4" WIDE FACE STEEL FRAME MOUNTED
 TO A SOLID FOUNDATION.

DOOR OPENING:
 _____W _____H

QUANTITY: _____

- DOUBLE
- SINGLE
 - LEFT
 - RIGHT

LAMINATE CLADDING

BRAND: _____

COLOR: _____

MFR'S #: _____

OPTIONS (CHECK BOX IF APPLICABLE)

- 5/16" THICK HDP SPRING BUMPERS
 SELECT HEIGHT
 - 12"
 - 21"
 - 42"

- CUSTOM WINDOW DESIGN
 - RECTANGULAR/SQUARE

_____W _____H

- ROUND - DIAMETER: _____

- 9" JAMB GUARDS

- KICK PLATES
 SELECT HEIGHT
 - 24"
 - 36"
 - 48"
 - FULL HEIGHT

METAL SELECTION (FRONT/BACK)

- STAINLESS STEEL/STAINLESS STEEL
- STAINLESS STEEL/GALV. STEEL
- GALV. STEEL/STAINLESS STEEL
- GALV. STEEL/GALV. STEEL

- CART GUARD

- CHAIN LOCKING COLLAR

- DOUBLE DUTCH

S.S. QUOTE REF. # _____

CUSTOMER _____

APPROVED BY: _____

P/O No.: _____

DATE: _____



SERIES 1000 - MODEL SS4
 GASKETED/NON-GASKETED WOOD CORE DOOR

DATE: REV. NOV-23-04	SCALE: N.T.S.
DRAWN: OC	DWG NO: LSS4
APPROVED: AX	PART NO: N/A