


DOOR OPENING:
 _____ W x _____ H
 DOUBLE SINGLE
QUANTITY: _____

MODEL
 C25 C25LT
FABRIC COLOR: _____

OPTIONS
 (CHECK BOX IF APPLICABLE)
 - HOLD OPEN DEVICE
 - 270° HINGE
 - TOP PLATE
 - EXTENSION "U" BRACKETS

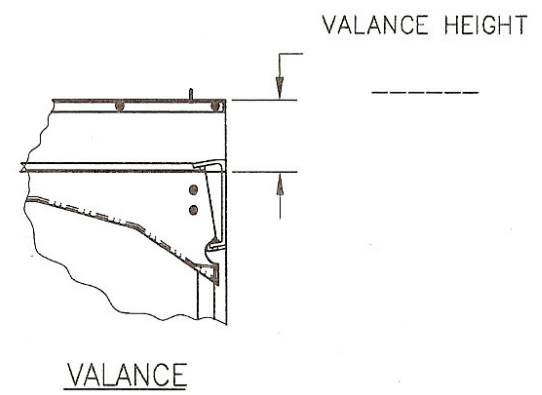

- 1 - GRAVITY SWING-ARM TOP HINGE ASSEMBLY
- 2 - SINGLE-PLY 40 oz. REINFORCED VINYL
- 3 - 1/4" THICK STANDARD CLEAR PVC DOOR BODY (C25)
OR 1/4" THICK LOW-TEMP (C25LT)
- 4 - 1/8" THICK x 48" HIGH BLACK SUPERLON (C25)
- MODEL C25LT RECOMMENDED FOR COOLER APPLICATIONS

*** RECOMMENDED FRAMING REQUIREMENTS:
 1/8" THICK x 4" WIDE FACE STEEL FRAME MOUNTED
 TO A SOLID FOUNDATION.

S.S. QUOTE REF. # _____
 CUSTOMER _____
 APPROVED BY: _____
 P/O No.: _____
 DATE: _____



SERIES 2000 - MODELS C25 & C25LT
 CLEAR VIEW FLEXIBLE PVC IMPACT DOORS

DATE: NOV-23-04	SCALE: 1:24
DRAWN: GK,OC	DWG NO: L2000-E