

AUTOMATIC FILLING UNIT

IT IS INSTALLED TO MAINTAIN THE HEATING SYSTEM PRESSURE STABLE AT A SET VALUE, AUTOMATICALLY TOPPING UP WITH WATER, AS REQUIRED

146 Automatic filling unit

**NEW
2020**



SIZE	PRESSURE	CODE	PACKING
1/2" (DN 15)	16bar/232psi	1460012	1/18
1/2" (DN 15)	16bar/232psi	1460012SM	1/18

Mention "1460012SM" in the code only to receive item without pressure gauge.


AUTOMATIC FILLING UNIT:

Equipped with shut-off valve, stainless steel filter and check valve.
Piston operation.
Brass body.
Minimum and maximum working temperature: 0°C, 80°C.
Maximum inlet pressure: 16 bar.
Outlet pressure can be adjusted between 0,5 and 4 bar.
Factory preset: 1,5 bar.
Pressure gauge connection: 1/4".
Threads: ISO 228 (equivalent to DIN EN ISO 228 and BS EN ISO 228).

AUTOMATIC FILLING UNIT WITH PRESSURE GAUGE:


Equipped with shut-off valve, stainless steel filter and check valve.
Piston operation.
Brass body.
Minimum and maximum working temperature: 0°C, 80°C.
Maximum inlet pressure: 16 bar.
Outlet pressure can be adjusted between 0,5 and 4 bar.
Factory preset: 1,5 bar.
Pressure gauge: scale (0-6) bar ; threaded connection 1/4".
Threads: ISO 228 (equivalent to DIN EN ISO 228 and BS EN ISO 228).



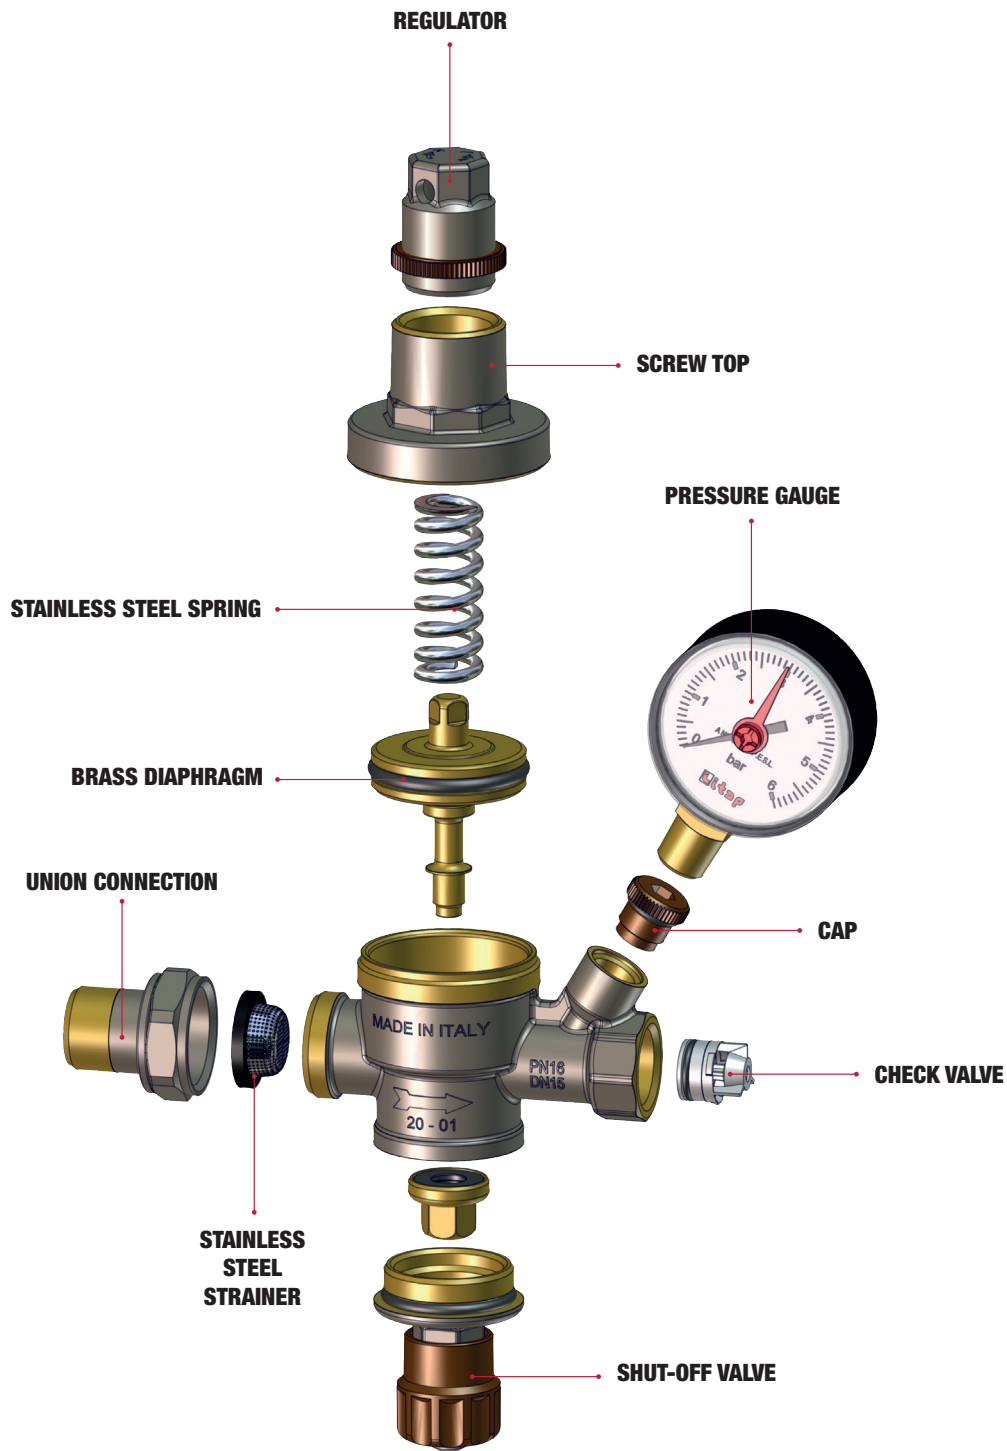

COMPLETE WITH:

- SHUT-OFF VALVE
- STAINLESS STEEL STRAINER
- CHECK VALVE

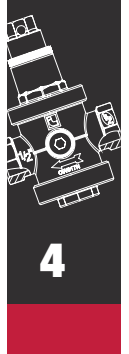

4