

ULTIMATE DURABILITY INSIDE AND OUT.

EXTERNAL PROTECTION.

Impact-proof – Robust Feed's double-walled design with special impact zones is perfect for enduring daily use in tough conditions. Drop it, drag it, throw it around – Robust Feed can take it.

Weather-proof – Extreme elements are no problem for Robust Feed. It works in freezing cold temperatures, and it's the only portable wire feeder with an IP44 rating for superior protection against dirt, mud, splashes, and even heavy rain.

Sun-proof – Robust Feed will keep working in temperatures up to 130°F (55°C), and its bright front display is readable in even the sunniest conditions.



INTERNAL PROTECTION.

Shielded connections – Superior protection for the interconnection cable and all connectors inside the housing helps prevent broken cables when moving around and creates the best strain-relief solution on the market.

Shielded spools – Robust Feed protects the filler metal inside the unit like no other feeder, and the offshore version includes a heat kit to always keep the spool dry.

Shielded electronics – A dust-protected compartment protects the internal components even while the feeder is open, and special cable connections protect the feeder against short circuits in both the torch and the interconnection cables.



RUGGED AND READY FOR ANYTHING.

UNRIVALED PORTABILITY.

Robust Feed has three comfortable handles (all are crane certified) and two additional lifting points for best-in-class portability and maneuverability, making it easy to lift and carry through confined spaces and around obstacles. Rounded edges and special high-durability wear surfaces let you drag it anywhere without catching on other objects. The optional flat and vertical wheel kits and trolley integration allow for even greater mobility. And the new design can handle power source cables up to 300 feet long, so you'll always get to where you need to weld – in the shop or the field.



UNMATCHED PERFORMANCE.

The new precisely crafted aluminum drive stand feeds solid wire up to 5/64 in. and cored up to 3/32 in. at speeds of 30–985 in./min. When changing the spool, you can feed the new wire without opening the drive stand. And when it comes to power, Robust Feed easily handles 550 A at 50% duty cycle, 500 A at 60% duty cycle, and 400 A at 100%, enabling productivity that few other portable feeders can provide.





UNBEATABLE USABILITY.

Streamlined display – Robust Feed's clear and bright front panel display contains only the most important settings, keeping the other settings well protected inside the housing.


Easy-to-use controls – Large, distinct knobs and push buttons make it easy to operate the unit – even while wearing thick welding gloves.

Integrated gas flow – Robust Feed comes with an integrated gas flow meter inside the unit (offshore version), allowing for quick gas flow adjustments.

Onboard settings – Seamlessly control all weld settings right from the wire feeder, no matter where your power source is located.

Maintenance-friendly – Robust Feed's design allows for quick access to the electronics and motor for easy service and repair, and the tool-less wire feeding system makes spool changeouts quick and wire setup simple.

Flexible performance – Works in both vertical and horizontal alignment with the ability to rotate the display 90 degrees to adjust your viewing angle. The horizontal wheel kit gives the feeder a low, stable profile.

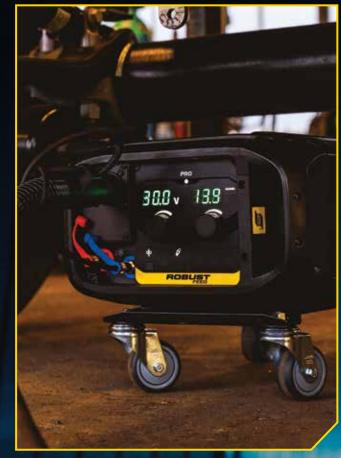







SPECIFICATIONS	
Input Voltage	42 VAC
Welding Output	550 A @ 50% 500 A @ 60% 400 A @ 100%
Wire Dimensions Mild Steel Stainless Steel Cored Wire Aluminum	.023–5/64 in. (0.6–2.0 mm) .023–1/6 in. (0.6–1.6 mm) .040–3/32 in. (0.9–2.4 mm) .040–1/6 in. (0.9–1.6 mm)
Wire Feed Speed	30-985 in./min. (0.8-25.0 m/min.)
Wire Spool Capacity	44 lb. (20 kg)
Max Spool Diameter	12 in. (300 mm)
Operating Temperatures	-68°F to +131°F (-20°C to +55°C)
Certification Mark (standards)	CE, CSA
Dimensions (L x W x H)	23.5 in. x 9.8 in. x 16.9 in. (595 mm x 250 mm x 430 mm)
Weight	37.1 lb. (16.8 kg)

FEEDERS AND POWER SOURCES	
Wire Feeder Versions	Compatible Power Sources
Robust Feed Pro	
Robust Feed Pro Offshore (including gas flow meter and heater)	Warrior 500i, Warrior 400i, Warrior 400i MV

OPTIONS AND ACCESSORIES		
General Accessories	Torch strain relief	
	Wheel kit – works with vertical and horizontal feeder alignment	
	Interconnection cables	
	Trolley with swivel post for feeder	
Connection Kits	Water connection kit	
	MIG gun connection kit – Tweco® #4 (comes with feeder)	
	MIG gun connection kit – Tweco #5	
	MIG gun connection kit – Euroconnector	
	Quick Connector Marathon Pac [™]	
MIG Guns	Spray Master [™] 350 A 15 ft. (4.5 m) gas-cooled MIG gun	
	Spray Master 350 A 25 ft. (7.6 m) gas-cooled MIG gun	
	Spray Master 450 A 15 ft. (4.5 m) gas-cooled MIG gun	
	Spray Master 450 A 25 ft. (7.6 m) gas-cooled MIG gun	
	Classic® No. 5 15 ft. (4.5 m) gas-cooled MIG gun	

Get the feeder that keeps on feeding. Contact your ESAB distributor to order a Robust Feed package today, and visit esab.com/robust to learn more.

UNRIVALED SERVICE AND SUPPORT.

Robust Feed, like every ESAB machine, is backed by our commitment to superior customer service and support. Our skilled customer service department is prepared to quickly answer any questions, address problems, and help with maintenance and upgrading of machines.

For more information on Robust Feed, visit esab.com/robust.

3-YEAR WARRANTY.

ESAB's industry-leading service and support means that if customers do need help, they'll be protected by the most comprehensive warranty in the business.



100% SATISFACTION GUARANTEE.

If there's anything you're not completely satisfied with in your first 100 days with your new Robust Feed, ESAB will make it right, even if it means giving you your money back.

It's all part of our Iron Clad Pledge to our customers.





ESAB / esab.com











