

SL100 SV Mechanized Torch



The patented SL100 SV torch cuts up to 32 mm (1-1/4 in.) material using air as the plasma and shielding gas. Utilizing a blowback start, and an electronically controlled pilot arc, the SL100 SV sets a new standard for starting reliability, cutting characteristics, and consumable life.

- 100% duty cycle at 100A and 80% duty cycle at 120A for enhanced productivity allowing for continuous operation even at maximum thickness
- Blowback starting mechanism to initiate the cut, which eliminates high frequency interference from the starting circuits
- Torch lead length up to 30.5 m (100 ft.) available
- Machined torch body, 35 mm (1-3/8 in.) diameter, available with and without 32-pitch rack to fit industry standard torch holders
- Robust machined torch components provide for reliability, durability and ease of maintenance

Visit esab.com for more information.

Torch Specifications	
Recommended maximum production cutting	15 mm (5/8 in.)
Severs	32 mm (1-1/4 in.) max
Maximum piercing thickness	20 mm (3/4 in.)
Current capacity, DC	120 A @ 80% duty cycle 100 A @ 100% duty cycle
Nominal flow rate, with 120 A consumables	189 l/min @ 5.5 bar (402 cfm @ 80 psig)
Available lead lengths	7.6 m (25 ft.) 10.6 m (35 ft.) 15.2 m (50 ft.) 23 m (75 ft.) 30.5 m (100 ft.)
Length	403 mm (15.875 in.)
Power sources	ESAB A40, A60, A80, A120

SL100 SV Mechanized Torch

Cutting Specifications						
Material Thickness	Arc Voltage	Torch Working Height	Travel Speed	Initial Piercing Height	Pierce Delay	Kerf Width @ Rec. Speed
40 A						
4.8 bar (70 psi), 7.6 m (25 ft.)						
5.2 bar (75 psi), 15.2 m (50 ft.)						
0.95 mm (20 ga)	101 V	3.5 mm (0.14 in.)	4064 mm/min (160 ipm)	4.5 mm (0.18 in.)	0 s	1.3 mm (0.05 in.)
1.59 mm (16 ga)	103 V	3.5 mm (0.14 in.)	3556 mm/min (140 ipm)	4.5 mm (0.18 in.)	0 s	1.3 mm (0.05 in.)
1.98 mm (14 ga)	105 V	3.5 mm (0.14 in.)	3048 mm/min (120 ipm)	4.5 mm (0.18 in.)	0.1 s	1.5 mm (0.06 in.)
2.78 mm (12 ga)	108 V	3.5 mm (0.14 in.)	2032 mm/min (80 ipm)	4.5 mm (0.18 in.)	0.2 s	1.5 mm (0.06 in.)
3.57 mm (10 ga)	110 V	3.5 mm (0.14 in.)	1524 mm/min (60 ipm)	4.5 mm (0.18 in.)	0.3 s	1.5 mm (0.06 in.)
5 mm (3/16 in.)	111 V	3.5 mm (0.14 in.)	1397 mm/min (55 ipm)	4.5 mm (0.18 in.)	0.4 s	1.5 mm (0.06 in.)
6 mm (1/4 in.)	117 V	3.5 mm (0.14 in.)	1016 mm/min (40 ipm)	4.5 mm (0.18 in.)	0.5 s	1.8 mm (0.07 in.)
10 mm (3/8 in.)	119 V	3.5 mm (0.14 in.)	635 mm/min (25 ipm)	4.5 mm (0.18 in.)	1.2 s	1.8 mm (0.07 in.)
60 A						
5.8 bar (85 psi), 7.6 m (25 ft.)						
6.2 bar (90 psi), 15.2 m (50 ft.)						
1.59 mm (16 ga)	118 V	4.8 mm (0.19 in.)	7366 mm/min (290 ipm)	4.8 mm (0.19 in.)	0 s	2.0 mm (0.08 in.)
1.98 mm (14 ga)	120 V	4.8 mm (0.19 in.)	7239 mm/min (285 ipm)	4.8 mm (0.19 in.)	0.10 s	2.0 mm (0.08 in.)
3.18 mm (11 ga)	118 V	4.8 mm (0.19 in.)	4572 mm/min (180 ipm)	4.8 mm (0.19 in.)	0.10 s	2.0 mm (0.08 in.)
3.57 mm (10 ga)	119 V	4.8 mm (0.19 in.)	4470 mm/min (176 ipm)	4.8 mm (0.19 in.)	0.10 s	2.0 mm (0.08 in.)
5 mm (3/16 in.)	121 V	4.8 mm (0.19 in.)	2540 mm/min (100 ipm)	4.8 mm (0.19 in.)	0.20 s	2.0 mm (0.08 in.)
6 mm (1/4 in.)	122 V	4.8 mm (0.19 in.)	2032 mm/min (80 ipm)	4.8 mm (0.19 in.)	0.30 s	2.0 mm (0.08 in.)
10 mm (3/8 in.)	124 V	4.8 mm (0.19 in.)	1270 mm/min (50 ipm)	4.8 mm (0.19 in.)	0.50 s	2.3 mm (0.09 in.)
12 mm (1/2 in.)	132 V	4.8 mm (0.19 in.)	660 mm/min (26 ipm)	4.8 mm (0.19 in.)	0.75 s	2.5 mm (0.10 in.)
15 mm (5/8 in.)	135 V	4.8 mm (0.19 in.)	483 mm/min (19 ipm)	Edge Start		2.5 mm (0.10 in.)
80 A						
5.8 bar (85 psi), 7.6 m (25 ft.)						
6.2 bar (90 psi), 15.2 m (50 ft.)						
1.59 mm (16 ga)	110 V	4.8 mm (0.19 in.)	8128 mm/min (320 ipm)	5.1 mm (0.20 in.)	0 s	1.5 mm (0.06 in.)
3.18 mm (11 ga)	113 V	4.8 mm (0.19 in.)	5842 mm/min (230 ipm)	5.1 mm (0.20 in.)	0.10 s	1.8 mm (0.07 in.)
3.57 mm (10 ga)	110 V	4.8 mm (0.19 in.)	4572 mm/min (180 ipm)	5.1 mm (0.20 in.)	0.20 s	1.8 mm (0.07 in.)
5 mm (3/16 in.)	110 V	4.8 mm (0.19 in.)	3454 mm/min (136 ipm)	5.1 mm (0.20 in.)	0.30 s	1.8 mm (0.07 in.)
6 mm (1/4 in.)	115 V	4.8 mm (0.19 in.)	2540 mm/min (100 ipm)	5.1 mm (0.20 in.)	0.40 s	2.3 mm (0.09 in.)
10 mm (3/8 in.)	125 V	4.8 mm (0.19 in.)	1067 mm/min (42 ipm)	5.1 mm (0.20 in.)	0.50 s	2.3 mm (0.09 in.)
12 mm (1/2 in.)	123 V	4.8 mm (0.19 in.)	1016 mm/min (40 ipm)	5.1 mm (0.20 in.)	0.60 s	2.3 mm (0.09 in.)
15 mm (5/8 in.)	133 V	4.8 mm (0.19 in.)	457 mm/min (18 ipm)	5.1 mm (0.20 in.)	0.75 s	2.5 mm (0.10 in.)
20 mm (3/4 in.)	140 V	6.4 mm (0.25 in.)	457 mm/min (18 ipm)	Edge Start		2.8 mm (0.11 in.)

SL100 SV Mechanized Torch

Cutting Specifications

Material Thickness	Arc Voltage	Torch Working Height	Travel Speed	Initial Piercing Height	Pierce Delay	Kerf Width @ Rec. Speed
100 A						
5.2 bar (75 psi), 7.6 m (25 ft.)						
5.2 bar (75 psi), 15.2 m (50 ft.)						
6 mm (1/4 in.)	110 V	4.6 mm (0.18 in.)	2159 mm/min (85 ipm)	5.1 mm (0.20 in.)	0.10 s	2.3 mm (0.09 in.)
10 mm (3/8 in.)	112 V	4.6 mm (0.18 in.)	1905 mm/min (75 ipm)	5.1 mm (0.20 in.)	0.20 s	2.3 mm (0.09 in.)
12 mm (1/2 in.)	115 V	4.6 mm (0.18 in.)	1143 mm/min (45 ipm)	5.1 mm (0.20 in.)	0.40 s	2.5 mm (0.10 in.)
15 mm (5/8 in.)	118 V	4.6 mm (0.18 in.)	762 mm/min (30 ipm)	5.1 mm (0.20 in.)	0.60 s	2.8 mm (0.11 in.)
20 mm (3/4 in.)	120 V	4.6 mm (0.18 in.)	508 mm/min (20 ipm)	5.1 mm (0.20 in.)	1.20 s	3.0 mm (0.12 in.)
25 mm (1 in.)	123 V	4.6 mm (0.18 in.)	381 mm/min (15 ipm)	Edge Start		3.0 mm (0.12 in.)
120 A						
5.5 bar (80 psi), 7.6 m (25 ft.)						
5.5 bar (80 psi), 15.2 m (50 ft.)						
6 mm (1/4 in.)	134 V	4.8 mm (0.19 in.)	3810 mm/min (150 ipm)	6.4 mm (0.25 in.)	0.10 s	2.8 mm (0.11 in.)
10 mm (3/8 in.)	141 V	4.8 mm (0.19 in.)	2159 mm/min (85 ipm)	6.4 mm (0.25 in.)	0.30 s	2.8 mm (0.11 in.)
12 mm (1/2 in.)	141 V	4.8 mm (0.19 in.)	1778 mm/min (70 ipm)	6.4 mm (0.25 in.)	0.80 s	3.0 mm (0.12 in.)
15 mm (5/8 in.)	146 V	4.8 mm (0.19 in.)	1143 mm/min (45 ipm)	6.4 mm (0.25 in.)	1.00 s	3.0 mm (0.12 in.)
20 mm (3/4 in.)	150 V	4.8 mm (0.19 in.)	762 mm/min (30 ipm)	6.4 mm (0.25 in.)	1.20 s	3.0 mm (0.12 in.)
22 mm (7/8 in.)	160 V	6.4 mm (0.25 in.)	635 mm/min (25 ipm)	Edge Start		3.5 mm (0.14 in.)
25 mm (1 in.)	163 V	6.4 mm (0.25 in.)	482 mm/min (19 ipm)	Edge Start		3.5 mm (0.14 in.)
31.75 mm (1-1/4 in.)	168 V	6.4 mm (0.25 in.)	305 mm/min (12 ipm)	Edge Start		3.8 mm (0.15 in.)


Ordering Information

Description	Part Number
SL100 SV with ATC, 180° Automation, 7.6 m (25 ft.)	7-4001
SL100 SV with ATC, 180° Automation, 10.6 m (35 ft.)	7-4002
SL100 SV with ATC, 180° Automation, 15.2 m (50 ft.)	7-4003
SL100 SV with ATC, 180° Automation, 23 m (75.5 ft.)	7-4004
SL100 SV with ATC, 180° Automation, 30.5 m (100 ft.)	7-4005

Options & Accessories

Description	Part Number
Hand pendant extension, 7.6 m (25 ft.)	7-7744
Spare parts kit 120 A	5-0175
Spare parts kit 80 A	5-0123
Spare parts kit 60 A	5-0122
Spare parts kit 40 A	5-0079

SL100 SV Mechanized Torch

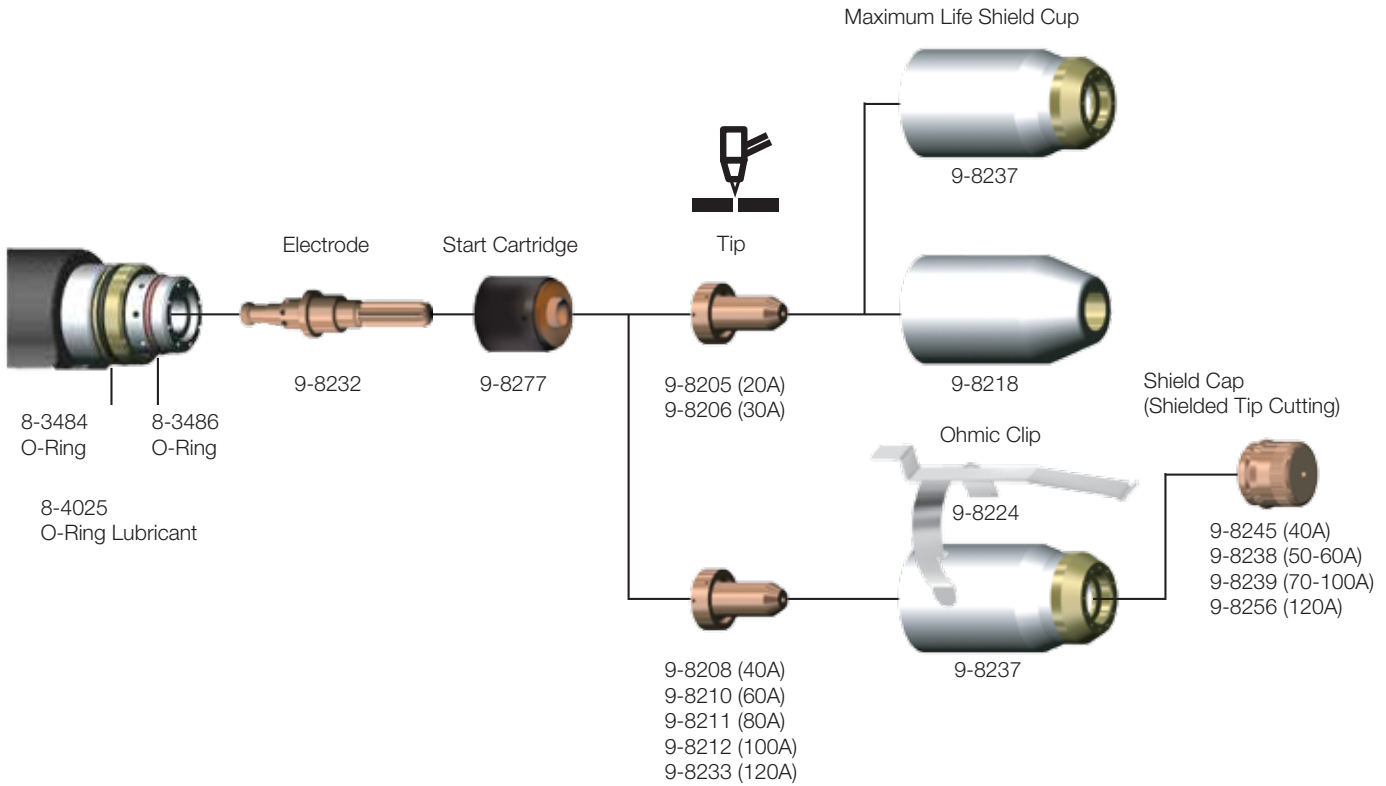

ESAB / esab.com



COMPANY WITH
MANAGEMENT SYSTEM
CERTIFIED BY DNV
= ISO 9001 =
= ISO 14001 =
= OHSAS 18001 =