

11 WINDOW SIZES

4 inner frame ring sizes for each window size

Arctic Tern windows come complete with the blind and screen assembly.

STRUTS HOLD OPEN

Telescopic strut supports hold windows securely open. 300 mm size can be set at 10 & 35 degrees open. All other sizes can be held open at 20, 40 & 60 degrees.

UV RESISTANT

Genuine G.E. Lucite Perspex. Less than 2% clarity loss over 10 years in full sun.

IMPACT RESISTANT

17 times more resistant to impact than glass. Does not shatter! Double pane means only one is likely to break, not leaving a hole in your rig.

DOT CERTIFIED

and meets ECE standards.




ALUMINUM FRAME

Heavy duty powder coated frame is built to last and prevent corrosion.

DOUBLE PANE ACRYLIC

(light gray, cannot tint) 5.25 times more thermally efficient than glass. Lighter than glass: glass is 2.14 times heavier than acrylic.

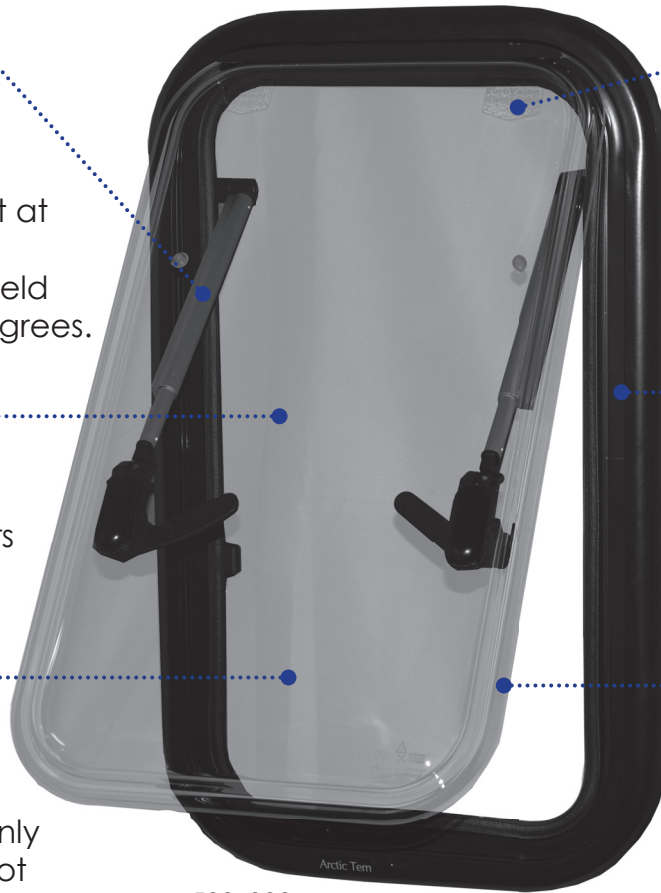

500x300

PUSH BUTTON LOCKING HANDLES

can also be set to a semi-lock position that allows air in during stormy conditions. It is safe to drive with windows open in the semi lock mode only. Do not drive with windows fully open.

RUBBER SEAL

Easy to install, no glue or adhesive.



300x500

• **FULL PARTS DEPARTMENT** •
1 Year Manufacturer's Warranty

BLIND & SCREEN ASSEMBLY

included with every Arctic Tern window

EXTRUDED ALUMINUM ROLLERS

shade and screen will never sag!

ADDED INSULATION

The blind also creates a second dead air space for maximum thermal efficiency in very cold conditions.

BLIND SYSTEM

can be activated individually or locked together for infinite combinations of privacy and fresh air.

SCREEN HOUSING

A separate interior cover panel contains the retractable fine mesh insect screen.

BLIND HOUSING

A separate interior cover panel contains the retractable blackout shade.

BLACKOUT SHADE


offers privacy and blocks light with the reflective exterior.

ALUMINUM FRAME

Heavy duty powder coated frame is built to last and prevent corrosion.

INSECT SCREEN

made from a fine mesh that helps keep bugs out and lets fresh air in.

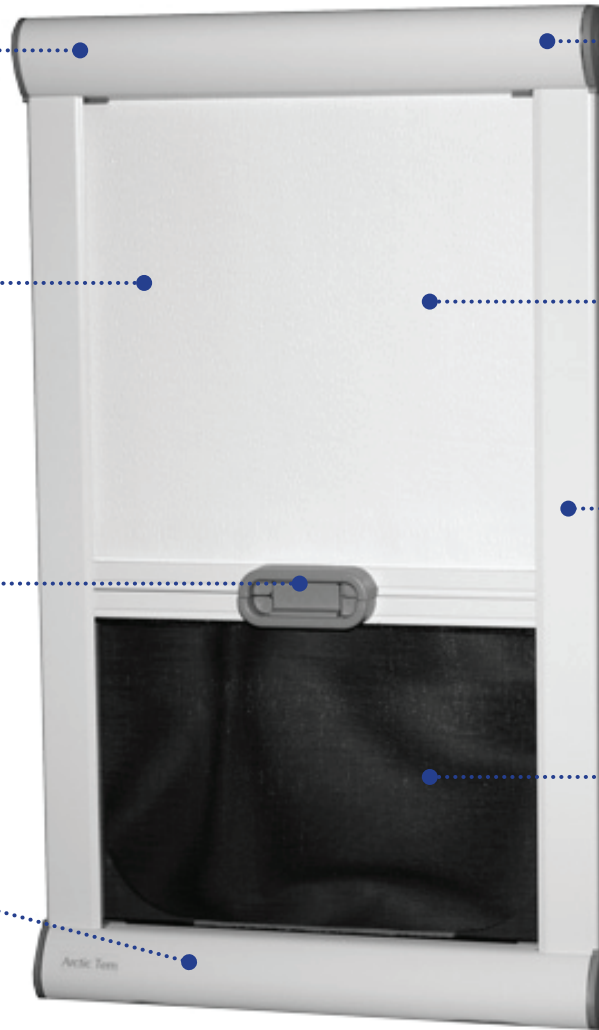

Blind & Screen Assembly
for 500x300 window



Blind & Screen Assembly for 300x1100 window

- **FULL PARTS DEPARTMENT** •
- 1 Year Manufacturer's Warranty

INNER FRAME RING

included with each window • 4 sizes to choose from

The thickness required to install the window is at minimum 15/16", so a spacer will be required for installation in vans. Wall thickness varies depending on the build.

The wall thickness will be the entire span from the edge of the outer wall to the edge of the inner wall including any insulation and finished surface.

The traditional installation method takes into account the entire wall thickness; sheet metal + insulation + finished surface. The spacer ring (can be just 4 straight pieces of wood or aluminum) will be mounted directly to the sheet metal and would be within the thickness chosen. The blind and screen will install on the inside of the finished wall.

Traditional installation would have the exterior window frame and inner frame ring sandwich the exterior wall, insulation and interior finished wall.

FOUR WALL THICKNESSES ARE AVAILABLE FOR ALL WINDOWS:



24-34mm

size range in inches:
15/16" - 1 3/8"
included in price

35-44mm

size range in inches:
1 3/8" - 1 3/4"
included in price

45-54mm

size range in inches:
1 3/4" - 2 1/8"
included in price

64-74mm

size range in inches:
2 1/2" - 2 9/10"
\$69 extra

• **FULL PARTS DEPARTMENT** •
1 Year Manufacturer's Warranty