PRE-HANGING SPEC SHEET

ORDER #: _____ **NAME:** _____ **SIGNATURE:** _____

JOB #	MODEL	WIDTH	HEIGHT	RO (Rough Opening)	JAMB WIDTH	BORE	KERF	HINGE COLOR	HANDING	INT / EXT	SPECIAL INSTRUCTIONS

PRE-HANGING FOR SINGLE DOORS

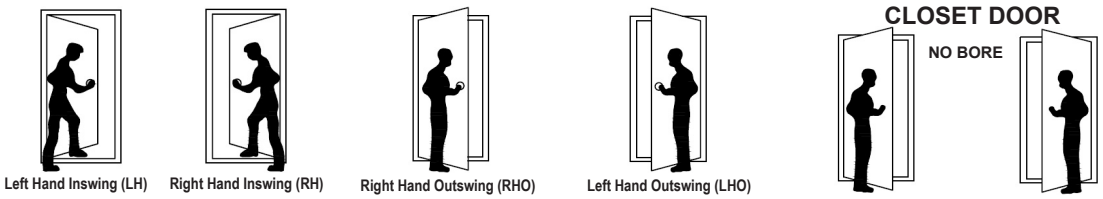

PRE-HANGING FOR DOUBLE DOORS

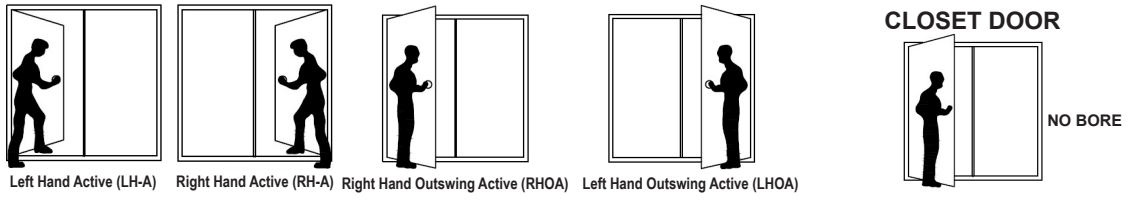

JAMB WIDTH

- ☐ 4-9/16”
- ☐ 4-3/4”
- ☐ 5-1/4”
- ☐ 6-5/8” *(Add $40 to Price)*
- ☐ 7-1/4” *(Add $50 to Price)*

Custom Size: _____
(Addtional Cost)

JAMB WOOD SPECIES

- ☐ Mahogany
- ☐ Knotty Alder
- ☐ Paint Grade
- ☐ Douglas Fir
- ☐ Walnut
- ☐ White Oak

BORE

- ☐ Single
- ☐ Double
- ☐ No Bore
- ☐ Mortise Prep *(Add $175 to Price)*

- Deadbolt Prep - not performed on jambs due to variance of deadbolt sizes.
- Double Bore Prep is only performed on the active door.
- Standard Cylinder Bore: 2-1/8”
- Backset: 2-3/8”

KERF FOR DRY WALL

- ☐ Both sides *(Add $24 to Price)*
- ☐ Inside Only *(Add $15 to Price)*

HINGE COLOR

- ☐ Bronze (US10B)
- ☐ Satin Nickel (US15)
- ☐ Black (US1)
- ☐ Brass (US3) - *For interior doors only*

THRESHOLD*

- ☐ Bronze (US10B)
- ☐ Satin Nickel (US15)
- ☐ Ada Sill (Bronze only)
- ☐ Oak

DOOR SHOE*

- ☐ Bronze (US10B)
- ☐ Satin Nickel (US15)

Door Shoe and Threshold are being used only for exterior doors.