


# PRODUCT INFORMATION PACKET



Model No: 7DB6503

Catalog No: 7DB6503

1/8-1/10-1/12 HP Fan Coil / Room Air Conditioner Motor, 1075 RPM, 3 Speed, 277 Volts, 42 Frame, OAO  
Fan Coil / Room Air Conditioner Motors

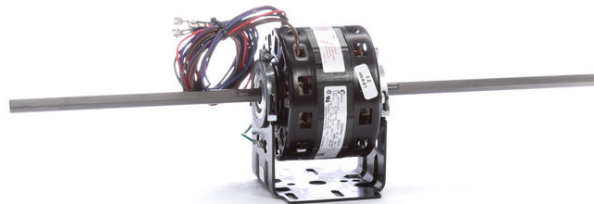

Regal and Century are trademarks of Regal Beloit Corporation or one of its affiliated companies.  
©2020 Regal Beloit Corporation, All Rights Reserved. MC017097E

The REGAL logo is a grey rectangular box with the word 'REGAL' in white, slanted capital letters. It is positioned on a blue and black halftone background that runs vertically down the right side of the page.

REGAL



**Nameplate Specifications**

Output HP	1/8,1/10,1/12 Hp	Output KW	0.10 kW
Frequency	60 Hz	Voltage	277 V
Current	0.8, 0.7, 0.5 A	Speed	1075 rpm
Service Factor	1	Phase	1
Duty	Air Over	Insulation Class	A
Frame	42Y	Enclosure	Open Air Over
Thermal Protection	Automatic	Ambient Temperature	40 °C
UL	Recognized	CSA	Y
CE	N		

**Technical Specifications**

Electrical Type	Permanent Split Capacitor	Starting Method	Across The Line
Poles	6	Rotation	Counterclockwise Lead End
Mounting	Resilient Base	Motor Orientation	Horizontal
Drive End Bearing	Sleeve	Opp Drive End Bearing	Sleeve
Frame Material	N/A	Shaft Type	Flat
Overall Length	22.00 in	Shaft Diameter	0.500 in
Shaft Extension	9.3 X.5 X9.3 in		
Connection Drawing	7552A86F01	Outline Drawing	11927-017

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:19/10/2020

4	3	2	1																																						
<b>GENERAL INFORMATION:</b>  SHAFT RUNOUT: .001[.03] T.I.R. PER INCH LENGTH OF EXTENSION.  END PLAY: .010[.25] TO .063[1.60]  BEARINGS: SLEEVE  MOUNTING POSITION: HORIZONTAL   <b>ELECTRICAL DATA:</b>  OVERLOAD PROTECTOR: AUTOMATIC RESET (T.I. 7AM 134)  LEADS: NO. 18 GA., .03[.8] THK., 125°C INSUL.  GROUND LEAD: NO. 18 GA., .03[.8] THK., GREEN INSUL.		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>REV</th> <th>ECO</th> <th>REV BY</th> <th>DATE</th> <th>APPD</th> <th>DATE</th> </tr> <tr> <td>B</td> <td>0007689</td> <td>PEDRO AVILEZ</td> <td>07-27-2009</td> <td>JOSUE ORTEGA</td> <td>07-27-2009</td> </tr> </table>		REV	ECO	REV BY	DATE	APPD	DATE	B	0007689	PEDRO AVILEZ	07-27-2009	JOSUE ORTEGA	07-27-2009																										
REV	ECO	REV BY	DATE	APPD	DATE																																				
B	0007689	PEDRO AVILEZ	07-27-2009	JOSUE ORTEGA	07-27-2009																																				
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>NAMEPLATE DATA:</th> <th>EXTERNAL CONNECTION DIAGRAM</th> </tr> <tr> <td>                     MODEL NO.: 322P241                      CUST. P/N: 7DB6503                      HP: 1/8, 1/10, 1/12                      ROT.: CCWLE                      RPM: 1075                      TYPE: FLL                      FRAME: 42Y                      VOLTS: 277                      PH: 1                      AMPS: 0.8, 0.7, 0.5                      HZ: 60                      INS.: A                      AMB.: 40° C                      DUTY: AIR OVER                      CAP.: 5 MFD/370 V                      UL LOGO                      CSA LOGO                      THERMALLY PROTECTED TYPE C                 </td> <td> </td> </tr> </table>		NAMEPLATE DATA:	EXTERNAL CONNECTION DIAGRAM	MODEL NO.: 322P241 CUST. P/N: 7DB6503 HP: 1/8, 1/10, 1/12 ROT.: CCWLE RPM: 1075 TYPE: FLL FRAME: 42Y VOLTS: 277 PH: 1 AMPS: 0.8, 0.7, 0.5 HZ: 60 INS.: A AMB.: 40° C DUTY: AIR OVER CAP.: 5 MFD/370 V UL LOGO CSA LOGO THERMALLY PROTECTED TYPE C																																					
		NAMEPLATE DATA:	EXTERNAL CONNECTION DIAGRAM																																						
MODEL NO.: 322P241 CUST. P/N: 7DB6503 HP: 1/8, 1/10, 1/12 ROT.: CCWLE RPM: 1075 TYPE: FLL FRAME: 42Y VOLTS: 277 PH: 1 AMPS: 0.8, 0.7, 0.5 HZ: 60 INS.: A AMB.: 40° C DUTY: AIR OVER CAP.: 5 MFD/370 V UL LOGO CSA LOGO THERMALLY PROTECTED TYPE C																																									
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>GREEN (GRD)</th> <th>CONNECTED TO BASE</th> <th>#8 EYELET</th> </tr> </thead> <tbody> <tr> <td>BROWN</td> <td>23.0/25.0 [584/635]</td> <td>.25[6.4] FEMALE SPADE</td> </tr> <tr> <td>BROWN</td> <td>23.0/25.0 [584/635]</td> <td>.25[6.4] FEMALE SPADE</td> </tr> <tr> <td>RED</td> <td>38.5/41.5 [978/1054]</td> <td>.25[6.4] FEMALE SPADE</td> </tr> <tr> <td>BLUE</td> <td>38.5/41.5 [978/1054]</td> <td>.25[6.4] FEMALE SPADE</td> </tr> <tr> <td>BLACK</td> <td>38.5/41.5 [978/1054]</td> <td>.25[6.4] FEMALE SPADE</td> </tr> <tr> <td>PURPLE</td> <td>38.5/41.5 [978/1054]</td> <td>.25[6.4] FEMALE SPADE</td> </tr> <tr> <td>COLOR</td> <td>LENGTH</td> <td>TERMINAL OR STRIP LENGTH</td> </tr> </tbody> </table>		GREEN (GRD)	CONNECTED TO BASE	#8 EYELET	BROWN	23.0/25.0 [584/635]	.25[6.4] FEMALE SPADE	BROWN	23.0/25.0 [584/635]	.25[6.4] FEMALE SPADE	RED	38.5/41.5 [978/1054]	.25[6.4] FEMALE SPADE	BLUE	38.5/41.5 [978/1054]	.25[6.4] FEMALE SPADE	BLACK	38.5/41.5 [978/1054]	.25[6.4] FEMALE SPADE	PURPLE	38.5/41.5 [978/1054]	.25[6.4] FEMALE SPADE	COLOR	LENGTH	TERMINAL OR STRIP LENGTH																
GREEN (GRD)	CONNECTED TO BASE	#8 EYELET																																							
BROWN	23.0/25.0 [584/635]	.25[6.4] FEMALE SPADE																																							
BROWN	23.0/25.0 [584/635]	.25[6.4] FEMALE SPADE																																							
RED	38.5/41.5 [978/1054]	.25[6.4] FEMALE SPADE																																							
BLUE	38.5/41.5 [978/1054]	.25[6.4] FEMALE SPADE																																							
BLACK	38.5/41.5 [978/1054]	.25[6.4] FEMALE SPADE																																							
PURPLE	38.5/41.5 [978/1054]	.25[6.4] FEMALE SPADE																																							
COLOR	LENGTH	TERMINAL OR STRIP LENGTH																																							
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>PERFORMANCE CURVE NO.</th> <th>TORQUE @ 1075 RPM (25°C)</th> <th>APPROVED SAMPLE</th> <th>UL COMPONENT</th> <th colspan="2">CSA</th> </tr> <tr> <th></th> <th></th> <th></th> <th>FILE #</th> <th>CCN #</th> <th>FILE # CLASS #</th> </tr> </thead> <tbody> <tr> <td>C32107</td> <td>6.7 OZ. FT.</td> <td>PSC 7531</td> <td>E46412</td> <td>PRGY2</td> <td>LR43341 4211-01</td> </tr> </tbody> </table>		PERFORMANCE CURVE NO.	TORQUE @ 1075 RPM (25°C)	APPROVED SAMPLE	UL COMPONENT	CSA					FILE #	CCN #	FILE # CLASS #	C32107	6.7 OZ. FT.	PSC 7531	E46412	PRGY2	LR43341 4211-01	<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">ENCLOSURE</th> <th>CUSTOMER</th> <th>DISTRIBUTION SERVICE</th> </tr> </thead> <tbody> <tr> <td>MAIN FRAME - OLE</td> <td>OPEN</td> <td></td> <td></td> </tr> <tr> <td>END FRAME - OLE</td> <td>OPEN</td> <td></td> <td></td> </tr> <tr> <td>MAIN FRAME - LE</td> <td>OPEN</td> <td></td> <td></td> </tr> <tr> <td>END FRAME - LE</td> <td>OPEN</td> <td></td> <td></td> </tr> </tbody> </table>		ENCLOSURE		CUSTOMER	DISTRIBUTION SERVICE	MAIN FRAME - OLE	OPEN			END FRAME - OLE	OPEN			MAIN FRAME - LE	OPEN			END FRAME - LE	OPEN		
PERFORMANCE CURVE NO.	TORQUE @ 1075 RPM (25°C)	APPROVED SAMPLE	UL COMPONENT	CSA																																					
			FILE #	CCN #	FILE # CLASS #																																				
C32107	6.7 OZ. FT.	PSC 7531	E46412	PRGY2	LR43341 4211-01																																				
ENCLOSURE		CUSTOMER	DISTRIBUTION SERVICE																																						
MAIN FRAME - OLE	OPEN																																								
END FRAME - OLE	OPEN																																								
MAIN FRAME - LE	OPEN																																								
END FRAME - LE	OPEN																																								
<b>GEOMETRIC CHARACTERISTICS &amp; SYMBOLS</b> □ FLATNESS — STRAIGHTNESS ∠ ANGULARITY ⊥ PERPENDICULARITY (SQUARENESS) ∥ PARALLELISM ○ ROUNDNESS (CIRCULARITY) ⌀ CYLINDRICITY ~ PROFILE OF ANY SURFACE ~ PROFILE OF ANY LINE † RUNOUT ⊕ TRUE POSITION ⊙ CONCENTRICITY = SYMMETRY		A.O. SMITH PROVIDES TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN SEVERAL AREAS. SINCE A.O. SMITH DOES NOT RECEIVE ALL DATA CONCERNING THE USE AND APPLICATION OF THE MOTOR, THE SUITABILITY OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY THE CUSTOMER.  DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY.																																							
DR BY: J. RUPERT 02-19-1996 APPD: W. HEATH 03-01-1996 THRD ANGLE PROJECTION:		EDS DATE: 02-22-2008 FORMAT REV: F DESCRIPTION: OUTLINE SIZE: C DWG NO: 11927-017 SCALE: NONE SHEET: 1																																							
4	3	2	1																																						

<p><b>INFORMACION GENERAL:</b></p> <p>OSCILACION DE FLECHA: -</p> <p>JUEGO AXIAL: -</p> <p>BALEROS: -</p> <p>POSICION DEL MONTAJE: -</p> <p><b>INFORMACION ELECTRICA:</b></p> <p>PROTECTOR DE SOBRECARGA: -</p> <p>CABLES: -</p> <p>CABLE DE TIERRA: -</p>		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>REVISION:</td> <td>ECO</td> <td>REVISADO POR:</td> <td>FECHA:</td> <td>APROBADO POR:</td> <td>FECHA:</td> </tr> <tr> <td>B</td> <td>0007689</td> <td>PEDRO AVILEZ</td> <td>07-27-2009</td> <td>JOSUE ORTEGA</td> <td>07-27-2009</td> </tr> </table>	REVISION:	ECO	REVISADO POR:	FECHA:	APROBADO POR:	FECHA:	B	0007689	PEDRO AVILEZ	07-27-2009	JOSUE ORTEGA	07-27-2009	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>MODEL NO.:</td> <td>322P241</td> </tr> <tr> <td>CUST. P/N:</td> <td>7DB6503</td> </tr> <tr> <td>HP:</td> <td>1/8, 1/10, 1/12</td> </tr> <tr> <td>ROT.:</td> <td>CCWLE</td> </tr> <tr> <td>RPM:</td> <td>1075</td> </tr> <tr> <td>TYPE:</td> <td>FLL</td> </tr> <tr> <td>FRAME:</td> <td>42Y</td> </tr> <tr> <td>VOLTS:</td> <td>277</td> </tr> <tr> <td>PH:</td> <td>1</td> </tr> <tr> <td>AMPS:</td> <td>0.8, 0.7, 0.5</td> </tr> <tr> <td>HZ:</td> <td>60</td> </tr> <tr> <td>INS.:</td> <td>A</td> </tr> <tr> <td>AMB.:</td> <td>40° C</td> </tr> <tr> <td>DUTY:</td> <td>AIR OVER</td> </tr> <tr> <td>CAP.:</td> <td>5 MFD/370 V</td> </tr> <tr> <td>UL LOGO</td> <td></td> </tr> <tr> <td>CSA LOGO</td> <td></td> </tr> <tr> <td>THERMALLY PROTECTED</td> <td></td> </tr> <tr> <td>TYPE C</td> <td></td> </tr> </table>	MODEL NO.:	322P241	CUST. P/N:	7DB6503	HP:	1/8, 1/10, 1/12	ROT.:	CCWLE	RPM:	1075	TYPE:	FLL	FRAME:	42Y	VOLTS:	277	PH:	1	AMPS:	0.8, 0.7, 0.5	HZ:	60	INS.:	A	AMB.:	40° C	DUTY:	AIR OVER	CAP.:	5 MFD/370 V	UL LOGO		CSA LOGO		THERMALLY PROTECTED		TYPE C	
REVISION:	ECO	REVISADO POR:	FECHA:	APROBADO POR:	FECHA:																																																
B	0007689	PEDRO AVILEZ	07-27-2009	JOSUE ORTEGA	07-27-2009																																																
MODEL NO.:	322P241																																																				
CUST. P/N:	7DB6503																																																				
HP:	1/8, 1/10, 1/12																																																				
ROT.:	CCWLE																																																				
RPM:	1075																																																				
TYPE:	FLL																																																				
FRAME:	42Y																																																				
VOLTS:	277																																																				
PH:	1																																																				
AMPS:	0.8, 0.7, 0.5																																																				
HZ:	60																																																				
INS.:	A																																																				
AMB.:	40° C																																																				
DUTY:	AIR OVER																																																				
CAP.:	5 MFD/370 V																																																				
UL LOGO																																																					
CSA LOGO																																																					
THERMALLY PROTECTED																																																					
TYPE C																																																					
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>INFORMACION DE ETIQUETA:</th> <th>DIAGRAMA DE CONEXION EXTRNA</th> </tr> <tr> <td> <p>RED — LO ●</p> <p>BLU — MED ●</p> <p>BLK — HI ●</p> <p>PUR —</p> <p>BRN —</p> <p>BRN —</p> </td> <td> </td> </tr> </table>	INFORMACION DE ETIQUETA:	DIAGRAMA DE CONEXION EXTRNA	<p>RED — LO ●</p> <p>BLU — MED ●</p> <p>BLK — HI ●</p> <p>PUR —</p> <p>BRN —</p> <p>BRN —</p>		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>23.0/25.0</td> <td></td> <td></td> </tr> <tr> <td>[584/635]</td> <td></td> <td></td> </tr> <tr> <td>23.0/25.0</td> <td></td> <td></td> </tr> <tr> <td>[584/635]</td> <td></td> <td></td> </tr> <tr> <td>-</td> <td>38.5/41.5</td> <td>-</td> </tr> <tr> <td>-</td> <td>[978/1054]</td> <td>-</td> </tr> <tr> <td>-</td> <td>38.5/41.5</td> <td>-</td> </tr> <tr> <td>-</td> <td>[978/1054]</td> <td>-</td> </tr> <tr> <td>-</td> <td>38.5/41.5</td> <td>-</td> </tr> <tr> <td>-</td> <td>[978/1054]</td> <td>-</td> </tr> <tr> <td>-</td> <td>38.5/41.5</td> <td>-</td> </tr> <tr> <td>-</td> <td>[978/1054]</td> <td>-</td> </tr> <tr> <td>COLOR</td> <td>LONGITUD</td> <td>TERMINAL O LONGITUD DE DESFORRE</td> </tr> </table>	23.0/25.0			[584/635]			23.0/25.0			[584/635]			-	38.5/41.5	-	-	[978/1054]	-	-	38.5/41.5	-	-	[978/1054]	-	-	38.5/41.5	-	-	[978/1054]	-	-	38.5/41.5	-	-	[978/1054]	-	COLOR	LONGITUD	TERMINAL O LONGITUD DE DESFORRE	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>CARCASA - LOC</td> <td>-</td> </tr> <tr> <td>TAPA - LOC</td> <td>-</td> </tr> <tr> <td>CARCASA - LC</td> <td>-</td> </tr> <tr> <td>TAPA - LC</td> <td>-</td> </tr> </table>	CARCASA - LOC	-	TAPA - LOC	-	CARCASA - LC	-	TAPA - LC	-
INFORMACION DE ETIQUETA:	DIAGRAMA DE CONEXION EXTRNA																																																				
<p>RED — LO ●</p> <p>BLU — MED ●</p> <p>BLK — HI ●</p> <p>PUR —</p> <p>BRN —</p> <p>BRN —</p>																																																					
23.0/25.0																																																					
[584/635]																																																					
23.0/25.0																																																					
[584/635]																																																					
-	38.5/41.5	-																																																			
-	[978/1054]	-																																																			
-	38.5/41.5	-																																																			
-	[978/1054]	-																																																			
-	38.5/41.5	-																																																			
-	[978/1054]	-																																																			
-	38.5/41.5	-																																																			
-	[978/1054]	-																																																			
COLOR	LONGITUD	TERMINAL O LONGITUD DE DESFORRE																																																			
CARCASA - LOC	-																																																				
TAPA - LOC	-																																																				
CARCASA - LC	-																																																				
TAPA - LC	-																																																				
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>CURVAS DE FUNCIONAMIENTO</th> <th>TORSION @ RPM (25°C)</th> <th>MUESTRA APROBADA</th> <th>COMPONENTE UL</th> <th>CSA</th> </tr> <tr> <td>C32107</td> <td>6.7 OZ. FT.</td> <td>PSC 7531</td> <td>E46412 PRGY2</td> <td>LR43341 4211-01</td> </tr> </table>	CURVAS DE FUNCIONAMIENTO	TORSION @ RPM (25°C)	MUESTRA APROBADA	COMPONENTE UL	CSA	C32107	6.7 OZ. FT.	PSC 7531	E46412 PRGY2	LR43341 4211-01	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th colspan="2">INFORMACION DE CABLES</th> <th colspan="2">TIPO DE MOTOR</th> <th>CLIENTE</th> <th>DISTRIBUTION SERVICE</th> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	INFORMACION DE CABLES		TIPO DE MOTOR		CLIENTE	DISTRIBUTION SERVICE							<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td> <p><b>ACSmith</b> Innovation has a name.</p> <p><b>ELECTRICAL PRODUCTS COMPANY</b> A DIVISION OF A. O. SMITH CORPORATION</p> </td> <td> <p>DESCRIPCION: OUTLINE</p> <p>TAMAÑO: C</p> <p>NUMERO DE DIBUJO: 11927-017</p> <p>ESCALA: NONE</p> <p>HOJA: 1</p> </td> </tr> </table>	<p><b>ACSmith</b> Innovation has a name.</p> <p><b>ELECTRICAL PRODUCTS COMPANY</b> A DIVISION OF A. O. SMITH CORPORATION</p>	<p>DESCRIPCION: OUTLINE</p> <p>TAMAÑO: C</p> <p>NUMERO DE DIBUJO: 11927-017</p> <p>ESCALA: NONE</p> <p>HOJA: 1</p>																											
CURVAS DE FUNCIONAMIENTO	TORSION @ RPM (25°C)	MUESTRA APROBADA	COMPONENTE UL	CSA																																																	
C32107	6.7 OZ. FT.	PSC 7531	E46412 PRGY2	LR43341 4211-01																																																	
INFORMACION DE CABLES		TIPO DE MOTOR		CLIENTE	DISTRIBUTION SERVICE																																																
<p><b>ACSmith</b> Innovation has a name.</p> <p><b>ELECTRICAL PRODUCTS COMPANY</b> A DIVISION OF A. O. SMITH CORPORATION</p>	<p>DESCRIPCION: OUTLINE</p> <p>TAMAÑO: C</p> <p>NUMERO DE DIBUJO: 11927-017</p> <p>ESCALA: NONE</p> <p>HOJA: 1</p>																																																				
<p><b>CARACTERISTICAS DE GEOMETRIA Y SIMBOLOS</b></p> <p>□ PLANICIDAD</p> <p>— RECTITUD</p> <p>∠ ANGULARIDAD</p> <p>⊥ PERPENDICULARIDAD (A ESQUADRA)</p> <p>∥ PARALELISMO</p> <p>○ REDONDEZ (CIRCULARIDAD)</p> <p>⊘ CILINDRICIDAD</p> <p>⊖ PERFIL DE CUALQUIER SUPERFICIE</p> <p>⊖ PERFIL DE CUALQUIER LINEA</p> <p>↑ VARIACION</p> <p>⊕ POSICION REAL</p> <p>⊙ CONCENTRICIDAD</p> <p>≡ SIMETRIA</p>	<p>A.O. SMITH PROVEE ASISTENCIA TECNICA A NUESTROS CLIENTES EN VARIAS AREAS. DESDE QUE A.O. SMITH NO RECIBE TODOS LOS DATOS EN RELACION AL USO Y A LA APLICACION DEL MOTOR, LA APLICACION ADECUADA DEL MOTOR DEBE SER DETERMINADA POR EL CLIENTE.</p> <p>DIMENSIONES SIN TOLERANCIA SON DE REFERENCIA SOLAMENTE</p>	<p>DIBUJADO POR: J. RUPERT</p> <p>APROBADO POR: W. HEATH</p> <p>TERCER ANGULO DE PROYECCION</p> <p>FECHA EDS: 02-22-2008</p> <p>REV. FORMATO: F</p> <p>CONFIDENCIAL: ESTE DIBUJO Y SU INFORMACION SON PROPIEDAD DE USO EXCLUSIVO Y CONFIDENCIAL DE A.O. SMITH CORP. Y NO DEBERAN SER REVELADOS, DUPLICADOS, DISTRIBUIDOS O USARSE DE OTRA MANERA SIN EL CONSENTIMIENTO ESCRITO DE A.O. SMITH CORP. - TODOS LOS DERECHOS RESERVADOS. ASME Y14.5M 1994</p>	<p>02-19-1996</p> <p>03-01-1996</p>																																																		

<p>总技术要求:</p> <p>轴跳动:</p> <p>端部窜动量</p> <p>轴承:</p> <p>安装位置:</p> <p>电气数据:</p> <p>过载保护:</p> <p>引线:</p> <p>接地线:</p>		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:10%;"></td> <td style="width:10%;">ECO</td> <td style="width:10%;">PEDRO AVILEZ</td> <td style="width:10%;">07-27-2009</td> <td style="width:10%;">JOSUE ORTEGA</td> <td style="width:10%;">07-27-2009</td> </tr> </table>		ECO	PEDRO AVILEZ	07-27-2009	JOSUE ORTEGA	07-27-2009	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:10%;"></td> <td style="width:10%;"></td> <td style="width:10%;"></td> <td style="width:10%;"></td> <td style="width:10%;"></td> <td style="width:10%;"></td> </tr> </table>																																													
	ECO	PEDRO AVILEZ	07-27-2009	JOSUE ORTEGA	07-27-2009																																																	
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:50%;">铭牌数据</th> <th style="width:50%;">外部数据线</th> </tr> <tr> <td style="vertical-align: top;"> <p>MODEL NO.: 322P241 CUST. P/N: 7DB6503 HP: 1/8, 1/10, 1/12 ROT.: CCWLE RPM: 1075 TYPE: FLL FRAME: 42Y VOLTS: 277 PH: 1 AMPS: 0.8, 0.7, 0.5 HZ: 60 INS.: A AMB.: 40° C DUTY: AIR OVER CAP.: 5 MFD/370 V UL LOGO CSA LOGO THERMALLY PROTECTED TYPE C</p> </td> <td style="vertical-align: top;"> </td> </tr> </table>	铭牌数据	外部数据线	<p>MODEL NO.: 322P241 CUST. P/N: 7DB6503 HP: 1/8, 1/10, 1/12 ROT.: CCWLE RPM: 1075 TYPE: FLL FRAME: 42Y VOLTS: 277 PH: 1 AMPS: 0.8, 0.7, 0.5 HZ: 60 INS.: A AMB.: 40° C DUTY: AIR OVER CAP.: 5 MFD/370 V UL LOGO CSA LOGO THERMALLY PROTECTED TYPE C</p>		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>性能曲线编号</th> <th>转矩在 @ --- RPM (25° C)</th> <th>批准样品</th> <th colspan="2">UL部件</th> <th colspan="2">CSA</th> </tr> <tr> <td>C32107</td> <td>6.7 OZ. FT.</td> <td>PSC 7531</td> <td>E46412</td> <td>PRGY2</td> <td>LR43341</td> <td>4211-01</td> </tr> </table>	性能曲线编号	转矩在 @ --- RPM (25° C)	批准样品	UL部件		CSA		C32107	6.7 OZ. FT.	PSC 7531	E46412	PRGY2	LR43341	4211-01	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>颜色</th> <th>长度</th> <th>端子或剥线长度</th> </tr> <tr> <td></td> <td>23.0/25.0 [584/635]</td> <td></td> </tr> <tr> <td></td> <td>23.0/25.0 [584/635]</td> <td></td> </tr> <tr> <td></td> <td>38.5/41.5 [978/1054]</td> <td></td> </tr> <tr> <td></td> <td>38.5/41.5 [978/1054]</td> <td></td> </tr> <tr> <td></td> <td>38.5/41.5 [978/1054]</td> <td></td> </tr> <tr> <td></td> <td>38.5/41.5 [978/1054]</td> <td></td> </tr> </table>	颜色	长度	端子或剥线长度		23.0/25.0 [584/635]			23.0/25.0 [584/635]			38.5/41.5 [978/1054]			38.5/41.5 [978/1054]			38.5/41.5 [978/1054]			38.5/41.5 [978/1054]		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>无引线端机壳</td> <td></td> </tr> <tr> <td>无引线端端盖</td> <td></td> </tr> <tr> <td>有引线端机壳</td> <td></td> </tr> <tr> <td>有引线端端盖</td> <td></td> </tr> </table>	无引线端机壳		无引线端端盖		有引线端机壳		有引线端端盖		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>密封性</td> <td>用户</td> <td>DISTRIBUTION SERVICE</td> </tr> </table>	密封性	用户	DISTRIBUTION SERVICE
铭牌数据	外部数据线																																																					
<p>MODEL NO.: 322P241 CUST. P/N: 7DB6503 HP: 1/8, 1/10, 1/12 ROT.: CCWLE RPM: 1075 TYPE: FLL FRAME: 42Y VOLTS: 277 PH: 1 AMPS: 0.8, 0.7, 0.5 HZ: 60 INS.: A AMB.: 40° C DUTY: AIR OVER CAP.: 5 MFD/370 V UL LOGO CSA LOGO THERMALLY PROTECTED TYPE C</p>																																																						
性能曲线编号	转矩在 @ --- RPM (25° C)	批准样品	UL部件		CSA																																																	
C32107	6.7 OZ. FT.	PSC 7531	E46412	PRGY2	LR43341	4211-01																																																
颜色	长度	端子或剥线长度																																																				
	23.0/25.0 [584/635]																																																					
	23.0/25.0 [584/635]																																																					
	38.5/41.5 [978/1054]																																																					
	38.5/41.5 [978/1054]																																																					
	38.5/41.5 [978/1054]																																																					
	38.5/41.5 [978/1054]																																																					
无引线端机壳																																																						
无引线端端盖																																																						
有引线端机壳																																																						
有引线端端盖																																																						
密封性	用户	DISTRIBUTION SERVICE																																																				
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:20%;"> <p>????</p> <p>□???</p> <p>-???</p> <p>∠???</p> <p>∟???</p> <p>∥???</p> <p>○??</p> <p>⊕???</p> <p>⊖???</p> <p>⊗???</p> <p>⊙???</p> <p>⊕???</p> <p>⊖???</p> <p>⊗???</p> <p>⊙???</p> </td> <td style="width:20%;"> <p>A.O.SMITH???????</p> <p>?????????A.O.SMITH</p> <p>?????????????</p> <p>???????????????</p> <p>???????????????</p> <p>?????????????</p> </td> <td style="width:20%;"> <p>???</p> <p>J. RUPERT</p> <p>02-19-1996</p> <p>???</p> <p>W. HEATH</p> <p>03-01-1996</p> <p>?????</p> <p>⊕???</p> <p>02-22-2008</p> <p>???????</p> <p>F</p> <p>???: ?????????????A.O.SMITH?????</p> <p>???A.O.SMITH????????????????????</p> <p>??????-?????</p> </td> <td style="width:40%;"> <p><b>ACSmith</b> ELECTRICAL PRODUCTS COMPANY</p> <p><small>innovation has a name.</small></p> <p>A DIVISION OF A. O. SMITH CORPORATION</p> <p>OUTLINE</p> <p>C ?? 11927-017</p> <p>?? NONE ?? 1</p> </td> </tr> </table>	<p>????</p> <p>□???</p> <p>-???</p> <p>∠???</p> <p>∟???</p> <p>∥???</p> <p>○??</p> <p>⊕???</p> <p>⊖???</p> <p>⊗???</p> <p>⊙???</p> <p>⊕???</p> <p>⊖???</p> <p>⊗???</p> <p>⊙???</p>	<p>A.O.SMITH???????</p> <p>?????????A.O.SMITH</p> <p>?????????????</p> <p>???????????????</p> <p>???????????????</p> <p>?????????????</p>	<p>???</p> <p>J. RUPERT</p> <p>02-19-1996</p> <p>???</p> <p>W. HEATH</p> <p>03-01-1996</p> <p>?????</p> <p>⊕???</p> <p>02-22-2008</p> <p>???????</p> <p>F</p> <p>???: ?????????????A.O.SMITH?????</p> <p>???A.O.SMITH????????????????????</p> <p>??????-?????</p>	<p><b>ACSmith</b> ELECTRICAL PRODUCTS COMPANY</p> <p><small>innovation has a name.</small></p> <p>A DIVISION OF A. O. SMITH CORPORATION</p> <p>OUTLINE</p> <p>C ?? 11927-017</p> <p>?? NONE ?? 1</p>	<p>ASME Y14.5M 1994</p>																																																	
<p>????</p> <p>□???</p> <p>-???</p> <p>∠???</p> <p>∟???</p> <p>∥???</p> <p>○??</p> <p>⊕???</p> <p>⊖???</p> <p>⊗???</p> <p>⊙???</p> <p>⊕???</p> <p>⊖???</p> <p>⊗???</p> <p>⊙???</p>	<p>A.O.SMITH???????</p> <p>?????????A.O.SMITH</p> <p>?????????????</p> <p>???????????????</p> <p>???????????????</p> <p>?????????????</p>	<p>???</p> <p>J. RUPERT</p> <p>02-19-1996</p> <p>???</p> <p>W. HEATH</p> <p>03-01-1996</p> <p>?????</p> <p>⊕???</p> <p>02-22-2008</p> <p>???????</p> <p>F</p> <p>???: ?????????????A.O.SMITH?????</p> <p>???A.O.SMITH????????????????????</p> <p>??????-?????</p>	<p><b>ACSmith</b> ELECTRICAL PRODUCTS COMPANY</p> <p><small>innovation has a name.</small></p> <p>A DIVISION OF A. O. SMITH CORPORATION</p> <p>OUTLINE</p> <p>C ?? 11927-017</p> <p>?? NONE ?? 1</p>																																																			