




## Design and genius in one.

Aesthetically designed to integrate seamlessly with suspended ceilings.

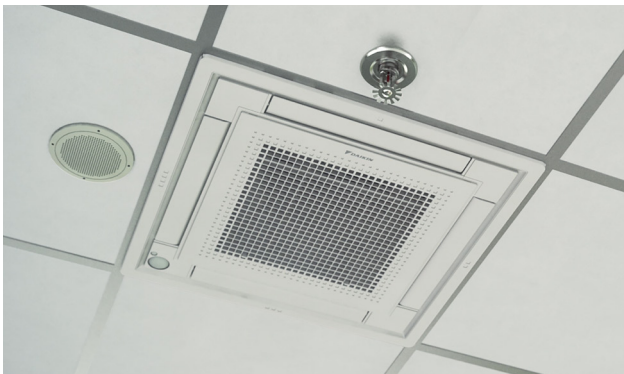

### Designer Comfort

VISTA is a remarkable blend of iconic design and engineering excellence with an elegant white or a silver and white finish. Fitting within the ceiling grid and discreetly mounted to the ceiling itself, VISTA is stylish, low profile, and compact. High efficiency and comfort is delivered through the combined use of floor and presence sensors (optional). It is also possible to close individual louvers via the wired remote control for personalized comfort.



### Features

- » Seamless integration in standard architectural ceiling tiles, leaving only 5/16"
- » High efficiencies with up to 20.9 SEER and up to 11.7 HSPF.
- » Reduced energy consumption thanks to specially developed small tube heat exchanger, DC fan motor, and two optional intelligent sensors.
- » Remarkable blend of iconic design and engineering excellence with an elegant finish in white, or a combination of silver and white.
- » No optional adapter needed for DIII-connection, link your unit into the wider building management system.
- » Fresh air integration possible.
- » 12-Year Parts Limited Warranty\*



\* Complete warranty details available from your local dealer or at [www.daikincomfort.com](http://www.daikincomfort.com). To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec.

Model	Indoor Unit		FFQ09Q2VJU		FFQ12Q2VJU		FFQ15Q2VJU		FFQ18Q2VJU		
	Outdoor Unit		RX09RMVJU		RX12RMVJU		RX15RMVJU		RX18RMVJU		
	Capacity Rated (Min. ~ Max.)	Btu/h	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating	
Capacity Rated (Min. ~ Max.)	Btu/h	9,100 (4,600 ~ 11,000)	10,000 (4,600 ~ 14,000)	10,800 (4,600 ~ 13,300)	13,500 (4,600 ~ 16,800)	14,400 (5,100 ~ 16,200)	16,200 (5,200 ~ 16,300)	17,400 (5,100 ~ 18,800)	21,600 (5,400 ~ 21,800)		
Moisture Removal	gal/h	N/A	–	N/A	–	N/A	–	N/A	–		
COP Rated			4.58		4.02		3.86		3.36		
EER Rated			13.0		12.5		12.5		12.5		
SEER			20.9		20.2		20.7		19.3		
HSPF			11.7		11.2		11.0		10.1		
Piping Connections	Liquid	in. (mm)	Ø 1/4 (Ø 6.4)								
	Gas		Ø 3/8 (Ø 9.5)				Ø 1/2 (Ø 12.7)				
	Drain		Ø1-1/32 (Ø 26.0)								
Max. Interunit Piping Length				65-5/8 (20)			98-7/16 (30)				
Max. Interunit Height Difference				49-1/4 (15)			65-5/8 (20)				
Chargeless						32-13/16 (10)					
Amount of Additional Charge of Refrigerant	oz/ft (g/m)					0.21 (20)					
Operating Range - Cooling						50 ° - 115 °F					
Operating Range - Low-Ambient Cooling*	°F DB					14 ° - 115 °F					
Operating Range - Cooling with Optional Air Adjustment Grille*						-4 ° - 115 °F					
Operating Range - Heating	°F WB					5 ° - 65 °					
Indoor Unit			FFQ09Q2VJU		FFQ12Q2VJU		FFQ15Q2VJU		FFQ18Q2VJU		
Airflow Rate	H	cfm (m³/min)	378 (10.7)	399 (11.3)	406 (11.5)	427 (12.1)	420 (11.9)	441 (12.5)	448 (12.7)	498 (14.1)	
	M		339 (9.6)	357 (10.1)	353 (10.0)	371 (10.5)	367 (10.4)	385 (10.9)	378 (10.7)	420 (11.9)	
	L		268 (7.6)	282 (8.0)	268 (7.6)	282 (8.0)	293 (8.3)	307 (8.7)	275 (7.8)	307 (8.7)	
	SL		–	–	–	–	–	–	–	–	–
Fan	Speed	Steps	Turbo Fan, 3 Steps, Quiet, Auto								
Air Direction Control			Right, Left, Horizontal, Downward								
Air Filter			Removable, Washable, Mildew Proof								
Dimensions (H x W x D)		in. (mm)	10-1/4 x 22-5/8 x 22-5/8 (260 x 575 x 575)								
Weight		lbs. (kg)	38 / 35 / 29				36 (16)		40 / 37 / 31		39 (17.5)
Sound Pressure Level (H / M / L / SL)		dB(A)	38 / 35 / 29		39 / 36 / 30		40 / 37 / 31		44 / 40 / 32		
Outdoor Unit			RX09RMVJU		RX12RMVJU		RX15RMVJU		RX18RMVJU		
Compressor	Motor Output	W	790				1,100		1,100		
Refrigerant	Type		R-410A								
	Charge	lbs. (kg)	2.09 (0.95)				2.49 (1.13)				
Airflow Rate	H	cfm (m³/min)	985 (27.9)	1,105 (31.3)		2,313 (65.53)	2,108 (59.3)	2,461 (69.7)	2,553 (72.3)		
Dimensions (H x W x D)		in. (mm)	21-5/8 x 26-9/16 x 11-3/16 (550 x 675 x 284)				28-15/16 x 34-1/4 x 12-5/8 (735 x 870 x 320)				
Weight		lbs. (kg)	60 (27)				97 (44)				
Sound Pressure Level	H	dB(A)	46	50	49	51	50	51	54	55	
ENERGY STAR® Certified**			YES		YES		YES		YES		

\*Cutting a jumper or a dipswitch setting is required. Refer to installation manual.

## Standard Features:

### Draft Prevention




This system directs warm air to the floor in winter and cool air across the room in summer for optimal efficiency and comfort. The large flap governs airflow direction while the small flap (or diffuser) swings, producing fine air currents that help circulate the air around the room.



Shown with panel  
BYFQ60C2W1W



Shown with panel  
BYFQ60C2W1S



RX15RMVJU

### Individual Louver Control



The new louver changes the delivery angle to horizontal for cooling and vertical for heating operation, to keep cold or warm air from blowing directly onto your body.

## ADDITIONAL INFORMATION

Before purchasing this appliance, read important information about its estimated annual energy consumption, yearly operating cost, or energy efficiency rating that is available from your retailer.

Visit [www.daikincomfort.com](http://www.daikincomfort.com)

## Included in the optional sensor kit:

### Presence and Floor Sensor

Optional part #BRYQ60A2(W/S)



The presence and floor sensors are infrared sensors with the ability to sense movement in the room. When you are in the room, the system operates normally. If you leave the room for more than 20 minutes the system automatically changes to an energy-saving operation. Using the intelligent eye, savings of up to 20% in cooling and up to 30% in heating can be achieved. The floor sensor detects the average floor temperature and ensures even temperature distribution between ceiling and floor.



Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR® criteria. Ask your contractor for details or visit [www.energystar.gov](http://www.energystar.gov)

Daikin and its design are trademarks owned by Daikin.

Canada

**ENERGUIDE**

Seasonal Energy Efficiency Ratio (SEER)  
Ductless heat pump

THIS MODEL  
**20.0**

14.0 — Uses least energy —> 42.0



Our continuing commitment to quality products may mean a change in specifications without notice.  
© 2018 DAIKIN NORTH AMERICA LLC · Houston, Texas · USA · [www.daikincomfort.com](http://www.daikincomfort.com) or [www.daikinac.com](http://www.daikinac.com)

PF-VISTASZ 4-18