

Submittal Data Sheet

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	
Reference:	

Performance

Indoor Unit Model No:	CDXS18LVJU
Outdoor Unit Model No:	
Rated Cooling Capacity (Btu/hr):	18000
Sensible Capacity (Btu/hr):	N/A
Max/Min Cooling Capacity (Btu/hr / kW):	tabook/databook
Cooling Input Power (kW):	0.164
SEER:	data book
Rated Heating Capacity (Btu/hr):	21600
Max/Min Heating Capacity (Btu/hr / kW):	tabook/databook
Heating Input Power (kW):	0.164
Heating COP (Btu/hr / Btu/hr):	data book
HSPF:	data book

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Indoor Unit Type:	Concealed Ceiling (Low Static)
Condensing Unit Type:	
Datad Capling	Indoor: 80°F DB/67°F WB
Rated Cooling Conditions	Outdoor: 95°F DB/75°F WB
	Indoor: 70°F DB/60°F WB
Rated Heating Conditions	Outdoor: 47°F DB/43°F WB
Rated Piping Length(ft)	
Rated Height Separation(ft	

Indoor Unit Details

Power Supply (V/Hz/Ph:)	208-230/60/1ph
Power Supply Connections:	L1, L2, Ground
Min Circuit Amps MCA (A):	1
Max Overcurrent Amps MFA (A):	
Dimensions (HxWxD):	7-7/8x35-7/16x24-7/16
Panel (HxWxD):	N/A
Net Weight (lbs):	75
Weight with Panel (lbs):	

Condensing Unit Details

Power Supply (V/Hz/Ph):	
Power Supply Connections:	L1, L2, Ground
Min. Circuit Amps MCA (A):	
Max. Overcurrent Amps MFA (A):	
Max. Starting Current MSC(A):	
Rated Load Amps RLA (A):	
Dimensions (HxWxD):	N/A
Net Weight (lbs):	

Rated Height Separation(ft)Airflow Rate (CFM wet coil)424/353/297Moisture Removal (pt/h):2.9Gas Pipe Connection (inch):1/2

Moisture Removal (pt/h):	2.9
Gas Pipe Connection (inch):	1/2
Liquid Pipe Connection (inch):	1/4
Condensate Connection (inch):	25/32
Sound Pressure Level (dBA):	37
Sound Power Level (dBA):	
Static Pressure Rated/Max (inWg)	0.16/0.16

Compressor Type:	Inverter
Capacity Control Range (%):	
Airflow Rate (CFM):	
Gas Pipe Connection (inch):	
Liquid Pipe Connection (inch):	
Sound Pressure Level (dBA):	
Sound Power Level (dBA):	

System Details

Refrigerant Type:	R-410A
Holding Refrigerant Charge (lbs):	-
Additional Charge (oz/ft):	-
Pre-charge Piping (Length ft):	-
Max. Pipe Length (Total ft):	data book

Max. Pipe Length (Vertical ft):	data book
Cooling Operation Range (°F):	14 - 115
Cooling Range w/Baffle (°F):	
Heating Operation Range (°F):	5 - 64
Heating Range w/Baffle (°F):	




Submittal Data Sheet

Project Name:ApproLocation:ApproEngineer:Date:Submitted to:ConstSubmitted by:Unit #Reference:Drawi

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Dimensional Drawing - Indoor Unit

CDXS18LVJU

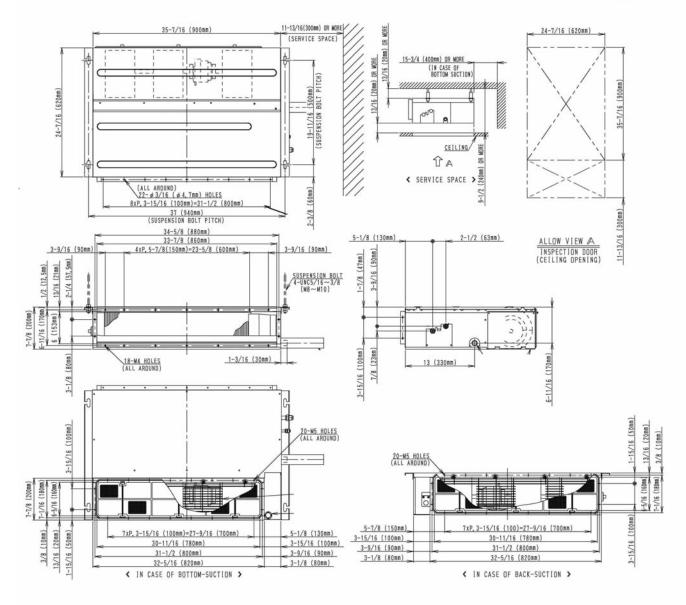

CDXS15_18LVJU

Daikin AC (Americas), Inc., 1645 Wallace Drive - Suite 110, Carrollton, TX 75006



Submittal Data Sheet

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	
Reference:	


Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	



CDXS18LVJU

Daikin AC TRL Generated Submittal Data

Options include Wind Baffle, Wired Remote Controller, Mounting Bracket, Std U.S. Warranty: 6yrs Compressor, 2yrs Parts

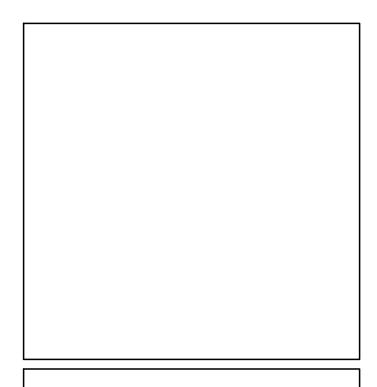

Options include Wind Baffle, Wired Remote Controller, Mounting Bracket, Std U.S. Warranty: 6yrs Compressor, 2yrs Parts

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)