

PRODUCT INFORMATION PACKET

FASCO®

Model No: D2816

Catalog No: D2816

1-1/2-1/3 HP OEM Replacement Motor, 1075 RPM, 3 Speed, 115 Volts, 48 Frame, OAO
HVAC/R OEM Replacement Motors



Regal and Fasco are trademarks of Regal Beloit Corporation or one of its affiliated companies.
©2019 Regal Beloit Corporation, All Rights Reserved. MC017097E

REGAL



Nameplate Specifications

Output HP	1-1/2-1/3 Hp	Output KW	0.75 kW
Frequency	60 Hz	Voltage	115 V
Current	11.0 A	Speed	1075 rpm
Service Factor	1	Phase	1
Duty	Continuous Air Over	Insulation Class	B
Frame	48	Enclosure	Open Air Over
Thermal Protection	Thermally Protected	Ambient Temperature	40 °C
UL	Recognized	CSA	Y
CE	N		


Technical Specifications

Electrical Type	Permanent Split Capacitor	Poles	6
Rotation	Reversible	Mounting	Resilient Rings
Motor Orientation	Hor	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	Double Flat	Overall Length	12.79 in
Frame Length	7.20 in	Shaft Diameter	0.620 in
Shaft Extension	4.16 in	Thru-bolts Extension	1.62 in

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:29/10/2019


DRAWING REVISION	REVISION BY	DATE
A	J. Rupert	11-08-2016
ECO-0112736	APPROVED BY J. Rupert	DATE 11-08-2016
ECO DESCRIPTION		
NEW DRAWING		


1.40 MAX.
[6.3516]

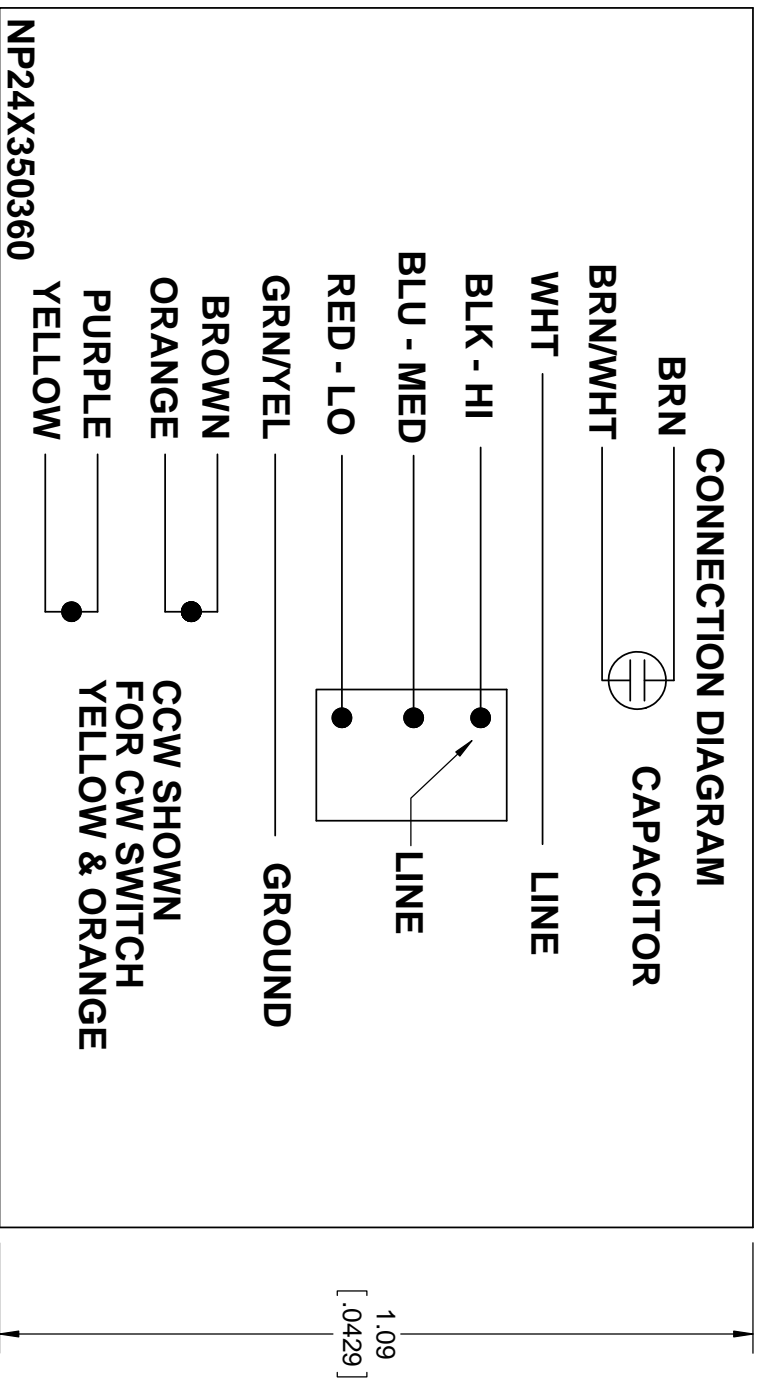

NOTES:

1. TYPE FACE: COLORS OR NUMBERS DENOTING LEAD IDENTIFICATION AND N.P. NUMBER ARE TO BE 18 POINT NEWS GOTHIC CONDENSED. OTHER INFORMATION SHOULD BE 18 POINT IF SPACE ALLOWS, OTHERWISE USE 14 POINT.
2. MATERIALS: 4 MIL WHITE VINYL ADHESIVE STOCK RBC SPEC A50FG41-S1 BLACK INK RBC SPEC A50FM48
3. THE BOX LINES AND DIMENSIONS REPRESENT THE SIZE OF THE TAPE TO BE USED. DO NOT INCLUDE THESE IN STAMP FORMAT.

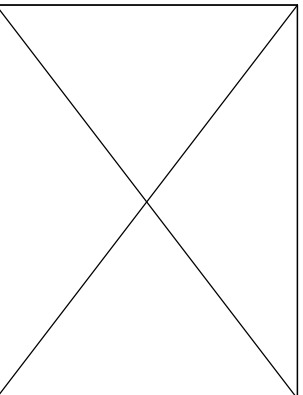

DRAWN BY J. Rupert		 Regal Beloit America, Inc.	
DATE 11-08-2016	APPROVED BY J. Rupert		
DATE 11-08-2016	REFERENCE	DESCRIPTION CONN DIAGRAM-EXTERNAL	
THIRD ANGLE PROJECTION	SIZE A	SEE NOTE - 2 DRAWING NUMBER NP24X350360	MATERIAL PROCESS/FINISH
			SHEET 1 OF 1