## PRODUCT INFORMATION PACKET



Model No: D728
Catalog No: D728

3/4-1/2-1/3 HP Fan & Blower Motor, 1075 RPM, 3 Speed, 115 Volts, 48 Frame, OAO

**Direct Drive Motors** 





Regal and Fasco are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2019 Regal Beloit Corporation, All Rights Reserved. MC017097E



## Nameplate Specifications

Output HP	3/4-1/2-1/3 Hp	Output KW	0.56 kW	
Frequency	60 Hz	Voltage	115 V	
Current	10.70 A	Speed	1075 rpm	
Service Factor	1	Phase	1	
Duty	Continuous Air Over	Insulation Class	В	
Frame	48	Enclosure	Open Air Over	
Thermal Protection	Thermally Protected	Ambient Temperature	40 °C	
UL	Recognized	CSA	Υ	
CE	N			

## **Technical Specifications**


Electrical Type	Permanent Split Capacitor	Poles	6	
Rotation	Reversible	Mounting	Resilient Rings	
Motor Orientation	Any	Drive End Bearing	Ball	
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel	
Shaft Type	Double Flat	Overall Length	12.14 in	
Frame Length	4.82 in	Shaft Diameter	0.500 in	
Shaft Extension	5.75 in	Thru-bolts Extension	N/R in	


This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:29/10/2019

REVISIONS NO [ LA ] AJS30

REV -

Convert to RBC Format JAR 18 2005



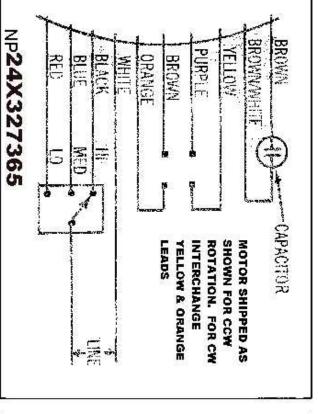

9

3 of 3

TYPE FACE: COLORS OR NUMBERS DENOTING LEAD IDENTIFICATION AND N.P. NUMBER ARE TO BE 18 POINT NEWS GOTHIC CONDENSED. OTHER INFORMATION SHOULD BE 18 POINT IF SPACE ALLOWS, OTHERWISE USE 14 POINT.

⇧

MATERIALS:

T-MIL WHITE VINYL ADHESIVE STOCK 33 SPEC ASDEG41-ST

BLACK INK GE SPEC ASOFM48

NOTE: THE BOX LINES AND DIMENSIONS REPRESENT THE SIZE OF THE TAPE TO BE USED. DO NOT INCLUDE THESE IN STAMP FORMAT.



REGAL-BELOIT CORPORATION

CONNECTION DIAGRAM

NP 24X327365

1-81

ON

4

CAS