



Submittal Data Sheet

FTXS24LVJU

FTXS24LVJU

FEATURES

- Intelligent eye occupancy sensor
- Weekly timer for programmable comfort
- Low ambient heat operation down to 0° F
- Titanium apatite photocatalytic air purifying
- 12 year limited parts and compressor warranty with online registration

BENEFITS

- Quiet operation





Submittal Data Sheet

FTXS24LVJU

FTXS24LVJU

PERFORMANCE

Indoor Unit Model No.	FTXS24LVJU	Indoor Unit Name:	FTXS24LVJU
Type:	Wall Mounted	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Rated Cooling Capacity (Btu/hr):	21,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 70 Ambient (°F DB/WB): 47 / 43
Sensible Capacity (Btu/hr):		Rated Piping Length(ft):	
Cooling Input Power (kW):	0.070	Rated Height Separation (ft):	
Rated Heating Capacity (Btu/hr):	25,400		
Heating Input Power (kW):	0.07		

INDOOR UNIT DETAILS


Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H/M/L/SL) (CFM):	643/494/350/328
Power Supply Connections:	L1, L2, Ground	Moisture Removal (Gal/hr):	9.6
Min. Circuit Amps MCA (A):		Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):		Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	13-3/8 x 41-5/16 x 9-3/4	Condensate Connection (inch):	5/8
Panel (HxWxD) (in):		Sound Pressure (H/M/L/SL) (dBA):	51/34/37/34
Net Weight (lb):	31	Sound Power Level (dBA):	67
Panel Weight (lb):		Ext. Static Pressure (Rated/Max) (inWg):	0.00 / 0.00

Submittal Data Sheet

FTXS24LVJU

FTXS24LVJU

DIMENSIONAL DRAWING

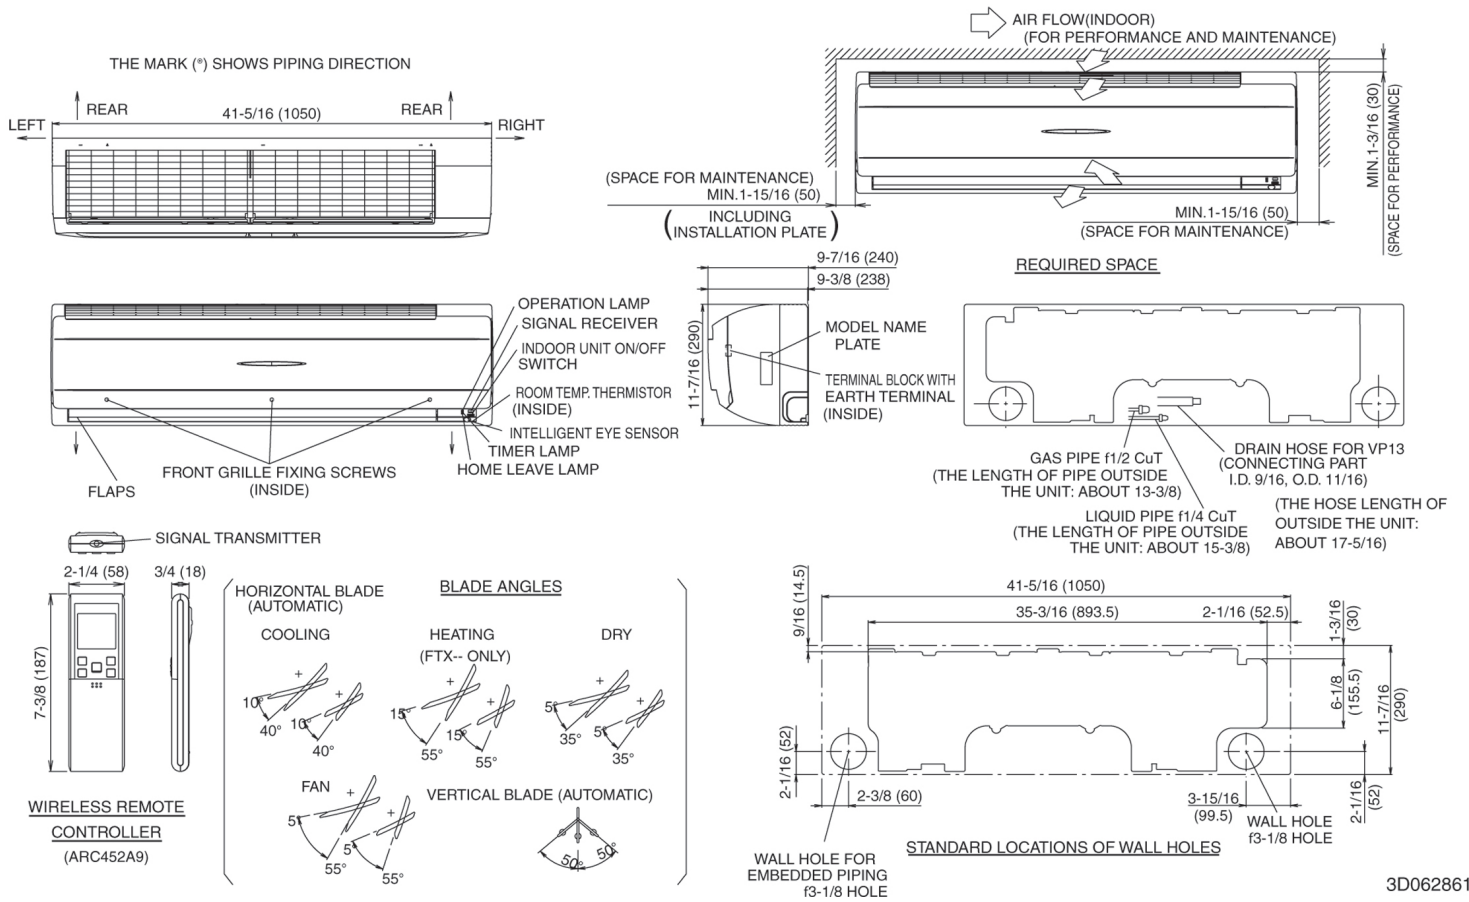

3D062861