

| Model Number | Nominal Size (W x H x D) | Actual Size (W x H x D) | Rated Airflow (CFM) | Initial Resistance (In. W.G.) | Media Area (Square Feet) |
|--------------|-----------------------------|----------------------------|---------------------------|-------------------------------------|-----------------------------|
| KP-STD2-1002 | 10X20X2 | 9-1/2X19-1/2X1-3/4 | 700 | 0.30 | 4.0 |
| KP-STD2-2002 | 12X20X2 | 11-1/2x19-1/2x1-3/4 | 840 | 0.30 | 4.8 |
| KP-STD2-2402 | 12X24X2 | 11-3/8x23-3/8x1-3/4 | 1000 | 0.30 | 5.7 |
| KP-STD2-4002 | 14X20X2 | 13-1/2x19-1/2x1-3/4 | 980 | 0.30 | 5.5 |
| KP-STD2-4502 | 14X25X2 | 13-1/2x24-1/2x1-3/4 | 1220 | 0.30 | 6.9 |
| KP-STD2-5002 | 15X20X2 | 14-1/2x19-1/2x1-3/4 | 1050 | 0.30 | 6.0 |
| KP-STD2-6602 | 16X16X2 | 15-3/4x15-3/4x1-3/4 | 890 | 0.30 | 5.3 |
| KP-STD2-6002 | 16X20X2 | 15-1/2x19-1/2x1-3/4 | 1120 | 0.30 | 6.5 |
| KP-STD2-6402 | 16X24X2 | 15-3/8x23-3/8x1-3/4 | 1340 | 0.30 | 7.5 |
| KP-STD2-6502 | 16X25X2 | 15-1/2x24-1/2x1-3/4 | 1400 | 0.30 | 8.2 |
| KP-STD2-8802 | 18X18X2 | 17-3/4x17-3/4x1-3/4 | 1125 | 0.30 | 6.6 |
| KP-STD2-8002 | 18X20X2 | 17-1/2x19-1/2x1-3/4 | 1250 | 0.30 | 7.3 |
| KP-STD2-8402 | 18X24X2 | 17-3/8x23-3/8x1-3/4 | 1500 | 0.30 | 8.7 |
| KP-STD2-8502 | 18X25X2 | 17-1/2x24-1/2x1-3/4 | 1570 | 0.30 | 9.2 |
| KP-STD2-0002 | 20X20X2 | 19-1/2x19-1/2x1-3/4 | 1400 | 0.30 | 8.0 |
| KP-STD2-0402 | 20X24X2 | 19-3/8x23-3/8x1-3/4 | 1670 | 0.30 | 9.6 |
| KP-STD2-0502 | 20X25X2 | 19-1/2x24-1/2x1-3/4 | 1750 | 0.30 | 10.1 |
| KP-STD2-0302 | 20X30X2* | 19-1/2x29-1/2x1-3/4 | 2085 | 0.30 | 12.2 |
| KP-STD2-4402 | 24X24X2 | 23-3/8x23-3/8x1-3/4 | 2000 | 0.30 | 11.8 |
| KP-STD2-5502 | 25X25X2 | 24-1/2x24-1/2x1-3/4 | 2170 | 0.30 | 12.9 |


* Reverse Pleat

STANDARD CONSTRUCTION

- 100% Synthetic, Self-Supporting Media
- 10.16 Pleats per Foot
- (3) Pleat Stabilizer Straps, Upstream Side
- Media Pack Support Grid, Downstream Side
- Moisture Resistant Beverage Board Frame

NOTES

- MERV 8 per ASHRAE 52.2-2007.
Tested at 492 FPM on 24x24x2 Nominal Size
- MERV-A 8-A ASHRAE 52.2-2007 Appendix J
2. Final Resistance: 1.0" W.G.
- Rated Velocity: 500 FPM
- Classified per UL Standard 900 for Flammability
- Maximum Operating Temperature: 150 deg. F

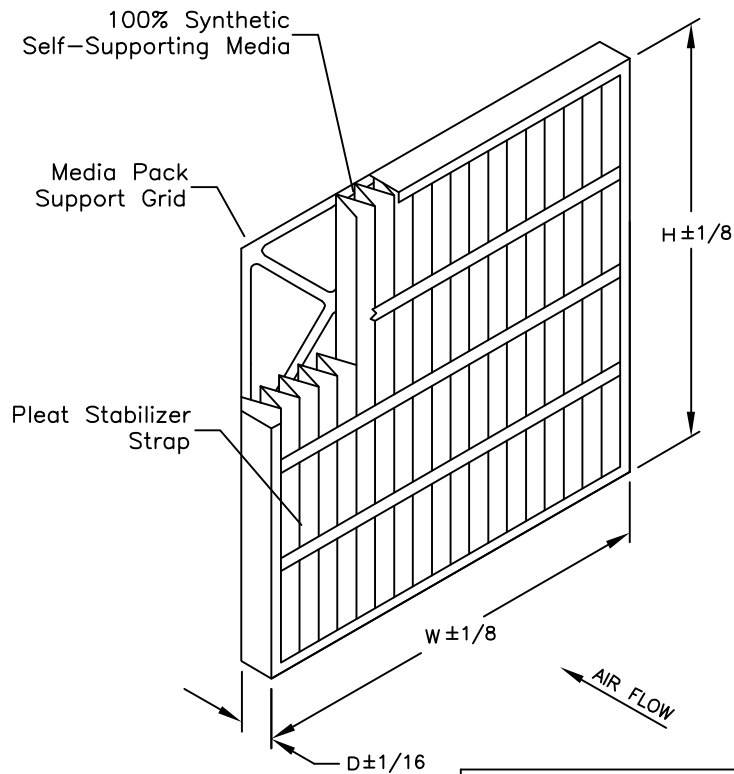

Purolator 100 River Ridge Circle
Jeffersonville, IN 47130
P: 866-925-2247
F: 502-961-0930
www.purolatorair.com

CONTACT FACTORY TO
VERIFY REVISION LEVEL

TOLERANCES
UNLESS OTHERWISE SPECIFIED

| | |
|------------|---|
| FRACTIONAL | - |
| DECIMAL | - |
| ANGLES | - |

ALL DIMENSIONS IN INCHES

DRAWING NAME
KEY PLEAT STANDARD-CAPACITY 2" DEPTH

| | | |
|--------------------------------|----------------------------------|--------------------------------|
| APPROVED BY <i>K. Quinn</i> | SPECIFICATION NO. MKT-P-00594 | PAGE 1 OF 1 |
| SCALE NONE | DWG. SIZE A | REVISION DATE F 12-09-13 |

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLC AIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.